
EXTERIOR FINISHES


EXTERIOR COLOUR SCHEME TO CONFORM TO NISSAN NETWORK 2000 EXTERIOR STANDARDS AS FOLLOWS:

* CLADDING - PEARL WHITE (RAL 1013)
* WINDOW FRAMES/DOORS - DARK GREY (BS 00A13) (SYNTHAPULVIN M4 L0004)
* WALLS/PAINTWORK - PEARL WHITE (DULUX NCS 1105Y18R)




SIGN D
FASCIA PROJECTOR
FPS 7806
DOUBLE SIDED
SCALE 1:50

0.78 m²

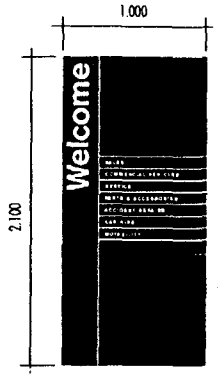

SIGN E 2.1 m²
PANEL ENTRANCE SIGN
WINDOW MOUNTED
ESP 1077
ESU 2033
SCALE 1:50

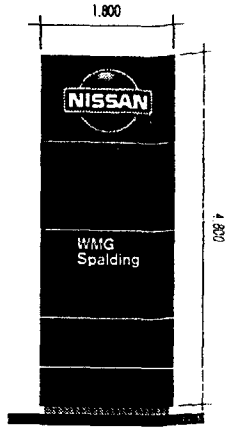


SIGN F
PRIME SIGN - DOUBLE SIDED
PSF 4000
PSU 7000
DNL 1150
150mm LETTERS
SCALE 1:100


8.64 m²


DETERMINED

SIGN D

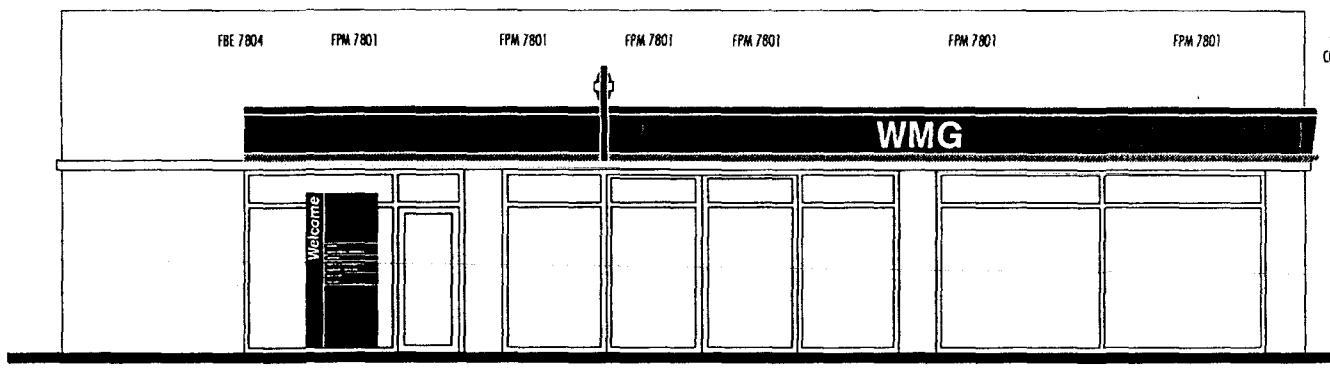

SIGN D

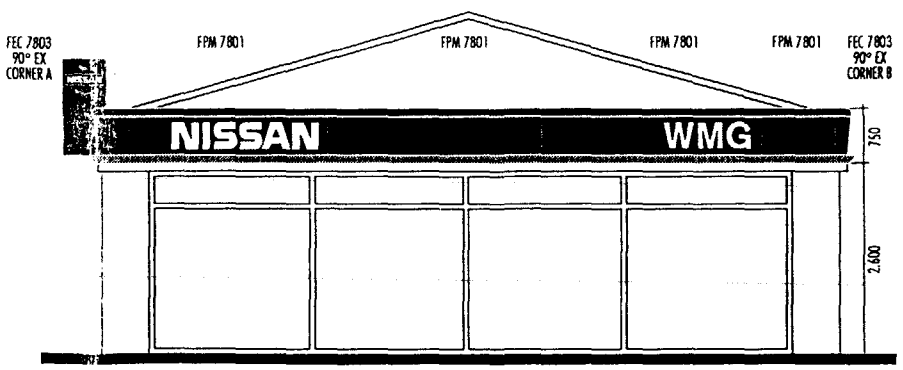

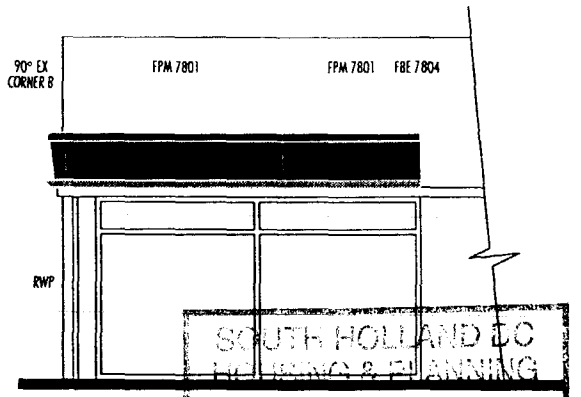

SOUTH HOLLAND DC
BUILDING & PLANNING
03 JUL 1995
Ref: 643/95

SIGN E

SIGN A 11 m²
14,690 X 750/SHALLOW FASCIA
INTEGRAL LIGHTING BAR
SCALE 1:100

SIGN B 7.68 m²
10,245 X 750/SHALLOW FASCIA
INTEGRAL LIGHTING BAR
SCALE 1:100

3.63m²

SIGN C
4840 X 750/SHALLOW FASCIA
INTEGRAL LIGHTING BAR
SCALE 1:100

SIGN COMPONENTS

SIGN A		SIGN B		SIGN C		SIGN D	
14,690	FBP 7000	10,245	FBP 7000	4,840	FBP 7000	1	FPS 7806
14,690	FPM 7800	10,245	FPM 7800	4,840	FPM 7800		
6	FPM 7801	4	FPM 7801	2	FPM 7801		
1	FBE 7804	2	FEC 7803	1	FBE 7804		
3	DNL 3500	3	DNL 3500				
		6	NFL 3500				

SIGN E		SIGN F	
1	ESP 1077	1	PSF 4000
1	ESU 2033	1	PSU 7000
		22	DNL 1150

REMOVALS/PLANT/SEEN VARIATIONS

DEALER RESPONSIBLE FOR MAKING GOOD BACKGROUND AREAS AFTER SIGNS HAVE BEEN REMOVED

22.850	REM 0001	REM EX FASCIA UP TO 1000mm
1	REM 0004	REM EX TOTEM SGN UP TO 3M
1	REM 0010	REM EX DIRECTION / LOCATION LAWN SIGN
1	ANC 0001	N2000 INSTALLATION & SITE VISIT
1	ANC 0003	N2000 CHECK SURVEY
1	ANC 0004	N2000 PRESENTATION PACK
1	ANC 0006	N2000 PLANNING APPLICATION
1	ANC 0007	INSTALLATION PHOTOGRAPHS
1	SVR 0015	SUP & INST 4800 PRIME SIGN F KERB SURROUND

SPECIFICATION

FOR SIGN SPECIFICATION SEE FORM N-TCP-2

FOR ATTENTION OF DEALER

ELECTRICAL SUPPLY
Please provide suitable low tension supply on the outside of the building to within 5 metres of each sign position and to the base of each free standing sign. See drawing for each sign current rating.


LIGHTING DETAILS

SIGN A	3.75 Amps
SIGN B	2.75 Amps
SIGN C	1.25 Amps
SIGN D	1.0 Amps
SIGN E	1.0 Amps
SIGN F	4.0 Amps

REMOVALS

R1 FASCIA 14.000
R2 FASCIA 8.850
R3 TOTEM
R4 LAWN SIGN

SITE PLAN
Not to scale

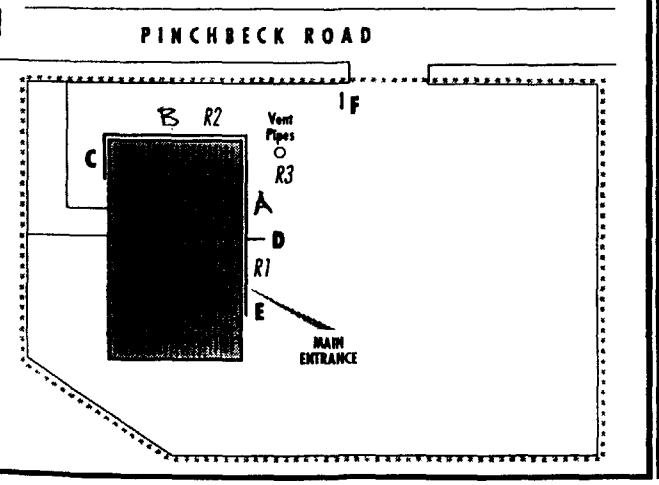

NISSAN

Futurama Signs Limited
Island Farm House
Island Farm Road
West Molesey
Surrey KT8 2TR
Tel: 081 941 1999

WMG SPALDING
PINCHBECK ROAD
SPALDING
LINCONSHIRE

Job No.	14404/1
Dealer Code	GBR 1326
Date	3/2/95

IMPORTANT DEALER NOTES

1. REMOVAL OF REDUNDANT SIGNAGE
Unless written instructions requesting that all removed redundant signage be left on site are received by the Contractor prior to commencement of works, all redundant signage will be taken from site and returned to the operating Depot for disposal. The Contractor accepts no responsibility for accidental damage to any redundant signage. The Contract is expressly limited to downvesting redundant signage. All consequential making good and the cost thereof are the sole responsibility of the Dealer.

2. SIGNS - BACKGROUND PREPARATION
The Contract is strictly limited to the following:
a) the installation of the signs;
b) the provision of any flashband required between the sign and the background;
c) all accidental and avoidable damage caused in the course of the installation except as stated in paragraph 1 above. Subject to the above, unless otherwise agreed in writing, all backgrounds, including their weather-proofing and all making good are the responsibility of the Dealer. In particular, they must provide a sound and suitable background onto which signs can securely be installed.

3. PETROLEUM REGULATIONS
The Dealer will ensure that the installation of illuminated signage does not contravene any Petroleum Regulations.

4. DAMAGE TO CONCEALED SERVICES
Neither the Contractor nor its agents will be responsible for repair or replacement of any cables, pipes or services damaged by the Contractor or its agents whilst carrying out the installation, unless prior to commencement of work the Contractor is supplied with drawings accurately identifying the location of all cables, pipes and services, unless prior to commencement of work the Contractor is supplied with drawings accurately identifying the location of all cables, pipes and services.

5. OBSTRUCTIONS
All possible and potential obstructions should be removed from installation area and unimpeded access must be assured for the Contractor at all times.

6. SITE BOUNDARIES
The Dealer is responsible to ensure that the installation is located within its own boundaries and will be made liable for any costs or expenses arising from any trespass or nuisance caused by the installation as identified in the Tender.

7. ALL HARD-SURFACED AREAS
Unless otherwise agreed in writing, all excavations of hard-surfaced areas will be made good by the Contractor only in concrete or stone chipping.

8. LOCATION OF SIGNS
The Contractor accepts no responsibility whatsoever for the suitability of location and positioning of installations which will have been decided in full consultation with the Dealer or shown on the Contractor's Scheme Drawings.