FLOOD RISK ASSESSMENT
FOR RESIDENTIAL DEVELOPMENT AT
RIVER BANK, SPALDING

FINAL REPORT

ECL0817/STATUS DESIGN

DATE JULY 2022

ELLINGHAM CONSULTING LTD
Email: tim@ellinghamconsulting.co.uk

CONTENTS

1.0 INTRODUCTION

2.0 SITE LOCATION AND DESCRIPTION
- 2.1 Site Location
- 2.2 Existing Site
- 2.3 Proposed Development
- 2.4 Local Development Documents
- 2.5 Available Flood Risk Information

3.0 FLOOD RISK VULNERABILITY
- 3.1 The Sequential and Exception Test
- 3.2 Vulnerability Classification
- 3.3 Application of the Sequential and Exception Test

4.0 SITE SPECIFIC FLOOD RISK
- 4.1 Local Flood Assets
- 4.2 Sources of Flooding
- 4.3 Probability of Flooding
- 4.4 Historic Flooding
- 4.5 Climate Change
- 4.6 Residual Risk

5.0 FLOOD RISK MITIGATION
- 5.1 Summary of Risks
- 5.2 Mitigation Measures

6.0 CONCLUSIONS

ATTACHMENT 1 – Site Plan (Dwg SD22-010/2)

DISCLAIMER
This document has been prepared solely as a Flood Risk Assessment in support of a planning application for proposed residential development at River Bank, Spalding. "Ellingham Consulting Ltd" accepts no responsibility or liability whatsoever for any use made of this document other than by the client Status Design for the purposes it was originally commissioned and prepared. All comments and opinions made are based upon information available to "Ellingham Consulting Ltd" during the necessary investigative process, and the conclusions and recommendations, could therefore, differ in the event of material subsequently being found erroneous, incomplete, or misleading. "Ellingham Consulting Ltd" therefore, accepts no liability should this prove to be the case.

1.0 INTRODUCTION

This Flood Risk Assessment has been prepared in accordance with National Planning Policy Framework (NPPF) and supporting planning practice guidance (PPG) on Flood Risk and Coastal Change.

In areas at risk of flooding or for sites of 1 hectare or more, developers are required to undertake a site-specific Flood Risk Assessment to accompany an application for planning permission. This Flood Risk Assessment has been produced on behalf of Status Design in respect of a development that consists of two residential dwellings at River Bank, Spalding.

A planning application for the proposed development is to be submitted by Status Design.

2.0 SITE LOCATION AND DESCRIPTION

2.1 Site Location

The site is located on land opposite 9 River Bank, Spalding, Lincolnshire, PE11 3AA. The National Grid Reference of the site is 52419/32113.

The location of the site is shown in Figure 1.



Figure 1 – Location Plan (© OpenStreetMap contributors)

2.2 Existing Site

The site is on the eastern side of River Bank. The site is an undeveloped plot of land, part of which is used for car parking. The River Welland forms the eastern boundary of the site. The area of development is approximately 0.05 hectares.

Environment Agency LiDAR data shows that the ground is flat with levels typically between +5.2m OD and +5.3m OD. The carriageway level of River Bank alongside the site is +5.1m OD

The site is in the Welland and Deepings Internal Drainage Board (IDB) District. The site and the surrounding land are within the Urban Spalding catchment and the nearest IDB watercourse is 100m north west of the site.

The online British Geological Survey maps indicate that the site is likely to be underlain by Oxford Clay Formation mudstone. The bedrock is shown to be overlain with superficial deposits of clay and silt.

2.3 Proposed Development

The proposed development consists of two residential dwellings. The dwellings will be single storey. A Site Plan is provided in Attachment 1.

2.4 Local Development Documents

The South East Lincolnshire Local Plan 2011 – 2036, adopted in March 2019, is the Local Plan for the district. Policy 4: Approach to Flood Risk states the requirements for flood risk reduction.

The South East Lincolnshire Level 1 and Level 2 Strategic Flood Risk Assessment (SFRA) was prepared in June 2017.

The Joint Lincolnshire Flood Risk and Drainage Management Strategy has been prepared by Lincolnshire County Council as the Lead Local Flood Authority. The purpose of the Strategy is to increase the safety of people across Lincolnshire by reducing the number of people at risk of flooding, increasing the resilience of local communities and reducing the impact of flooding

2.5 Available Flood Risk Information

An extract from the Environment Agency Flood Map for Planning is shown in Figure 2. The site is located within Flood Zone 3, an area with a high probability of flooding.

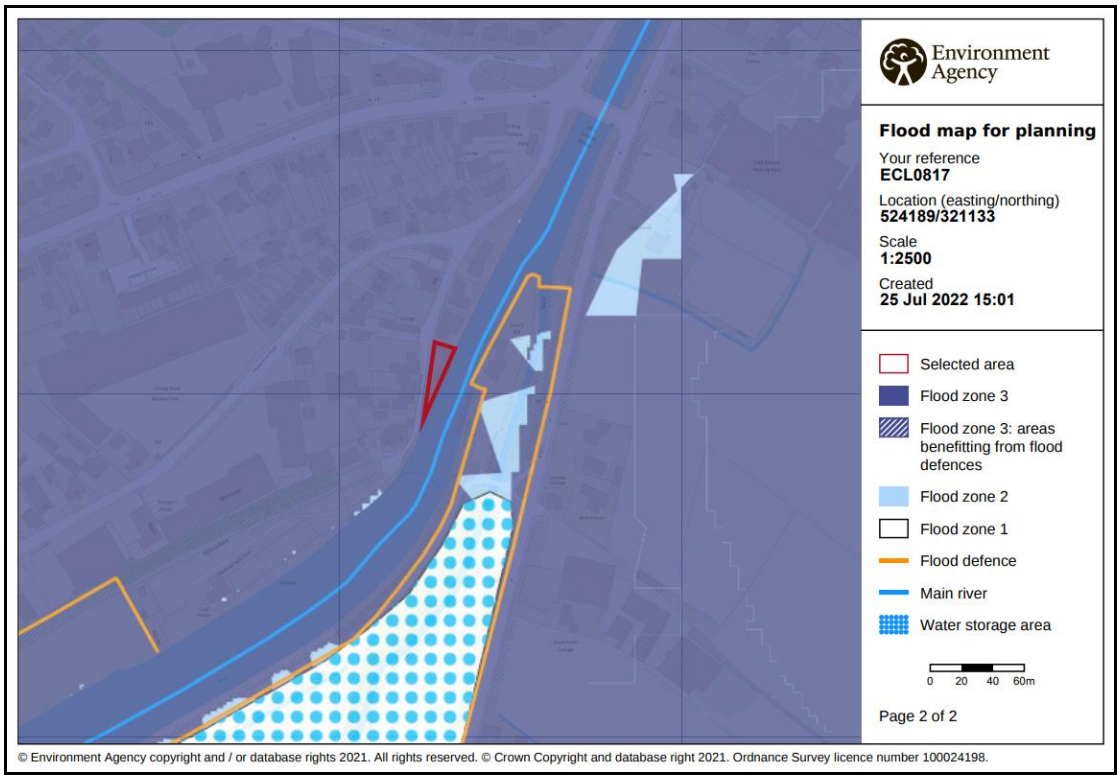


Figure 2 – Environment Agency Flood Map for Planning

The Environment Agency Long Term Flood Risk maps show that:

- the site has a very low risk of flooding (annual probability less than 0.1%);
- the site has a very low risk of surface water flooding (annual probability less than 0.1%); and
- the site is not within an area at risk of reservoir flooding.

Table 1 shows the level of risk at the site within the South East Lincolnshire SFRA.

SFRA Map	Present Day	2116
Residual Flood Hazard Map for the 1% fluvial and 0.5% tidal event	The site is outside of the 'Low Hazard' area	The site is outside of the 'Low Hazard' area
Residual Peak Depth Map for the 1% fluvial and 0.5% tidal event	The site is outside of the area at risk of flooding	The site is outside of the area at risk of flooding

Table 1 – Flood Risk within SFRA Maps

3.0 FLOOD RISK VULNERABILITY

3.1 The Sequential and Exception Test

The NPPF requires the application of a Sequential Test to ensure that new development is in areas with the lowest probability of flooding.

The Exception Test is a method to demonstrate and help ensure that flood risk to people and property will be managed, while allowing necessary development to go ahead in situations where suitable sites at lower risk of flooding are not available.

3.2 Vulnerability Classification

Table 2 of the PPG Flood Risk and Coastal Change categorises different types of uses and development according to their vulnerability to flood risk. The proposed development is covered by the description of residential care homes and is classified as 'More Vulnerable'.

Table 3 of the PPG Flood Risk and Coastal Change sets out Flood Risk Vulnerability and flood zone 'compatibility'. The site is in Flood Zone 3 and the development is 'More Vulnerable' therefore it is necessary to complete the Exception Test.

PPG Flood Risk and Coastal Change defines that the lifetime of the development in terms of flood risk and coastal change is 100 years.

3.3 Application of the Sequential and Exception Test

It is for the Local Planning Authority, taking advice from the Environment Agency as appropriate, to consider the Sequential Test.

Large parts of the South Holland district close to the River Welland lie within Flood Zone 3. As such, opportunities to undertake the development at an alternative site with a lower flood risk are limited and there are no known sites available for development in the limited areas of lower flood risk. In this context it is noted that SE Lincolnshire Local Plan residential allocations are within flood risk areas due to the lack of availability of sites within areas of lower flood risk.

The SFRA states that as it is necessary to use the refined flood risk information (hazard and depth maps) to assist with the application of the Sequential Test. The refined flood risk information contained within the SFRA demonstrates the site is not at risk during the 1% fluvial or 0.5% tidal event. The site therefore has a low probability of flooding and is considered to pass the Sequential Test.

The Exception Test requires consideration of the wider sustainability benefits of a development and that the development would be safe and residual risks managed.

The Local Plan has a target of a net increase of at least 11,681 dwellings in South Holland over the 25-year local plan period. The Plan considers this new housing is

required to ensure the sustainability of the Local Plan area. The proposed development will contribute to this target.

Section 5 of this Flood Risk Assessment describes the flood mitigation measures and the management of the residual risks, demonstrating that this development will be safe and not increase flood risk elsewhere. The development is considered to pass the Exception Test.

4.0 SITE SPECIFIC FLOOD RISK

4.1 Local Flood Assets

The eastern boundary of the site is formed by the River Welland as it flows through Spalding. The site is 600m south west of the inlet to the Coronation Channel, a bypass channel of the River Welland. The embankments of the Coronation Channel were constructed in the 1950's to convey river flows around Spalding. The Coronation Channel together with the Crowland and Cowbit Washes, which are upstream of the site, offer flood reduction to Spalding and the surrounding district.

The River Welland tidal defences are downstream of the confluence of the Coronation Channel and River Welland, however, these defences provide benefit downstream of Spalding and not to the town. The Cowbit Washes, Coronation Channel and River Welland tidal defences are the responsibility of the Environment Agency.

There is a long-term strategy for the maintenance of the Environment Agency defences which is reviewed and updated periodically.

There is an extensive local drainage network managed by Welland and Deepings IDB. The site and the surrounding land are within the Urban Spalding catchment and drain in a westerly direction to Pode Hole Pumping Station. Pode Hole Pumping Station discharges to Vernatts Drain which flows into the River Welland at Surfleet.

During the operation and maintenance of its pumping stations, associated structures and channel systems, the IDB seeks to maintain a general standard capable of providing flood protection to its district. A routine maintenance programme is in place to ensure that the Boards assets are commensurate with the standard of protection that is sought.

Current maintenance standards of the Welland and Deepings Internal Drainage Board and the Environment Agency are generally good.

4.2 Sources of Flooding

The potential sources of flooding that have been identified during this assessment are:

- local blockages to the Welland and Deepings IDB main drain system;
- an event in the local drainage network that exceeds the standard of protection;
- failure of Pode Hole Pumping Station; and
- overtopping and / or breaching of the River Welland defences.

4.3 Probability of Flooding

The probability of flooding associated with blockages in the Welland and Deepings IDB drainage system is low due to the maintenance standards achieved and managed by the IDB.

Through the operation and maintenance of the pumping stations and the channel system the Board seek to maintain a general standard capable to providing flood protection to agricultural land and developed areas of 1 in 20 years and 1 in 100 years respectively. The risk associated with flood events that exceed the standard of protection provided is lowered due to the Welland and Deepings IDB main drains incorporating freeboard. This freeboard provides storage during the exceedance events.

The Coronation Channel and the Cowbit Washes protect the site from the River Welland. These flood relief measures provide protection during the 1% annual probability (1 in 100 chance each year) fluvial event.

4.4 Historic Flooding

During the preparation of this assessment, no evidence was discovered of the site being flooded. Previous historic rainfall events of 1968 and 1978, estimated to be greater than 1% annual probability (1 in 100 chance each year), caused no flooding to any residential properties.

4.5 Climate Change

Climate change is likely to impact the site through increased rainfall intensity and duration affecting the local drainage network and increased flood levels.

The River Welland defences have been designed to include an allowance for climate change.

In summary the existing systems and defences are appropriate for the design life of the development (i.e., 100 years).

4.6 Residual Risk

There is a residual risk of flooding in and around Spalding site should a breach occur in the defences. The South East Lincolnshire SFRA includes maps demonstrating the impact of a breach in 2116. The proposed development includes single storey dwellings and therefore the finished floor level within these dwellings needs to consider the 0.1% annual probability (1 in 1000 chance each year) event in 2115. The Residual Peak Depth maps within the SFRA show that the site is not at risk.

5.0 FLOOD RISK MITIGATION

5.1 Summary of Risks

The probability of this development flooding from localised drainage systems is low. Failure of Pode Hole Pumping Station could lead to an increased level of risk at the site.

The site benefits from any Environment Agency defences that provide protection during the 1% annual probability (1 in 100 chance each year) fluvial event and 0.5% annual probability (1 in 200 chance each year) tidal event. Over time there will be a gradual increase in risk to the site due to climate change. During the design life of the development, it is not anticipated that the site would flood.

The SFRA considers the residual risk associated with a breach in the defences. The maps show that the site is not at risk.

The proposed arrangement increases the impermeable area and therefore there will be an increased volume of surface water that has the potential to increase flood risk.

5.2 Mitigation Measures

Based upon the information available during the preparation of this flood risk assessment, to mitigate against the risk of flooding it is recommended that the floor level of each dwelling is 0.3m above ground level with 0.3m of flood resilient construction above finished floor level.

The developer should ensure that the eventual occupiers of the dwellings are sufficiently aware of the risk of flooding, and the standard of the existing defences. The Environment Agency operates a flood warning system for properties at risk of flooding to enable householders to protect life or take actions to manage the effect of flooding on property. Floodline Warnings Service is a national system run by the Environment Agency for broadcasting flooding warnings. The occupier of the dwellings should register to receive flood warnings.

Should there be a failure of Pode Hole Pumping Station and conditions were such to put properties and land at risk of flooding, the Internal Drainage Board would take emergency action to maintain the drainage level of service by utilising temporary pumping equipment.

It is recommended that surface water run-off is managed so that stormwater from the development will not affect any adjoining properties or increase the flood risk elsewhere.

6.0 CONCLUSIONS

As a result of the assessment, the following conclusions have been reached.

- The proposed development consists of two single storey residential dwellings at River Side, Spalding.

- The site is located within an Internal Drainage Board catchment and through the operation and maintenance of the pumping stations and the channel system the Board seek to maintain a general standard capable to providing flood protection to agricultural land and developed areas of 1 in 20 and 1 in 100 years respectively.


- The proposed development is in Flood Zone 3. The site benefits from defences on the River Welland that provide protection during the 1% annual probability (1 in 100 chance each year) fluvial event and 0.5% annual probability (1 in 200 chance each year) tidal event including climate change.

- It is recommended that the floor level is 0.3m above ground level with 0.3m of flood resilient construction above finished floor level.

- The development passes the Sequential Test and Exception Test and is therefore suitable for the proposed location.

ATTACHMENT 1

SITE PLAN
(Dwg SD22-010/2)

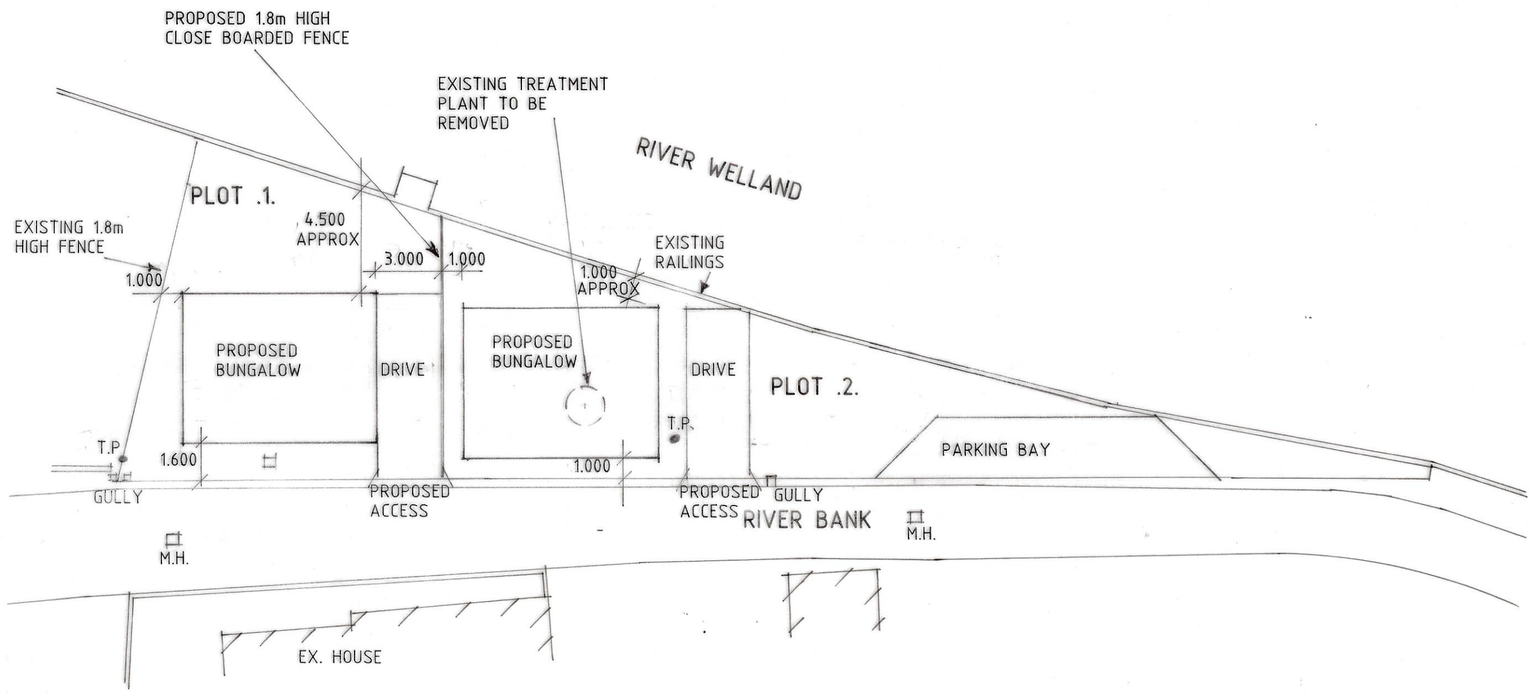

SITE PLAN

THIS DRG. TO BE READ IN CONJUNCTION WITH SD22-010/1

General Notes

Do not scale from this drawing.

This drawing is copyright and may not be altered, traced, copied, photographed or used for any purpose other than that for which it is issued without written permission from Measrs Status Design.

The General Contractor is to check all dimensions on site and report discrepancies to the Architect.

All details shown on this drawing are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions unless reported to the Architects so that design amendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken.

Please note this drawing is not a conveyance drawing.

Proposed on-site soakaways to be maintained by the owner for the life duration of the property.

This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Planning and Building Regulations approvals. This drawing must not be used as a contract document alone. The works will not be supervised or inspected by Status Design unless specifically contracted to do so. It is the client or their agent's responsibility to control workmanship, substitution of materials, adherence to specification, variations to contract etc.

All materials to be new unless stated otherwise and all components and materials, etc. to be used, fitted and installed, etc. in strict accordance with manufacturers' instructions and relevant Code of Practice. Materials should conform to appropriate British Standard specification or BBA Certificate or European Code equivalent.

The Employer/Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health and Safety Legislation for Building Sites and Work Places. The Employer/Client is advised that should the works need to comply with the Construction Design and Management Regulations 2015 (CDM) and Health and Safety at Work...etc. Act 1974 (HSW Act) an independent Planning Supervisor will be required whom should be supplied with a set of all relevant drawings, etc.

The works shall comprise of all that shown on the drawings and information etc. Works that may not specifically be shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included.

These notes relate to this drawing and all associated drawings.

It is the property/landowner's responsibility to be aware of the Party Wall...etc. Act 1996 when building or carrying out alterations in close proximity to adjoining neighbour's boundaries.

This proposal is for '2' bungalows – refer to drawing SD22-10/1. —

External Materials:
Planum clay interlocking low pitch roof tile – slate grey.
Butterley clockhouse knightsbridge multi stock facing bricks.

Provide new access and parking bay as shown all to LCC highways requirements.

Drive and parking bay to be of block paved surfacing or similar approved.

Surface water drainage to be to onsite soakaways.

Floor levels of proposed bungalows to be 450mm above ground level all as per flood risk assessment.

CONNECT FOUL DRAINS TO PUBLIC FOUL SEWER

B – ALTS – 20.6.22
A – INF. ADDED – 24.5.22

Status DESIGN
CONSULTANTS IN ARCHITECTURE & PLANNING

PROPOSED 2No BUNGALOWS
AT RIVER BANK, SPALDING
FOR

DR. K. A. WEIJERS.

SITE PLAN

1:200	SD22-010/2
APRIL-22	B.GILHAM.

2 Edinburgh Walk, Holbeach,
Spalding, Lincs. PE12 7AP
Tel: 01406 424303 Fax: 01406 490702