



D.M Wilson Builders
37, CLOUGH ROAD GOSBERTON RISEGATE,
SPALDING Lincs PE11 4JW
Tel: 07870 191 117



SOUTH HOLLAND DISTRICT COUNCIL LISTED BUILDING FOR
AYSCOUGH FEE HALL SCHOOL, WELLAND HALL, LONDON ROAD,
SPALDING

Reference no H16-0925-07

My apologies for these conditions being so late but I tried to send them by e-mail but they kept being sent back to me

Dear Chris

Below are a list of conditions that we went through last Friday at the meeting at ayscoughfee hope these are all ok and meet all the conditions that the council need if not please let me no and I will amend them.

Condition no

2 The infill bricks for the core of the wall are a red multi handmade brick by brick suppliers "all about bricks"

2 As we discussed with the copings that we would remove these at a later date and it seemed likely that most of them could be reinstated. If it was the case that 2 or 3 courses were clearly loose on removing these copings then these bricks would be removed and re-laid, if however there seemed to be a quantity of courses that were loose then I would liaise with yourself to what the best outcome would be.

3 The photo's which were taken marking all areas to be re-built, re-pointed and bricks replaced (bricks to be replaced have been circled in red, areas to be re-pointed have been circled in blue) as and when ayscoughfee give the go ahead on this part of work if for some reason the wall has deteriorated then I will contact yourself to inform of the changes to the wall and the work to be under taken.

4 The new arch metal section to form the 3 sectional arch former will be constructed as original either in 3 equal sections or as a whole to be determined as the wall is taken down. The arch former joint will be pointed up to match the mortar colour of the brickwork below archway.

V.A.T Number 946 – 1383-11

8 The test panel has been constructed on site. As discussed the bricks we retrieve from the core of the wall will be given a bit more of a clean and if are clean will be reused as facing bricks in the wall (if for any reason I am not sure on reusing these then I will contact you once the wall has been taken down)

9 mortar types as per samples seen at ayscoughfee

The main wall the mortar mix consists of red sharp sand from bullimores quarries x 2 volumes and a castle natural hydrated lime NHL 3.5 x 1 volume

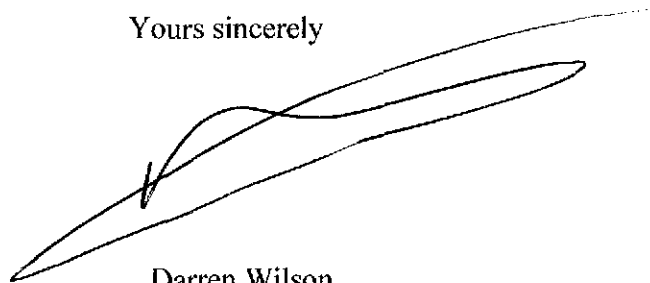
The section of wall below arch consists of a red sharp sand as above x1 volume with a orange Norfolk sand x1 volume supplied by bardo midlands with extra aggregated added out the sharp sand to give a courser aggregate content and natural hydrated lime by castle nhl 3.5 x 1 volume

I will keep a couple of tone of each sand in my yard for as and when the remainder of wall is completed.

Also discussed ply template of the arch will be made and the bricks will be removed and placed in the exact place to replicate the wall

If there are any problems or we are able to start on mondy would you please let me no by email (wilsondarren@hotmail.co.uk) or by phone 07870191117

Yours sincerely

A handwritten signature in black ink, appearing to read 'Darren Wilson', written over a horizontal line.

Darren Wilson

D.M.WILSON. BUILDERS LTD WON THE CATEGORY FOR BEST
CONSISTENT QUALITY AWARD BUILDER IN THE SOUTH HOLLAND
DISTRICT COUNCIL AND BUILDING CONTROL BUILT IN QUALITY AWARDS
2009/2010

VAT Number 946 – 1383-11