
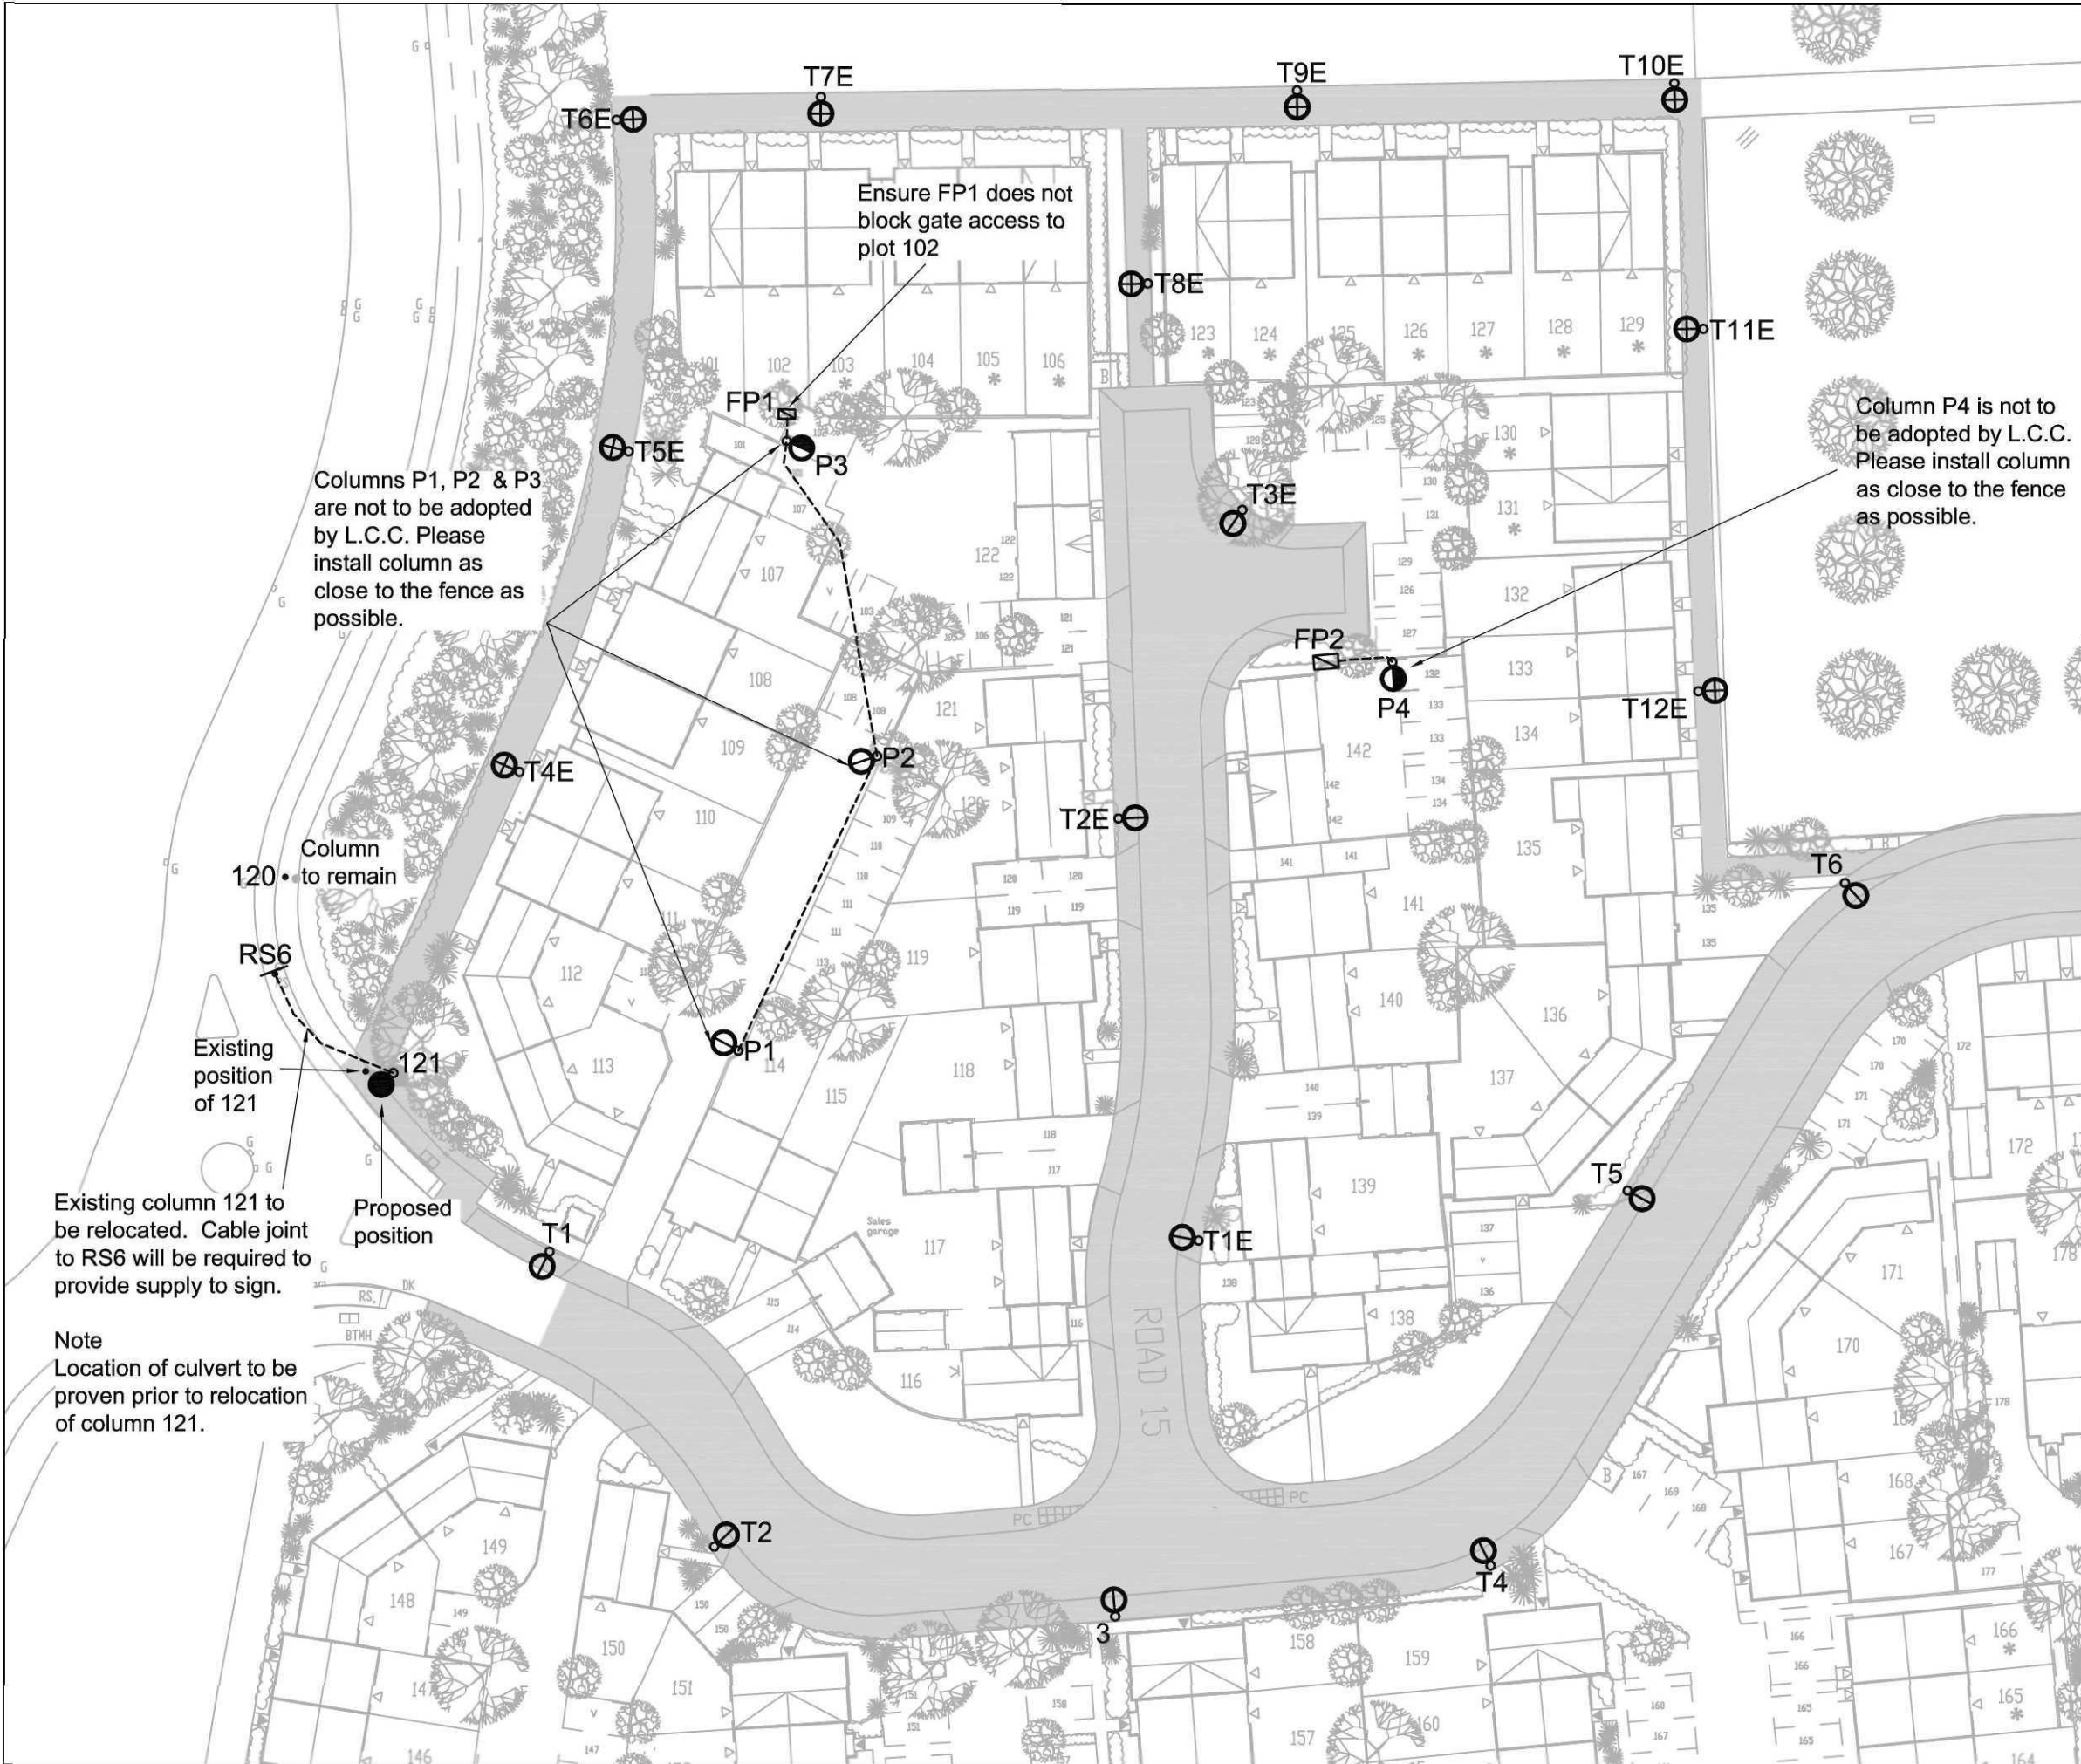


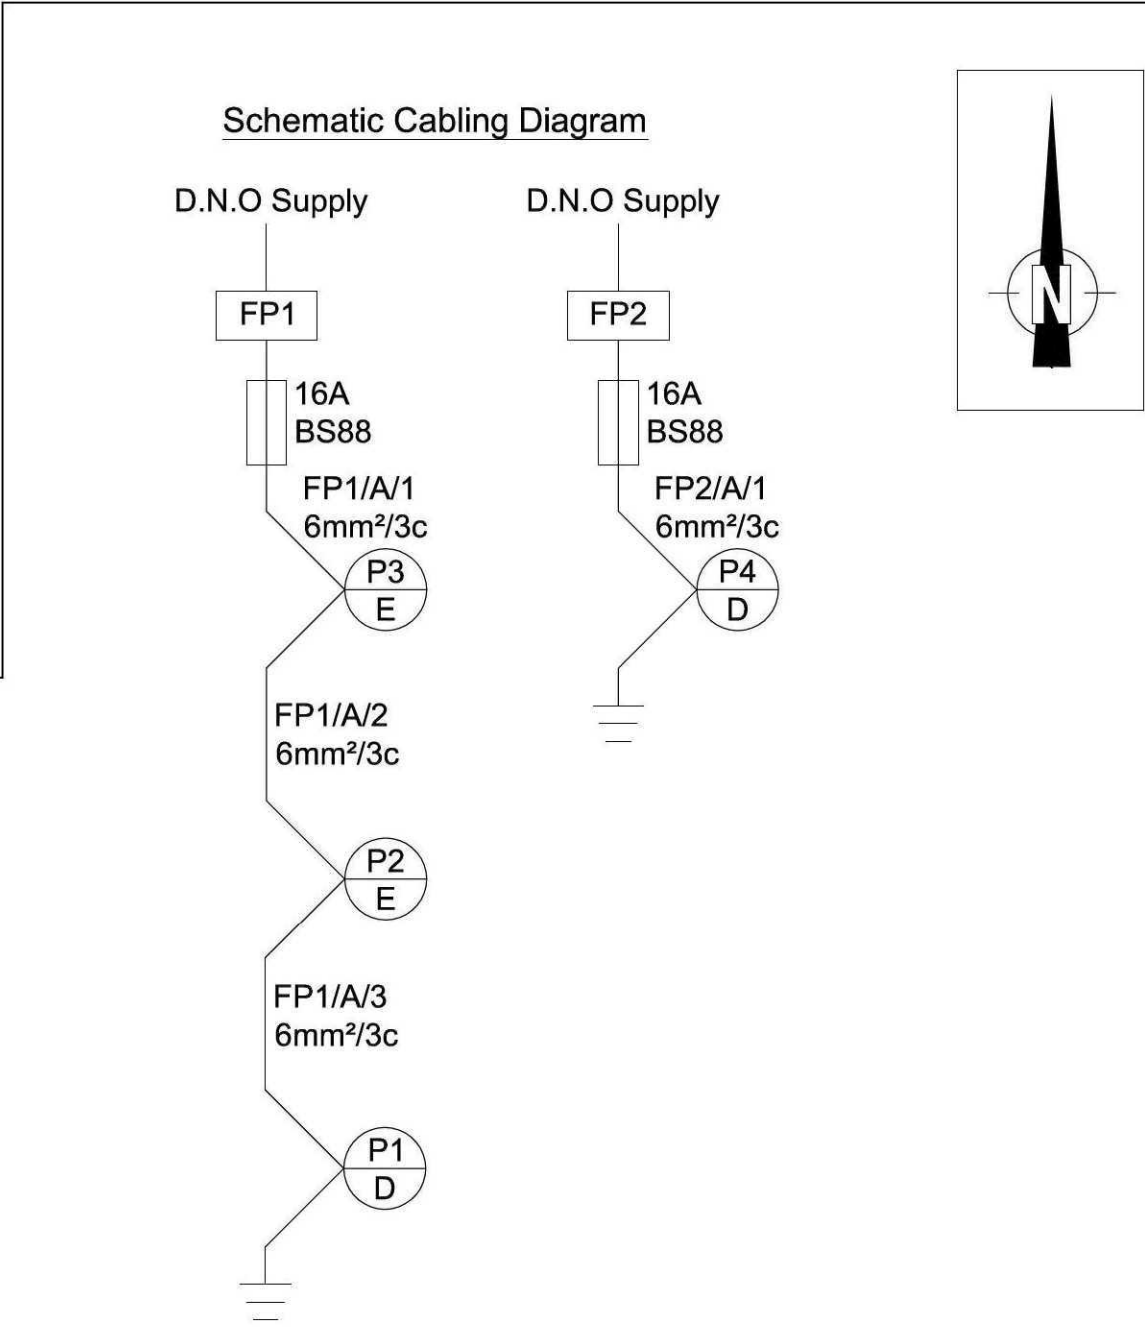

|    |                                                                                                                                                                                                                                                                              |     |                                                                                                                                                                                                          |
|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. | Column foundations to be as per TD7/14/2A.                                                                                                                                                                                                                                   | 15. | Cable runs are indicative only and may vary on site.                                                                                                                                                     |
| 2. | All columns part of the adoption process are to be provided with electricity company services and Termination Type 'A' to L.C.C. typical detail TD7/14/4A. Rec cutouts to be fitted with 16 amp BS88 fuse link. Double pole isolator to be fitted with 4 amp BS88 fuse link. | 16. | Private lights to be fed from private feeder pillars shall be installed as per schematic cabling diagram.                                                                                                |
| 3. | All columns to be sited within the adoptable highway and generally in compliance with Appendix H of the current Lincolnshire design guide for residential areas.                                                                                                             | 17. | It is recommended that private columns are to be provided with L.C.C. Termination Types D and E to L.C.C. TD7/14/4D & TD7/14/4E respectively (to be installed as detailed in schematic cabling diagram). |
| 4. | Column setbacks shall comply with section 5.2.1.2 of BS5489-1:2003.                                                                                                                                                                                                          |     |                                                                                                                                                                                                          |
| 5. | Columns shall not be installed within drop kerb areas and shall have a minimum clearance of 1.5m from drives/accesses.                                                                                                                                                       |     |                                                                                                                                                                                                          |
| 6. | It is preferred that all street lighting works are undertaken by L.C.C. approved contractors.                                                                                                                                                                                |     |                                                                                                                                                                                                          |
| 7. | Lanterns to be re-lamped (during maintenance period) prior to adoption as detailed in the section 38 agreement.                                                                                                                                                              |     |                                                                                                                                                                                                          |
|    | 8. Developer to liaise with electricity company with regards to connections and disconnections of columns and appropriate black ducting.                                                                                                                                     |     |                                                                                                                                                                                                          |
|    | 9. Lanterns prefixed 'T' shall be part night switched miniature 35 LUX.                                                                                                                                                                                                      |     |                                                                                                                                                                                                          |
|    | 10. Lanterns prefixed 'P' shall be private lights and are not part of the L.C.C. adoption process. Private lights shall be fed from private feeder pillars, also not part of the adoption process.                                                                           |     |                                                                                                                                                                                                          |
|    | 11. Energy costs to be borne by the developer prior to adoption.                                                                                                                                                                                                             |     |                                                                                                                                                                                                          |
|    | 12. The developer is made aware of the several SHW appendices related to street lighting.                                                                                                                                                                                    |     |                                                                                                                                                                                                          |
|    | 13. Due to the nature of the submitted plan some column positions are provisional and may be subject to alteration. A spacing tolerance of $\pm$ metre may be permissible on site to avoid windows and drives etc. Not necessarily clear at date of plan.                    |     |                                                                                                                                                                                                          |
|    | 14. Developer shall ensure locations of proposed trees do not inhibit lighting levels and lighting column positions. Consult with landscaping plan.                                                                                                                          |     |                                                                                                                                                                                                          |

Lincolnshire Highway Alliance drawing created using base information supplied by external party detailed below:

Base Information Provided By: Wormald, Burrows Partnership

Client Provided Drawing Number: E1081/111/D

|                          |                                                                                     |           |         |              |                |
|--------------------------|-------------------------------------------------------------------------------------|-----------|---------|--------------|----------------|
| A4                       | New Contractors Base                                                                | JR        | DS      | PC           | 21/04/19       |
| A3                       | ADDITION OF COLUMN 121 RELOCATION                                                   | NP        | MRG     | SH           | 26/1/15        |
| A2                       | Feeder Pillar FP1 relocated<br>Minor amendments to notes                            | NP        | MRG     | PC           | 13/1/11        |
| A1                       | Addition of private network supplies<br>Amendments to notes / Cabling diagram added | NP        | MRG     | PC           | 12/1/11        |
| Revision:                | Description:                                                                        | Drawn By: | CAD By: | Approved By: | Approval Date: |
| <b>Amendment Details</b> |                                                                                     |           |         |              |                |

**Lincolnshire**  
COUNTY COUNCIL

**Highways Alliance**

TECHNICAL SERVICES PARTNERSHIP  
WITHAM PARK HOUSE,  
WITHAM PARK,  
WATERSIDE SOUTH  
LINCOLN LN3 7JH  
Customer Service Centre : (01522) 782070

Technical Services Partnership

**PROPOSED WORKS**

LINCOLNSHIRE COUNTY COUNCIL - Reproduced from Ordnance Survey material with the permission of Ordnance Survey on behalf of the Controller of Her Majesty's Stationery Office  
© Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. OS Licence 100025370

Inset 1  
(Scale 1:500)