



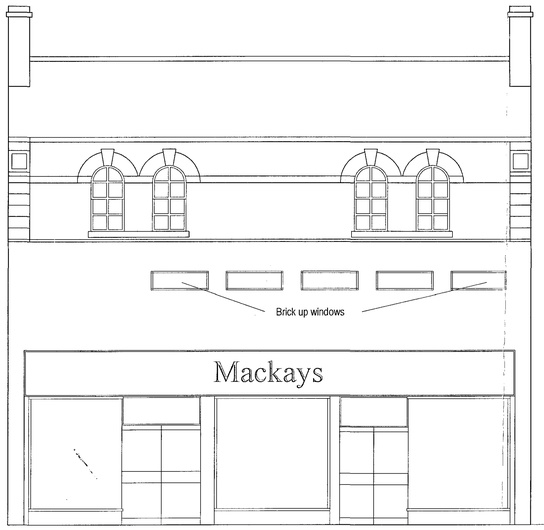


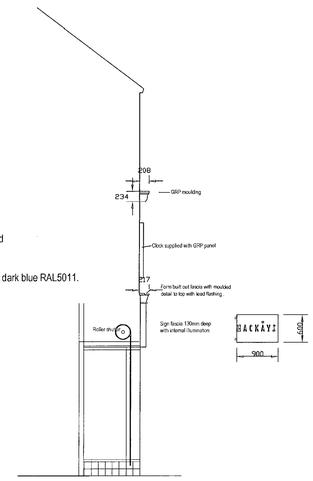

SECTION THROUGH CENTER


SHOPFRONT AS EXISTING

SHOPFRONT AS PROPOSED

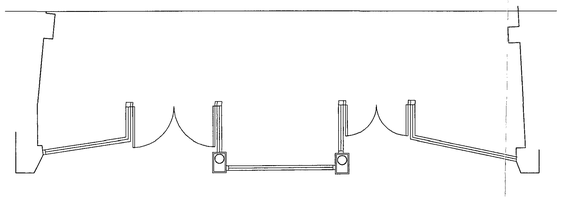


SHOPFRONT PLAN AS EXISTING

NEW CENTRAL ENTRANCE

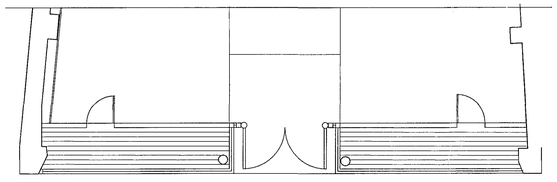

SHOPFRONT PLAN AS PROPOSED

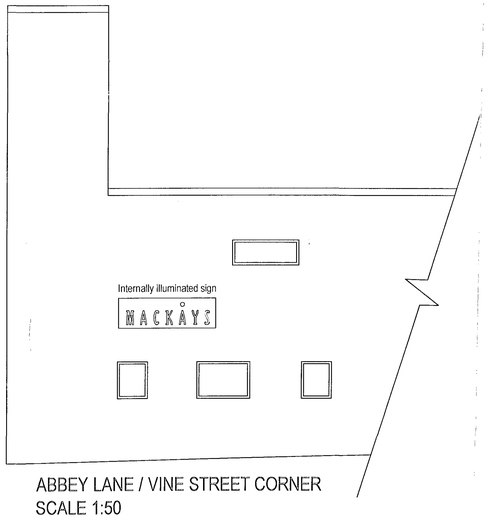

ABBEY LANE / VINE STREET CORNER
SCALE 1:50

REVISED 10/09/04

SCALE 1:500

SCALE 1:1250

FASCIA

Frame out and form new fascia ground with treated SW timber faced 22mm Marine grade plywood.
Fascia to be cut out to take signage internal lighting.

FASCIA SIGN FLANKING PANELS

Panels to be formed from powder coated aluminium sheet with folded edges and butt joints. Panels to be fixed at intervals to make up blank areas either side of sign panel.

Panel finish : Dark blue (RAL 5011) gloss.

FASCIA SIGNS

Sign panels formed as flanking panels, internally illuminated with fluorescent lamps. Letters to be fret cut planted onto the front of the fascia .

PROJECTING SIGN

Formed as fascia and fret cut with white acrylic letters. Illuminated internally, letters both sides.
Finish : Dark blue (RAL5011) gloss.
Size : 900x600x125

STALLRISER

Frame out and form new stallriser with treated SW timber and DPM with 20mm ext.grade ply lined internally with 75mm insulation quilt, clad with 150x150 ceramic tiling to underside of new al. glazing section.

REF.: Wolliscroft BM2 Quarry tiles 150x150 unglazed plain.

Colour : Charcoal

ENTRANCE FLOOR

Supply & fix anti-slip ceramic floor tile
REF.: Wolliscroft BM2 Quarry tile 150x150mm anti-slip studded.
Colour : Grey

DOORS

Manufacture & install frameless aluminium entrance doors with 100x100 aluminium door posts. Doors and posts to be powder coated, finished White, 60% gloss.

Doors to have sprung pivotal hinges checking at 0° & 180°.
Supply & install 300mm SS 'D' handle sets.
Glazing to doors to be 10.8mm laminated throughout.
Doors to be supplied with anti-fingertrap guards at door post edges.

NEW SHOPFRONT

Shopfront to be manufactured and installed using 100x45 standard aluminium glazing sections, powder coated, finish colour White, 60% gloss.

Glazing to be 10.8mm laminated.

PILASTERS

No changes to pilasters.

RAINWATER GOODS

Guttering, downpipes etc to receive 1no. coat primer and 1no. coat gloss to match existing.

ROLLER SHUTTERS

Supply and fit electrically operated roller shutter doors to entrance .Each shutter to have external and external keyswitch operation. Location to be agreed with Mackays supervising officer.
Manual overide operation to be provided .
Location of access winding handle to be agreed by Mackays supervisor.
Shutter lathe to be perforated with powder coating to match glazing section finish .

GRP DETAILS

Fix GRP moulded architectural details to full elevation cornice
Fix heritage style clock , colour dark blue RAL 5011.
Fix GRP detail to corners to match existing .

DECORATION

Frontage to receive full redecoration in masonry paint .
Details to be picked out in different colours .
Colours to be finalised with Planning authority .

CLOCK

Traditional style clock in contrasting colour to frontage .

MACKAYS
MACKAYS STORES LIMITED
CALEDONIA HOUSE, CALEDONIA STREET,
PAISLEY PA3 2JP
0141 887 9151 FAX 0141 314 7279

APPROVED
IWM
CW

A1

Planning & Development
17 SEP 2004
For Approval

PROJECT
SPALDING

TITLE
EXISTING / PROPOSED
SHOPFRONT / NEW SIGNAGE

DETAILED PLAN

DWG.NO SPALDING/137/04/03
DRAWN BY GM
CHECKED BY
APPROVED BY
SCALE 1:50
DATE 26/05/04
DATE
DATE