RevNo	Revision note	Date	Signature	Checked

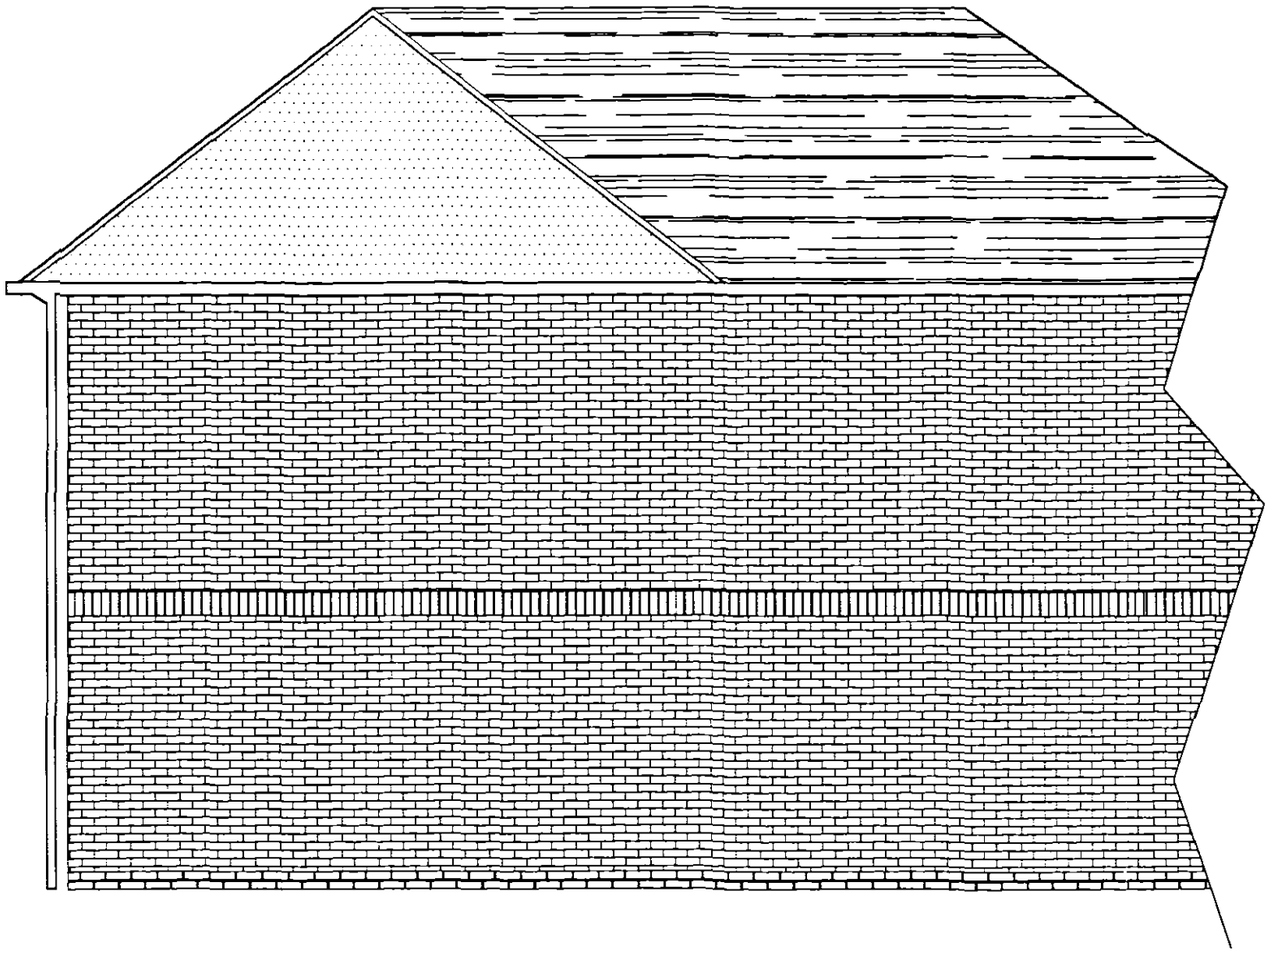

NOTES

ALL DIMENSIONS TO BE CHECKED ON SITE

600mm HIGH DWARF WALL, FROM TOP OF DAMP COURSE. BRICKS ARE TO MATCH EXISTING.

UPVC FRAMED WINDOW UNITS COMPRISING OF FIXED LIGHTS AT THE BOTTOM, WITH TOP HUNG OPEN OUT VENTS ABOVE. COLOUR TO BE WOOD GRAIN EFFECT.

ROOF CONSTRUCTION TO BE OF UPVC RAFTERS WITH ALUMINIUM STRRENGTHENING INSERTS. ROOF PANELS ARE TO BE 16mm BRONZED POLYCARBONATE INSERTS.

FIXED LIGHT GLAZING TO BE 28mm COMPRISING:
4mm PILKINGTON TOUGHENED SAFETY GLASS INNER
20mm AIR FILLED GOLD SPACER
4mm PILKINGTON TOUGHENED SAFETY GLASS OUTER

DOOR GLAZING TO BE 28mm COMPRISING:
4mm PILKINGTON TOUGHENED SAFETY GLASS INNER
20mm AIR FILLED GOLD SPACER
4mm PILKINGTON TOUGHENED SAFETY GLASS OUTER

OPENING LIGHT GLAZING TO BE 28mm COMPRISING:
4mm PILKINGTON ANNEALED FLOAT INNER
20mm AIR FILLED GOLD SPACER
4mm PILKINGTON ANNEALED FLOAT INNER
OPENING VENTS ALSO TO HAVE LEAD EFFECT DECOR.

SHDC
Planning & Development
19 JUN 2003
Ref 0790/03

OUTSIDE DEPTH TO BE 4499mm
OUTSIDE WIDTH TO BE 8500mm
INTERNAL VOLUME: 70.23 cu.m
INTERNAL FLOOR AREA 25.22 sq.m
FRAME HEIGHT 2100mm
MAX HEIGHT FROM INTERNAL FFL TO CONSERVATORY RIDGE 3252mm INCLUDING DECORATIVE CAPPING.

LEFT SIDE ELEVATION

PROPOSED CONSERVATORY
4 CLAUDETTE WAY
SPALDING
LINCS
PE11 1AJ

DETERMINED
PLAN

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by N Fairbanks		Checked by	Approved by - date	File name J Ward	Date 01/05/03	Scale 1:50
PLATINUM DESIGN		LEFT SIDE ELEVATION				
		003			Edition 0	Sheet 1/1