


South



Drp No 95/04/01 Rev

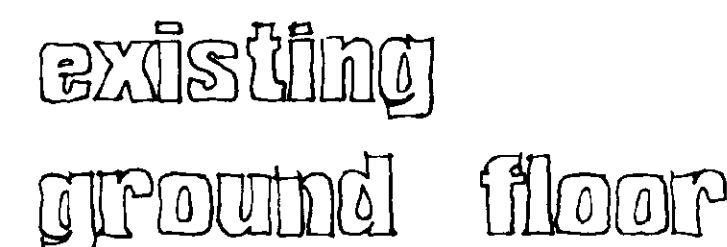

Glazing to windows less than 800mm and doors (incl. side panels to doors) less than 1500mm above floor level is to be laminated or toughened glass in accord with BS6206 :1981

All habitable rooms are to have windows containing ventilation openings the combined total of which is equal to not less than 1/20th of the floor area of the room.

Windows to habitable rooms are to incorporate a controllable trickle vent of 8000sq mm. and 4000sq mm to non habitable rooms.

The kitchen is to be mechanically ventilated direct to the external air. The capacity of the extractor is to be 60 litres/sec or 30 litres/sec if in a cooker hood.