

Front Elevation-Bentleys



EXISTING




PROPOSED-New astragal
bar arrangement-
Aluminium



Front Elevation-Restaurant

PROPOSED-Sliding sash imitation. Top hinged opener-Timber




- Spiral Balance Sash Window (S2-174-59)**
- Timber Frame: Engineered Softwood (FSC Certified)
 - Timber Cill: Grandis Hardwood (FSC Certified)
 - Timber Sash: Engineered Softwood (FSC Certified)
 - CE/ WBG: No / No
 - Sash Bar: 21mm Standard Astragal + IB
 - Finish: **RAL 7038**
 - Gasket:
 - Glazing: 2 No. 4.0mm Float / 20 Arg / 4.0mm Float-1.2 with a Black Warmedge Spacer

Front Elevation-Restaurant- Dormer



**PROPOSED-2 no dormers
to replace- Replace like
for like-Timber**

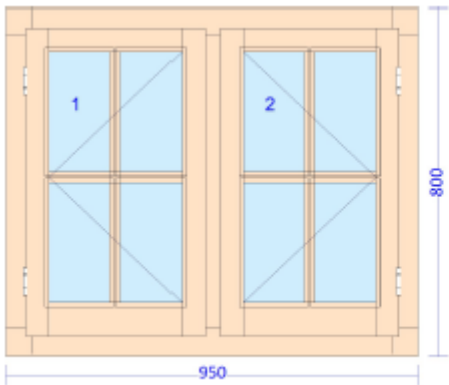


- Historic Flush Casement Window (C2-81-44)**
- | | |
|----------------|---|
| Timber : | Engineered Softwood (FSC Certified) |
| Frame Profile: | Historic Standard |
| Sash Profile: | Historic Lambs Tongue (18mm) |
| CE/WBG: | Yes / No |
| Frame Drips: | No |
| Sash Bar: | Solid Bar |
| Finish: | RAL 7038 |
| Gasket: | |
| Glazing: | 8 No. 4.0mm Float / 6 Arg / 4.0mm Float-1.0 with a Bronze Historic Aluminium Spacer |



Front Elevation-Restaurant



PROPOSED-Sliding sash imitation. Top hinged opener
-Dormer replace like for like-Timber

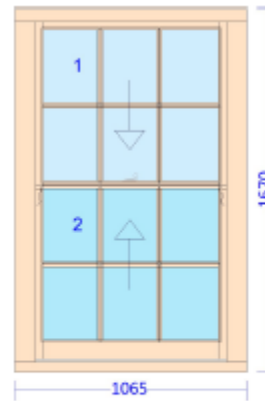

Box Sash Window (S1-144-44)

Timber Frame: Engineered Softwood (FSC Certified)
Timber Cill: Grandis Hardwood (FSC Certified)
Timber Sash: Engineered Softwood (FSC Certified)
Timber Linings: Grandis (FSC Certified)
Frame Profile: Historic/Flush Linings
Sash Profile: Historic Lambs Tongue (18mm)
CE/ WBG: No / No
Sash Bar: Solid Bar

Finish: **RAL 7038**

Gasket:
Glazing: 6 No. 4.0mm Float / 6 Arg / 4.0mm Float-1.0 with a Bronze Historic Aluminium Spacer,
6 No. 4.0mm Tough / 6 Arg / 4.0mm Tough-1.0 with a Bronze Historic Aluminium Spacer

RAL 7038
AGATE GREY