

BS5837:2012 -Trees in relation to design, demolition and construction. Tree Constraints report in relation to trees at Spalding Football Club.

Prepared by: East Midlands Tree Surveys Ltd.

Date: 15/09/26

Limitations of use and copyright: All rights in this report are reserved. No part of it may be reproduced or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, or stored in any retrieval system of any nature, without our written permission. Its content and format are for the exclusive use of the addressee in dealing with this site. It may not be sold, lent, hired out or divulged to any third party not directly involved in this site without the written consent of East Midlands Tree Surveys.



Contents

1. Instructions	1
2. Information supplied	1
3. Introduction	1
4. Planning Policy Context	2
5. Site description	3
6. Tree survey findings	4
7. Constraints	4
8. Recommendations	4
Appendix 1. Tree survey data	5
Appendix 2. Tree constraints plan	7
Appendix 3. Tree survey	8
Appendix 4. Legal Constraints	10
Appendix 5. Arboricultural considerations in relation to development	11
Rooting structure	11
Typical rooting structure of a tree	12
How can trees be damaged?	12
Appendix 6. Biosecurity advice	13
Appendix 7. References	13



1. Instructions

This report was commissioned by Field and Fox Architects with instruction to carry out an inspection of trees at the above address, in line with *BS5837:2012 Trees in relation to design, demolition and construction - Recommendations*.

The objectives of this report are as follows:

- To make an assessment of the trees' condition and identify any faults.
- To provide recommendations in line with BS5837:2012.
- To provide Tree Constraints in line with BS5837:2012.

2. Information supplied

EMTS was supplied with the following document(s):

Title	Format	Provider
92114NOLS	DWG	FFA

Our plans are based on the above DWG file which was imported to our mapping software for revision.

3. Introduction

This document has been prepared to fulfil the requirements for the proposal in accordance with the Department for Communities and Local Government guidance on information requirements and validation and is set out in compliance with British Standard 5837 Trees in relation to design, demolition and construction recommendations 2012.

The initial tree survey is considered to be compliant with BS5837:2012.

All trees considered likely to be affected by the proposal were surveyed and the details are given in Appendix 1 Table.

A topographical survey was provided which showed the position of the trees on site. It should be noted however that topographical surveys are not always comprehensive and sometimes it is considered appropriate to record details of trees and landscape features omitted from or beyond the scope of the plan. If this circumstance occurs, the location of the individual tree or landscape feature is estimated.

The tree numbers referred to in this report are the same as shown on the tree survey schedule and plan.

Only those trees directly implicated by the proposed site have been assessed.

This report has been prepared to meet planning requirements and as such is not considered to be a condition survey, any obvious actionable defects will however be picked up as part of the assessment.



Due to potential changes in tree health, this report is valid for a period of 2 years from the above date.

It is generally agreed that the majority of tree roots, even for a mature tree, are found in the top 90cm of the soil and are vulnerable to sudden changes in the rooting environment. These roots absorb moisture and nutrients needed for growth and contrary to popular belief, mature trees do not have a large deep taproot that obtains moisture from great depth.

An ideal soil for root growth is about 50% pore space (in urban areas this is often significantly reduced). These pores, the spaces between soil particles, are filled with water and air. Construction activity compacts the soil and can dramatically reduce the amount of pore space. This not only inhibits root growth and penetration but also decreases oxygen in the soil that is essential to the growth and function of the roots.

Any damage to the rooting environment can upset the balance between the crown and roots established by a tree over many years, and this may be detrimental to the health status or may compromise the stability and structural integrity of the tree. It should be noted that healthy trees will usually withstand a loss of a proportion of their root system.

The two main possibilities for injury to trees during and following the construction process are from direct and indirect damage.

Direct damage can be defined as injury resulting from physical contact including contact with machinery or fire and excavation of the rooting area.

Indirect damage can be defined as injury from activities that take place near the tree such as level changes, compaction of the soil or contamination by chemical spillage in the proximity of the root plate.

Light tree surgery such as crown lifting and/or the provision of high-quality tree protection measures coupled with suitably supervised and implemented construction methods can reduce the risk of damage to retained trees.

The soil type was not assessed in detail and was referenced only through information obtained from the Soilsclapes website which indicates loamy, shallow lime-rich soils over chalk or limestone.

4. Planning Policy Context

National and Local Planning Policy

4.1 National Planning Policy Framework (NPPF) Aug 2026 reflects the Government's vision for a planning system that puts beautiful, environmentally sustainable, and life-enhancing places at its heart. The NPPF recognises that the natural environment is an essential component of the health and wellbeing of society, and in achieving well designed places.



N2: Improving the natural environment

d. Conserve and enhance existing natural features of visual, historic or nature conservation value (such as established trees and hedgerows) where possible; and use appropriate landscaping to help create a well-designed place and integrate the development into its surroundings;

N3: Trees in new development

1. In recognition of the benefits which trees can provide for biodiversity, climate change mitigation and adaptation, and the character and quality of the built environment, development proposals should:

a. Make new streets tree-lined (unless there are strong reasons why this would be inappropriate in specific streets), and incorporate trees in other suitable locations, such as in parks and through the provision of community orchards;

b. Ensure that the selection of species and their placement is compatible with highways and other infrastructure requirements and the needs of different users of public spaces; and will be effective in helping to adapt to the effects of climate change and delivering other environmental benefits. Suitable arboricultural advice should be sought, and proposals discussed with highways and trees officers where necessary, so that the right trees are planted in the right places; and

c. Make provision for the long-term maintenance of both existing and newly-planted trees which form part of the development.

N6: Areas of particular importance for biodiversity and geodiversity

2. Irrespective of a site's status in nature conservation terms, development proposals which would entail the loss or deterioration of irreplaceable habitats (such as ancient woodland and ancient or veteran trees) should be refused, unless there are wholly exceptional reasons and a suitable compensation strategy exists.

5. Site description

The site comprises the grounds of an established football club, including the playing area and associated boundary margins and facilities.

Existing Trees

The trees surveyed are predominantly located along the site boundaries, where they form established boundary vegetation and provide a degree of screening and amenity value. The majority of the trees are therefore positioned outside the main playing area.

A single Birch is located off-site but has been included within the assessment due to its proximity to the site and potential to influence the proposed development.



The surveyed trees are considered within this report in relation to their existing condition, amenity value and the potential constraints they may present to the proposed development, in accordance with BS5837:2012.

6. Tree survey findings

The tree details and associated site notes recorded at the time of inspection are provided in Appendix 1.

The trees overall are considered to be in reasonable physiological and structural condition, with no significant defects observed that would materially affect their retention potential.

The trees within G1, located alongside Kings Road, together with those along the south-eastern boundary, are assessed as providing a high level of public amenity. Their prominent location and contribution to the established boundary vegetation mean that they are readily visible to the public and make a significant contribution to the character and visual amenity of the surrounding area.

7. Constraints

The Tree Constraints Plan can be found at Appendix 2.

8. Recommendations

A site layout should be developed that positions all proposed construction entirely outside the Root Protection Areas (RPAs) of trees designated for retention and gives appropriate consideration to existing and future shade patterns. Where shade intrusion is unavoidable, lower-occupancy or non-habitable rooms (e.g., bedrooms, bathrooms, utility spaces) should be located within the predicted shade arcs, while primary habitable rooms and principal living spaces should remain outside these zones to preserve amenity value.

Forecasted future growth must be factored into the design. This consideration is critical to preventing future conflicts between trees and structures and avoiding consequential pressure for inappropriate pruning or removal.

Following development of a preliminary layout, an Arboricultural Impact Assessment (AIA) in accordance with BS 5837, together with a Tree Protection Plan (TPP) and an Arboricultural Method Statement (AMS), will be required to demonstrate how tree constraints have been integrated and how retained trees will be protected throughout the construction process.



John Wilcockson – Director, East Midlands Tree Surveys LTD.

Tech Cert (Arbor A), NDF For

15/09/26






Retention Category	No. trees	Rem. Contrib.	No. trees
B	11	40+ Years	11

Total	11
-------	----

Ref.	Species	Full Structure	Measurements	Survey Notes	Retention Category	RPA	Condition	Recommendations
G1	Mixed species (Mixed species)	Group	Height (m): 18 1 stems Spread (m): 7N, 7E, 7S, 7W Crown Clearance (m): 3 Life Stage: Mature Rem. Contrib.: 40+ Years	1 Horse Chestnut, 1 London Plane, 3 Lime and 1 Sycamore. Trunk - ivy/climber on Plane Crown - minor deadwood < 100mm One Lime is leaning. 2 Lines have epicormics. 400, 1000, 440, 440, 429, 470, 470.	B1,2	Area: 205 sq m.	Physiological Cond: Good Structural Cond: Good Public Visual Amenity value: High	Epicormic removal.
G2	Mixed species (Mixed species)	Group	Height (m): 17 Stem Diam(mm): 500 Spread (m): 5N, 5E, 5S, 5W Crown Clearance (m): 4 Life Stage: Early Mature Rem. Contrib.: 40+ Years	5 limes. Historically pollarded. Epicormics Codominant stems	B1,2	Area: 122 sq m.	Physiological Cond: Good Structural Cond: Good Public Visual Amenity value: High	No works
Nt1	Birch (Betula sp.)	Tree	Height (m): 18 Stem Diam(mm): 250 Spread (m): 6N, 6E, 6S, 6W Crown Clearance (m): 4 Rem. Contrib.: 40+ Years	No significant defects Crown - minor deadwood < 100mm	B1,2	Radius: 3.0m. Area: 28 sq m.	Physiological Cond: Fair Structural Cond: Fair Public Visual Amenity value: High	No works
Nt2	Lombardy poplar (Populus nigra italica)	Tree	Height (m): 25 Stem Diam(mm): 1000 Spread (m): 6N, 6E, 6S, 6W Crown Clearance (m): 5 Life Stage: Mature Rem. Contrib.: 40+ Years	Trunk - codominant stems at 5m Crown - minor deadwood < 100mm Trunk - epicormics/suckers	B1,2	Radius: 12.0m. Area: 452 sq m.	Physiological Cond: Fair Structural Cond: Fair Public Visual Amenity value: High	Epicormic removal.

Ref.	Species	Full Structure	Measurements	Survey Notes	Retention Category	RPA	Condition	Recommendations
Nt3	Lombardy poplar (<i>Populus nigra italica</i>)	Tree	Height (m): 25 Stem Diam(mm): 1000 Spread (m): 6N, 6E, 6S, 6W Crown Clearance (m): 5 Life Stage: Mature Rem. Contrib.: 40+ Years	Trunk - codominant stems at 5m Crown - minor deadwood < 100mm Trunk - epicormics/suckers	B1,2	Radius: 12.0m. Area: 452 sq m.	Physiological Cond: Fair Structural Cond: Fair Public Visual Amenity value: High	Epicormic removal.
Nt4	Lime (<i>Tilia sp.</i>)	Tree 4 stems	Height (m): 17 4 stems (mm): 200, 200, 250, 200 Spread (m): 6N, 6E, 6S, 6W Crown Clearance (m): 4 Life Stage: Mature Rem. Contrib.: 40+ Years	Trunk - codominant stems at 0.2m Crown - minor deadwood < 100mm Trunk - epicormics/suckers Offsite - unable to survey effectively due to access	B1,2	Radius: 5.1m. Area: 82 sq m.	Physiological Cond: Good Structural Cond: Good Public Visual Amenity value: High	Epicormic removal.
Nt4	Lombardy poplar (<i>Populus nigra italica</i>)	Tree	Height (m): 25 Stem Diam(mm): 900 Spread (m): 6N, 6E, 6S, 6W Crown Clearance (m): 5 Life Stage: Mature Rem. Contrib.: 40+ Years	Trunk - codominant stems at 5m Crown - minor deadwood < 100mm Trunk - epicormics/suckers	B1,2	Radius: 10.8m. Area: 366 sq m.	Physiological Cond: Fair Structural Cond: Fair Public Visual Amenity value: High	Epicormic removal.
Nt5	Birch (<i>Betula sp.</i>)	Tree 4 stems	Height (m): 17 4 stems, avg.(mm): 250 Spread (m): 3N, 5E, 5S, 5W Crown Clearance (m): 4 Life Stage: Mature Rem. Contrib.: 40+ Years	Offsite - unable to survey effectively due to access No significant defects	B1,2	Radius: 6.0m. Area: 113 sq m.	Physiological Cond: Good Structural Cond: Good Public Visual Amenity value: High	Epicormic removal.
T649	Weeping willow (<i>Salix babylonica</i>)	Tree	Height (m): 20 Stem Diam(mm): 1240 Spread (m): 8N, 8E, 8S, 8W Crown Clearance (m): 2 Life Stage: Mature Rem. Contrib.: 40+ Years	Trunk - codominant stems at 5m Crown - minor deadwood < 100mm Historically pollarded.	B1,2	Radius: 14.9m. Area: 697 sq m.	Physiological Cond: Fair Structural Cond: Fair Public Visual Amenity value: High	Epicormic removal.
T650	London plane (<i>Platanus x hispanica</i>)	Tree	Height (m): 20 Stem Diam(mm): 1200 Spread (m): 9N, 9E, 9S, 9W Crown Clearance (m): 4 Life Stage: Mature Rem. Contrib.: 40+ Years	Trunk - codominant stems at 5m Crown - minor deadwood < 100mm	B1,2	Radius: 14.4m. Area: 651 sq m.	Physiological Cond: Fair Structural Cond: Fair Public Visual Amenity value: High	Epicormic removal.
T650	Weeping willow (<i>Salix babylonica</i>)	Tree	Height (m): 20 Stem Diam(mm): 1080 Spread (m): 8N, 8E, 8S, 8W Crown Clearance (m): 2 Life Stage: Mature Rem. Contrib.: 40+ Years	Trunk - codominant stems at 5m Crown - minor deadwood < 100mm Historically pollarded.	B1,2	Radius: 13.0m. Area: 531 sq m.	Physiological Cond: Fair Structural Cond: Fair Public Visual Amenity value: High	Epicormic removal.

Appendix 2 Tree Constraints Plan

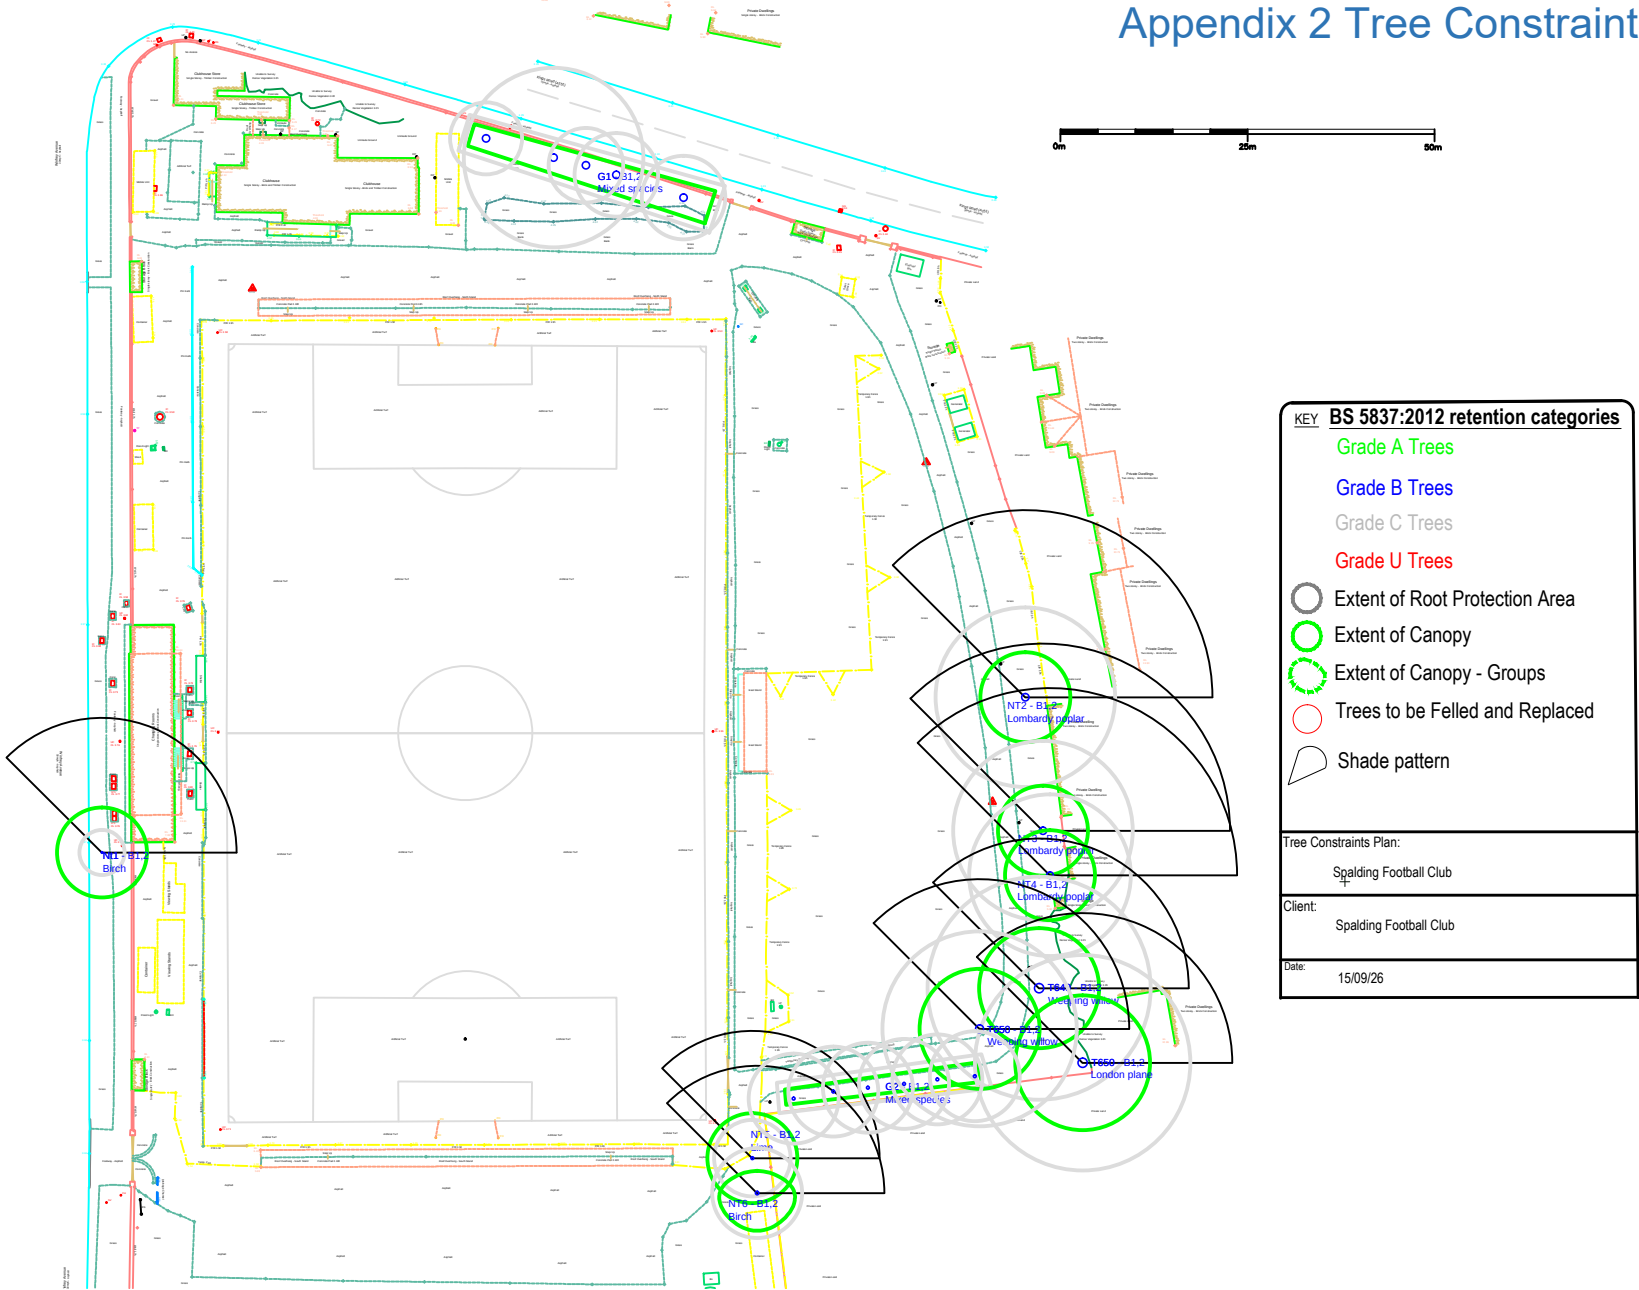

Appendix 3. Tree survey

The trees were assessed objectively using 'Visual Tree Assessment' (VTA) techniques from the ground. VTA is a methodology, employed by arboriculturists, to evaluate the structural integrity of a tree, relying on observation of a tree's biomechanical and physiological features; this is the method generally adopted and is appropriate in this instance. The survey includes an individual tree number listed sequentially, tree Species in both its common and botanical name, its height, stem diameter measured at 1.5m from ground level, spread of the radius of the crown by cardinal points, height of the crown above ground level, age classification its general condition and any general conditions structural or biological defects noted during the survey. An estimate of the remaining safe life expectancy (SLE) and the category as defined in BS 5837:2012 Recommendations cascade chart for tree quality assessment.

The root protection area (RPA) will be calculated from the stem diameter and this will identify the area which will require special protection during the works.

Trees on the site have been divided into one of four categories (based on the cascade chart for tree quality assessment). These are classed as A, B, C or U (Section 4 of BS 5837) within the table in Appendix 1, Table 2. This gives an indication as to the tree's importance in relation to the site, the local landscape and, also, the value and quality of the existing trees on site. This assists informal decisions concerning which trees should be removed or retained should development occur. For a tree to qualify under any given category it should fall within the scope of that category's definition (see below).

Categories A, B and C cover trees that should be a material consideration in the development process, each with three further sub-categories (i, ii, iii) which are intended to reflect arboricultural, landscape and cultural (nature conservation) values. Category U trees may have no significant landscape value, but it is not presumed that there is any overriding need to remove these unless stated otherwise in the description and recommendations. They are for this reason not considered as being significant within the planning process. In assigning trees to the A, B or C categories, and the presence of any serious disease or tree-related hazard is taken into account. If the disease is considered fatal and/or irremediable, or likely to require sanitation for the protection of other trees it may be categorised as U with a recommendation for work or even removal, even if they are otherwise of considerable value.

Category (A): Trees whose retention is most desirable and are of high quality and value. These trees are considered to be in such a condition as to be able to make a lasting contribution (a minimum of 40 years) and may comprise:

- (i) Trees which are particularly good examples of their species especially rare or unusual, or essential components of groups or of formal or semi-formal arboricultural features (e.g. the dominant and/or principal trees within an avenue);



- (ii) Trees, or groups of trees which provide a definite screening or softening effect to the locality in relation to views into or out of the site, or those of particular visual importance (e.g. avenues or other arboricultural features assessed as groups);
- (iii) Trees or groups of significant conservation, historical, commemorative or other value (e.g. Veteran or wood-pasture trees).

Category (B): Trees whose retention is considered desirable and are of moderate quality and value. These trees are considered to be in such a condition as to make a significant contribution (a minimum of 20 years) and may comprise:

- (i) Trees that might be included in the high category but because of their numbers or slightly impaired condition (e.g. presence of remediable defects including unsympathetic past management and minor storm damage), are downgraded in favour of the best individuals;
- (ii) Trees present in numbers such that they form distinct landscape features and attract a higher collective rating than they would as individuals. Individually these trees are not essential components of formal or semi-formal arboricultural features, or trees situated mainly internally to the site and have little visual impact beyond the site;
- (iii) Trees with clearly identifiable conservation or other cultural benefits.

Category (C): Trees that could be retained and are considered to be of low quality and value. These trees are in an adequate condition to remain until new planting could be established (a minimum of ten years) or are young trees with a stem diameter below 150 mm and may comprise:

- (i) Trees not qualifying in higher categories;
- (ii) Trees present in groups or woodlands, but without this conferring on them significantly greater landscape value and or trees offering low or only temporary screening benefit;
- (iii) Trees with very limited conservation or other cultural benefits.

Category (U): Trees that are considered to have no significant landscape value, but it is not presumed that there is any overriding need to remove these unless stated otherwise in the description and recommendations. They are for this reason not considered as being significant within the planning process. These trees will be in such a condition that any existing value would be lost within 10 years and which should in the current context be ignored or removed for reasons of sound arboricultural management. Trees within this category are:

- (i) Trees that have a serious irremediable, structural defect, such that their early loss is expected due to collapse, including those that will become unviable after removal of other category U trees;
- (ii) Trees that are dead or are showing signs of significant, immediate or irreversible overall decline;



(iii) Trees infected with pathogens of significance to the health and or/safety of other trees nearby, or very low quality trees suppressing adjacent trees of better quality.

All U Category (poor quality) trees should generally be removed for reasons of sound arboricultural practice or health & safety, irrespective of any development proposals, unless they offer particular conservation value to the site, in which case this will be highlighted in the survey schedule along with appropriate recommendations.

As regards the C category trees, it may not always be possible or even desirable to retain low quality trees within the context of a proposed development, unless in such a location that they do not represent a significant constraint on the design brief. Young trees, and those with a stem diameter of less than 150mm, will normally be placed in the C category, unless it is considered that they are of especially good form or are of a species that is particularly rare, in which case they may be upgraded.

All A & B Category trees (high & moderate quality) will under normal circumstances be retained on development sites, and should ideally influence and inform the conceptual design, site layout, and in some cases the specific construction methods to be used – The root protection area and/or crown spread of these trees will generally form a construction exclusion zone, although under certain circumstances it may be possible to build or operate within these areas providing that appropriate measures and specifications have been formally agreed between the local planning authority, the consulting arborist and the developer/client.

This report is valid for two years from the date of site inspection. The condition of trees can change following severe weather conditions, the effects of diseases and pests, and other abiotic factors.

Appendix 4. Legal Constraints

Where Local Planning Authorities can assess trees as beneficial to the wider community in terms of their amenity value, they may be protected by a Tree Preservation Order (TPO).

In certain areas classified as Conservation Areas, all trees with a stem diameter of 75mm (measured at 1.5m above ground) are protected by Conservation Area legislation. The LPA must be given notice of any work intended so they can visit the site and then either protect the tree(s) with a TPO or allow the works to go ahead. Their decision must be made within a six-week period. If no decision is made within the six-week period, the work may be carried out, providing it is done within a two-year period.

If trees protected by a TPO or within conservation areas are cut down, topped, lopped, uprooted or wilfully damaged or destroyed, the owner of the tree(s) and the contractor responsible for the work can both be legally prosecuted. The current maximum fine is £20,000 per tree at the Magistrates Court or unlimited fine at the Crown Court.



Trees that are dead or dangerous are exempt from legislation. It is common good practice to notify the LPA of intention to carry out work to trees that fall into these categories, preferably with some notice (e.g. one working week).

A leaflet produced by the DTLR (Protected Trees), covers the issues raised by this legislation. Any works prescriptions for protected trees can be dealt with by way of inclusion into a Planning Application for development purposes; this avoids the need to make a separate tree application.

A check with the Local Planning Authority has not been carried out.


Statutory wildlife obligations: The Wildlife and Countryside Act 1981 as amended by the Countryside and The Habitat Regulations 2012 and The Conservation of Habitats and Species Regulations 2017 provide statutory protection to birds, bats and other species that inhabit trees. All tree work operations are covered by these provisions and advice from an ecologist should be obtained before undertaking any works that might constitute an offence.

Appendix 5. Arboricultural considerations in relation to development.

Rooting structure

Rooting structure is a key issue when dealing with trees and development. To ensure the survival of trees the British Standard Institute has introduced the concept of a Root Protection Area (RPA). The RPA is an area surrounding a tree that contains sufficient rooting volume to ensure the tree's survival and is represented in square metres. (BS5837 2012 discusses the extent and form of a tree's root system.)

The following diagram represents the typical rooting pattern of a tree. Note that 90% of the tree's roots are usually located within the top 1m of soil and that roots may spread well beyond the canopy. Therefore, no works are allowed within the RPA. Even a small trench 0.5 metres deep to accommodate a cable or drain may lead to the loss of the tree. When work is proposed or is absolutely necessary within the RPAs of retained trees the proposals will only be considered if supported by an agreed robust and realistic Arboricultural Method Statement, following recommendations within BS 5837 2012.

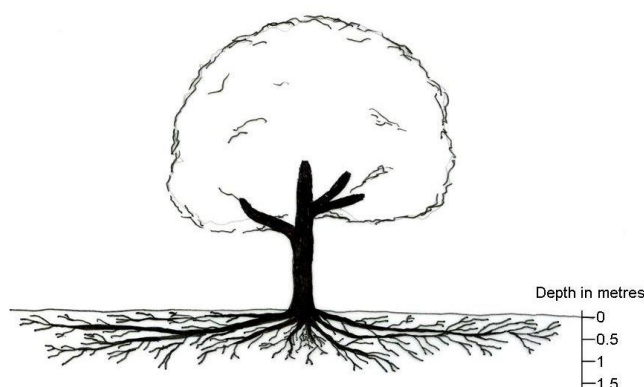

Typical rooting structure of a tree

To successfully integrate trees into a development it will be necessary to allow enough space in the design to allow trees to mature and flourish and to agree protection measures during the entire construction phase. Trees should be considered at the earliest design stage to allow them to be successfully integrated into new development, a survey of trees on and adjacent to the site should be one of the first steps in the design process.

How can trees be damaged?

Compaction of the soil

When soil is compacted, the soil structure is damaged by removing the spaces between soil particles preventing the exchange of gases and uptake of nutrients by trees. The storage of materials, including bricks, soil, gravel and cement, and the movement of vehicles can cause compaction. One vehicle's movement can cause sufficient compaction to damage a tree. Compacted ground may alter soil drainage, resulting in the ground becoming waterlogged. The storage of materials and the movement of vehicles within RPAs will only be permitted when it is shown to be absolutely necessary and supported by an agreed robust and realistic Arboricultural Method Statement.

Excavations

Excavations within the RPA are likely to cause root severance. This may lead to loss of vigor, reduced uptake of water and nutrients, allow access for decay organisms and may compromise the tree's stability. Under exceptional circumstances, where excavation may be justified, hand digging will be required and the presence of an arboricultural consultant to supervise the works will be required on site.

Ground level changes

Both reduction and raising of soil levels can be detrimental even if this is only by a few centimeters. Reducing ground levels may sever roots and can increase the drainage of a site thereby reducing water availability. Raising ground levels can cause compaction and suffocate roots. There will be a presumption against the changing of ground levels within RPAs. Changing of ground levels within RPAs will only be permitted when it is shown to be absolutely necessary and supported by an agreed robust and realistic Arboricultural Method Statement.

Impact damage

This can be caused by machinery and includes torn branches, and damage to bark and trunk. Damaged areas of trees can allow the entry of decay organisms and reduced vigour. There will be a presumption against the movement of machinery and equipment within RPAs. The movement of machinery and equipment will only be permitted when it is shown to be absolutely necessary and supported by an agreed robust and realistic Arboricultural Method Statement.



Soil contamination

This can be caused by the spillage of oil, fuel and chemicals, mixing cement or other materials. To prevent leaching through the soil where significant tree roots can be found, all chemicals should be kept in a safe storage area downhill from trees at least 10m from the RPA. There will be a presumption against the storage of chemicals within 10m of the RPAs of retained trees and storage will only be permitted when it is shown to be absolutely necessary and supported by an agreed robust and realistic Arboricultural Method Statement.

Fires

Conducted and radiated heat as well as flames will damage trees resulting in the loss and damage to both major and fibrous roots, and damage to the trees vascular system under the bark even if the bark does not appear burnt. Keep fires a minimum of 10m from the outer crown spread of any retained trees or vegetation. If this clearance is not achievable, all waste must be disposed of off-site.

Appendix 6. Biosecurity advice

Please see the Forestry Commission's latest guidance in relation to biosecurity.

Biosecurity measures are a series of precautionary steps designed to reduce the risk of transmission of harmful organisms and must address 'movement pathways' for such organisms. In the context of the following guidance, good biosecurity practice refers to ways of working that minimise the risk of contamination and the spread of pests and invasive plants. Unless stated otherwise, the term "pest" should be taken to include all invertebrate, bacterial or fungal organisms that are harmful to trees. The term does not refer to other threats to trees such as deer or grey squirrels.

https://www.forestryresearch.gov.uk/documents/5498/FC_Biosecurity_Guidance_Y6HQJHZ.pdf

Appendix 7. References

British Standards Institute. (2010). Recommendations for Tree Work BS3998:2010 BSI, London.

British Standards Institute. (2012). Trees in Relation to Design, Demolition and Construction - Recommendations BS5837:2012 BSI, London.

Ministry of Housing, Communities & Local Government. (2014). Tree Preservation Orders and trees in conservation areas. London: Ministry of Housing, Communities & Local Government.

Mattheck & Breloer, H. (1994). Research for Amenity Trees No.4: The Body Language of Trees, HMSO, London.

NHBC Standards (2007) Chapter 4.2 'Building Near Trees'. National House-Building Council.

NJUG 4 Guidelines for the planning, installation and maintenance of utility apparatus in proximity to trees. Issued 16 November 2007.



Forestry Commission (2007). Tree Felling - Getting Permission. Country Services Division, Forestry Commission, Edinburgh.

Patch, D. Holding, B. (2006) Arboricultural Practice Note 12 (APN12), Through the Trees to Development. Arboricultural Advisory and Information Service (AAIS).

Lonsdale, D. (1999). Research for Amenity Trees No 7: Principles of Tree Hazard Assessment and Management, HMSO, London.

National Tree Safety Group (2011). Common Sense Risk Management of Trees. Forestry Commission.

