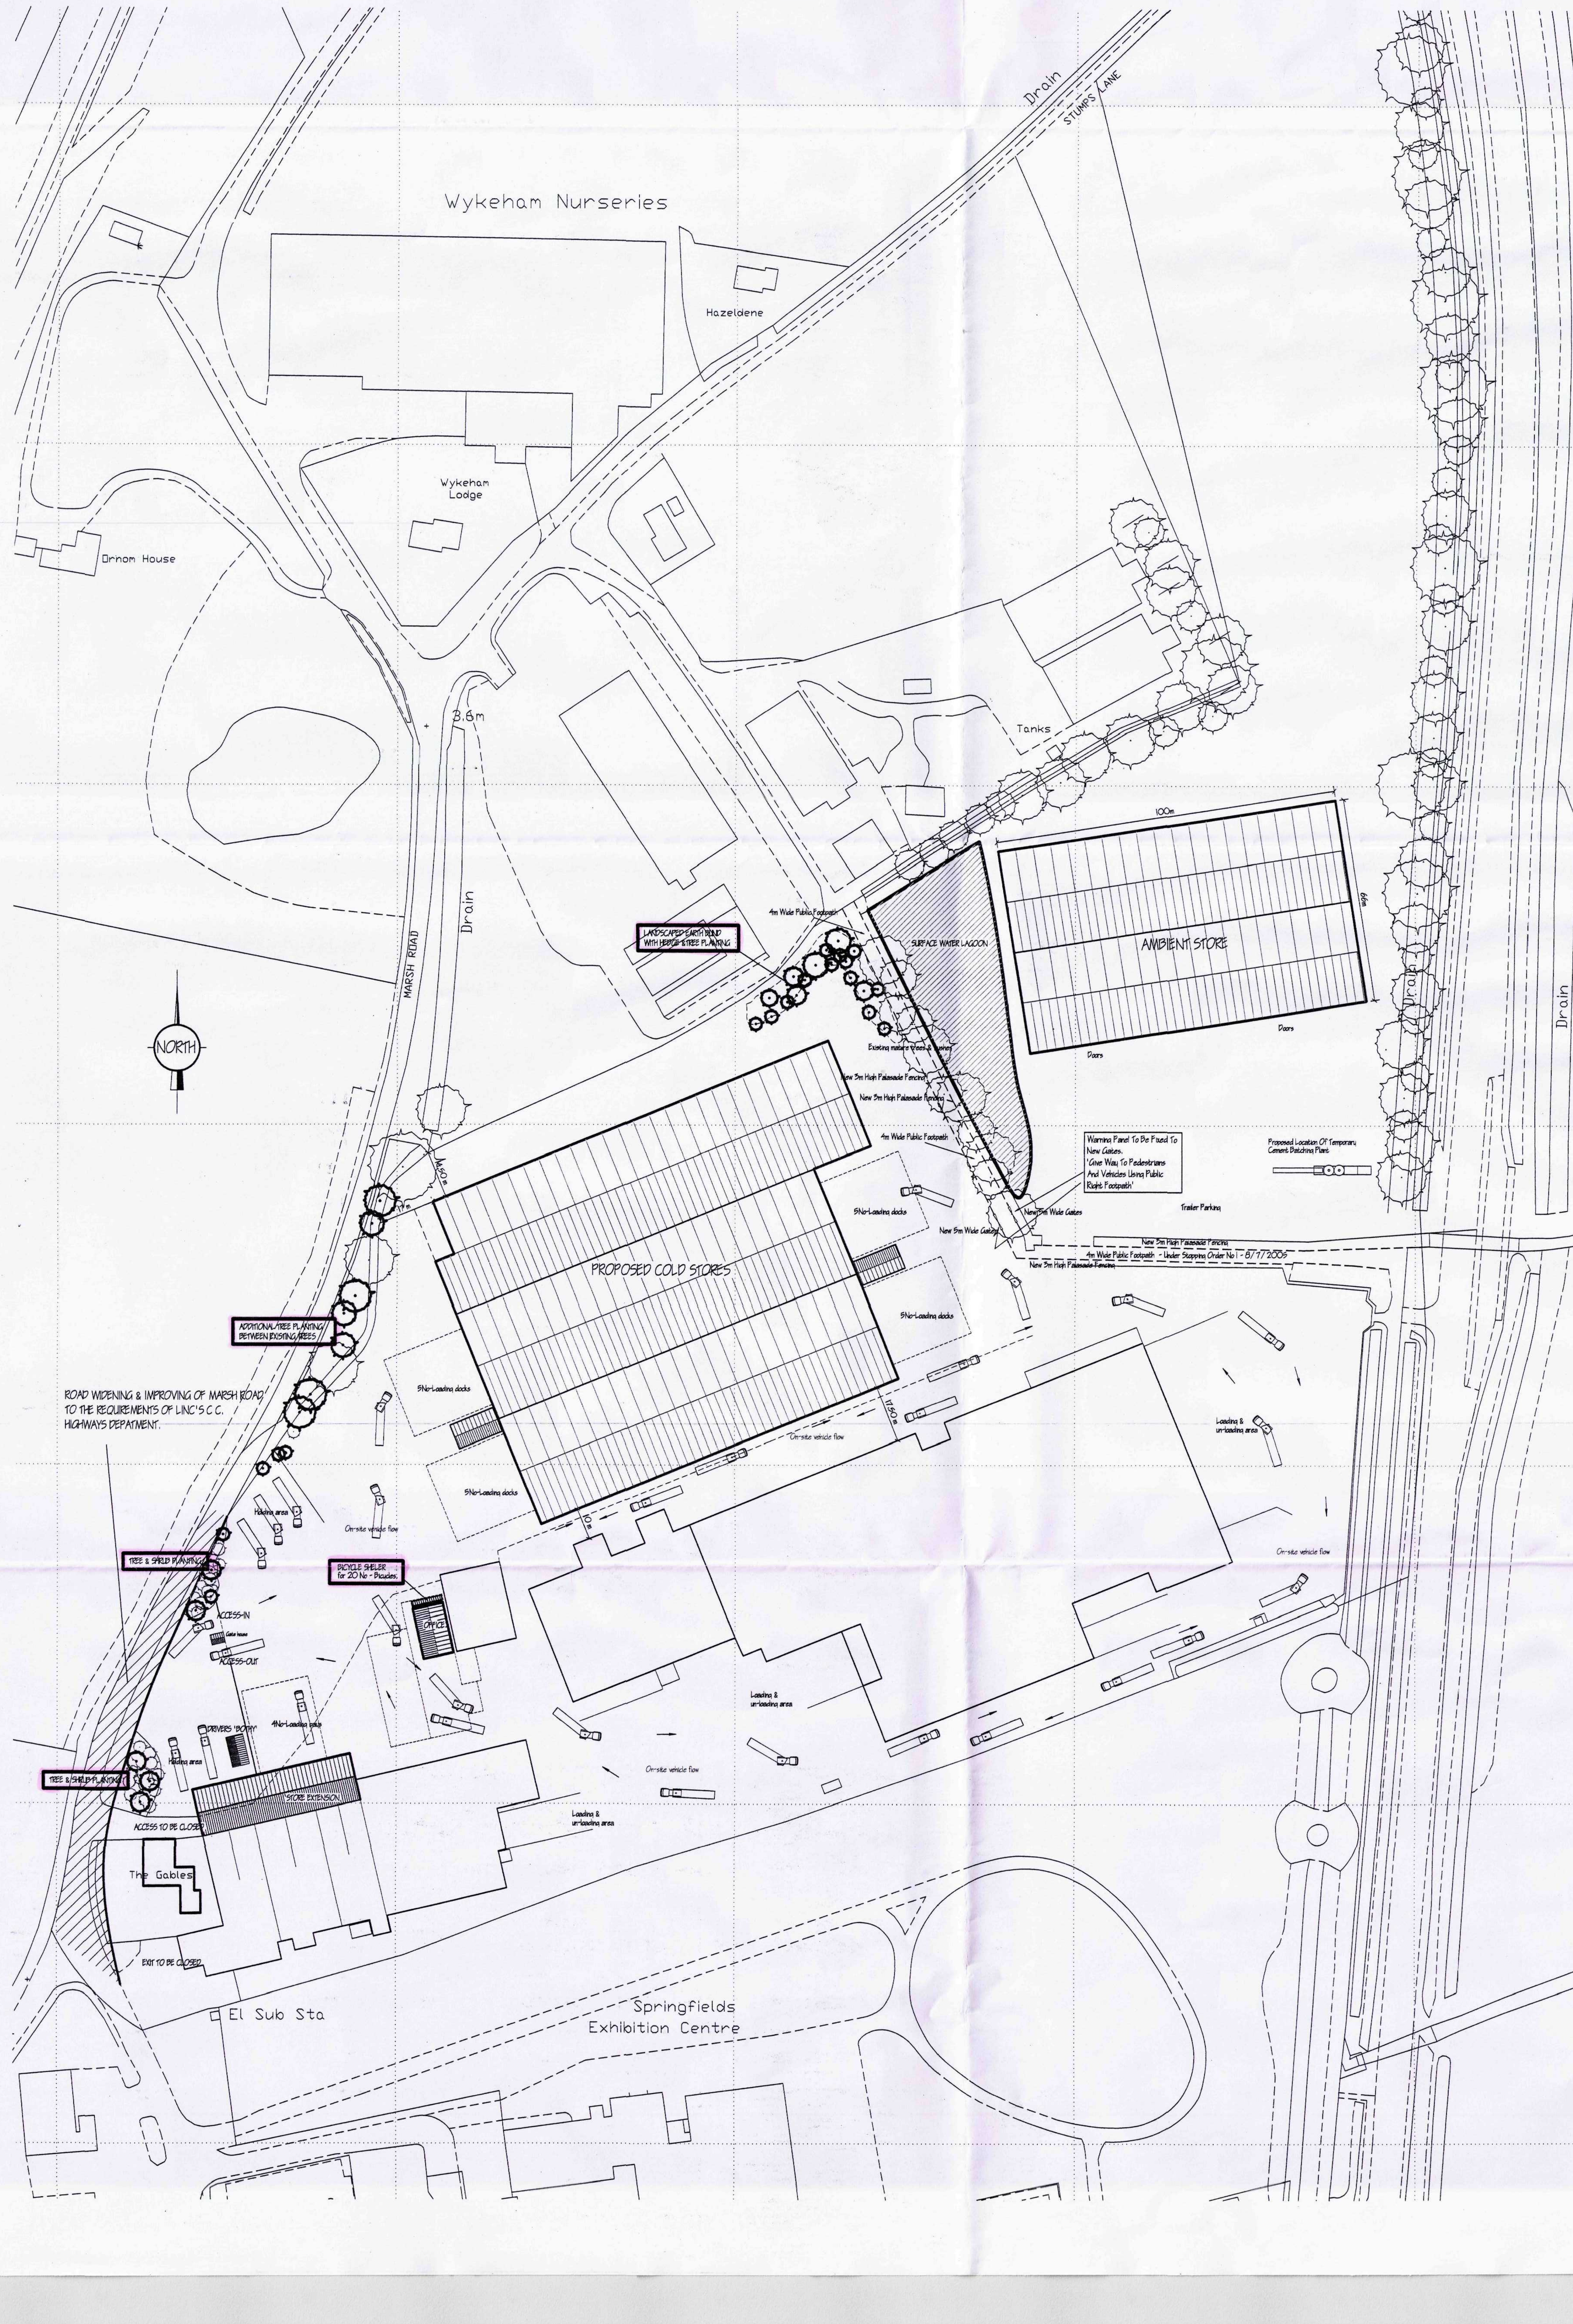

GENERAL LANDSCAPING & TREE PLANTING SCHEDULE

MIXED HEDGING:

(a) HAWTHORN (Crataequs Manoquna)
(b) BLACKTHORN (Prunus Spinosa)
(b) DOG ROSE (Rosa Canina)

Mixed hedging to the planted in double rows using 600mm high plants at 200mm spacings in a mix comprising 25% of each species.

HAWTHORN (Crataequs Manoquna) - FEATHERED
BEECH (Faqusb Sylvatica) FEATHERED
HAZEL (Corylus Avellanc) FEATHERED
FIELD MAPLE (Acer Campostre) FEATHERED
SILVER BIRCH (Betula Pendula) FEATHERED
WHITE BEAM (Sorbus Aria) FEATHERED
HORSE ESTNUTS (Asecuius Hippocastanum) FEATHERED
ROWAN (Sorbus Avcuparia) FEATHERED

All planting to be in accordance with BS 4428:1989 and amendment No. 1 (1991)
All trees to be planted with minimum 0.6m plastic mulch mat and to be staked, tied and tubed.
1/3 to ½ bag of peat free tree and shrub planting compost to be incorporated into backfill for each tree hole.

NOTE :-

WIND DAMAGED TREES & BUSHES REMOVED & REPLACED WITH NATIVE SPECIES
EXISTING HEDGEROWS NEED MAINTENANCE, REMOVE IVY & REPLACE AS NECESSARY

SHRUBBERY AREAS :-

PLANT NAME & SPECIFICATION (for planting season) Oct-Mar only

Berberis Thunbergii - Transplant 1+2 450-600mm high
Cotoneaster Franchetti - Transplant 1+1 450-600mm high
Hedera Helix 'Hibernica' - 300-450mm spread. 9cm.pot. minimum of 3 no. breaks
Ligustrum Ovalifolium 'Aureum - 300-450mm high. 3L.pot
Lonicera Pileata - 300-450mm spread. 3L.pot
Prunus Lusitanica - 450-600mm high. 3L.pot
Prunus 'Otto Luyken' - 300-450mm spread. 3L.pot
Pyracantha 'Soleil D'Or' - 450-600mm high. 3L. pot
Rosa Rugosa 'Frau Dagmar Hastrup' - 300-450mm high. Bare root
Rubus Cockburnianus - 600-900mm high. 3L. pot
Rubus Tridel Benenden - 450-600mm high. 3L. pot

N B: AFTER PLANTING 65MM DEEP LAYER OF MEDIUM GRADE BARK MULCH TO BE APPLIED.

NOTE :-
Re - CONDITION 7.
For details of surface water disposal see details by SRC Ltd & Drawings - 40410/05B & 40410/06A

- EXISTING TREES
- PROPOSED TREES

ref	revision	date
G.	S/W DISPOSAL, BICYCLE SHELTERS & LANDSCAPINGS.	NOV' 2011.
F	SECURITY FENCE & GATES TO FOOTPATH	AUG 2011
E	BATCHING PLANT ADDED	JUNE 2011
D	BUILDING RE-ORIENTATED	MAY 2011
C	PHASE TWO ADDED	MAY 2011
B.	AMEND ACCESS.	APRIL 2011.
A.	CLENTS AMENDMENTS - COLD STORE LAYOUT.	APRIL 2011.

G. R. MERCHANT LTD.
I.ENG AMICE FIWO

ARCHITECTURAL, STRUCTURAL AND LAND DRAINAGE CONSULTANTS

4 Wrights Mews
12A Park Road, Holbeach,
Spalding, Lincs. PE12 7EE
Tel: 01406 490800
Fax: 01406 425744
E-Mail: gr.merchant@btconnect.com

Project
CHANGE OF USE OF LAND TO STORAGE.
CAMELGATE / MARSH ROAD.
SPALDING.
LINC'S. PE12 6ES.

Client
T.F. BOWMAN & SON.

Drawing
SITE LAYOUT PLAN.

SHDC
PLANNING & DEVELOPMENT
05 DEC 2011
Ref. 0962-11

Job Ref.	Drawing No.
2099-10.	06G
Date	**Drawn**
JUNE 2010.	GRM.

Scales
1:1000

DO NOT SCALE FROM THIS DRAWING

This drawing is copyright and may not be altered, traced, photographed or used for any other purpose other than that for which it is issued. The General Contractor is to check all dimensions on site and report any discrepancies to the Architect. All details shown on this drawing including foundations are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions which may be discovered during construction unless reported to the Architect so that design amendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken. This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Planning / Building Regulation approval. This drawing must not be used as a contract document alone. The works will not be supervised or inspected on site by G R Merchant or any representative thereof. It is the client or their appointed agents responsibility to control workmanship, substitution of materials, adherance to specification, variations to contract etc.All materials to be new unless otherwise stated and all components and materials etc. to be used fitted and installed etc. in strict accordance with manufacturers instruction and relevant code of practice. Materials shall conform to appropriate British standard specification or BBA certificate or European code equivalent. The Employer / Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health and Safety legislation for Building sites and Work places. The Employer / Client is advised that should the works need to comply with the Construction Design and Management Regulations an independant Planning Supervisor will be required. The works shall comprise of all that is shown on the drawing and details. Work that may not specifically be shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included. It is the plot / land owners responsibility to be aware of the Party Wall etc. Act 1996: when building in close proximity to adjoining neighbors boundaries.