EC HARRIS
BUILT ASSET
CONSULTANCY

Works Photo Schedule	
Project Name	Spalding Magistrates Access Control

Door Number	Description	Works Description	Photos
Ground Floor, G/1	Magistrates Entrance, external door.	Arched double entrance door. Existings digi lock to be removed. One part of door is bolted closed. Electromagnetic lock to be fitted to opening leaf. Proximity sensor to be fixed to right hand side of entrance. Push button on exit.	 
Ground Floor, G/2	Witness Waiting, internal door	New door in plasterboard partition. Proximity sensor to be provided from public entrance to Witness Waiting. Push button on exit.	
Ground Floor, G/3	Staff Kitchen, internal door	Proximity sensor to be provided from public entrance to Kitchen. Push button on exit.	

SHDC
Planning & Development
29 DEC 2011
Ref: 1022-11

EC HARRIS
BUILT ASSET
CONSULTANCY

Works Photo Schedule	
Project Name	Spalding Magistrates Access Control

Door Number	Description	Works Description	Photos
Ground Floor, G/4	Corridor Door to Custody, Interview Rooms and Staff Offices, internal door	*Arched door requiring* electromagnetic lock. Proximity sensor to be provided from public entrance. Push button on exit. Door release required at Security Desk.	  
Ground Floor, G/5	Courts Office behind Security Desk, internal door	New door requiring proximity sensor to be provided from public entrance. Push button on exit.	
Ground Floor, G/6	Staircase Gate, internal door	Gate on stairs requiring proximity sensor both side of door. The sensor to be located on the side of the Male Public Toilet	 

EC HARRIS
BUILT ASSET
CONSULTANCY

Works Photo Schedule	
Project Name	Spalding Magistrates Access Control

Door Number	Description	Works Description	Photos
Ground Floor, G/7	Magistrates, Clerks Office entrance, external door.	Proximity sensor to be fixed to right hand side of entrance. Push button on exit. Existing electric strike to be retained.	  
Ground Floor, G8	Pedestrian and Vehicle Gate	Replace existing proximity sensors on external pole. Straighten existing pole. Retain existing pedestrian and vehicle gate controls.	 

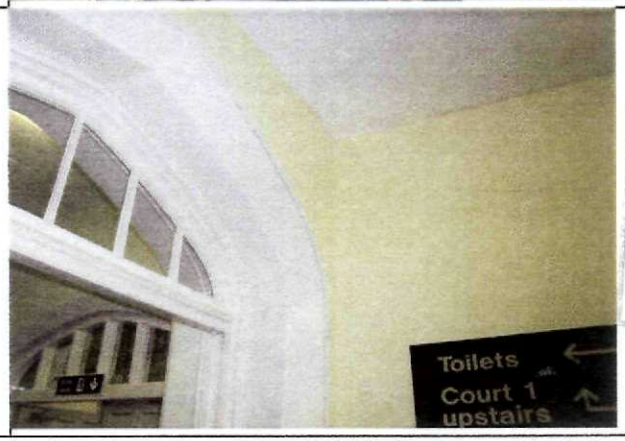
EC HARRIS
BUILT ASSET
CONSULTANCY

Works Photo Schedule	
Project Name	Spalding Magistrates Access Control

Door Number	Description	Works Description	Photos
First Floor, F/1	Witness Services Entrance Door, external door	Proximity sensor to be fixed to left hand side of entrance. Push button on exit.	 
First Floor, F/2	Remote Witnessing, internal door	New door in plasterboard partition. Proximity sensor to entrance with push button on exit.	

EC HARRIS
BUILT ASSET
CONSULTANCY

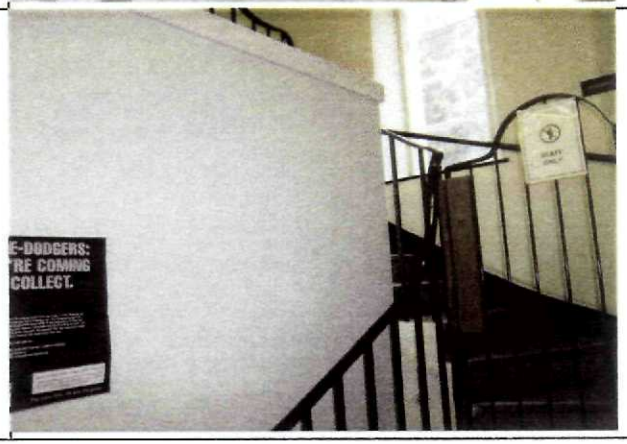
Works Photo Schedule	
Project Name	Spalding Magistrates CCTV Installation

Camera	Description	Works Description	Photos
C1	Magistrates Entrance.	Camera to be located in corner below staircase landing and directed towards external doors.	
C2	Waiting Area	Camera to be located in corner of Waiting Area	

SHDC
Planning & Development
29 DEC 2011
Ref: 1022-11

EC HARRIS
BUILT ASSET
CONSULTANCY

Works Photo Schedule	
Project Name	Spalding Magistrates CCTV Installation

Camera	Description	Works Description	Photos
C3	Staircase near Waiting Area	Camera to view staircase	
C4	Staff Staircase	Camera to be placed to review staff staircase	

EC HARRIS
BUILT ASSET
CONSULTANCY

Works Photo Schedule	
Project Name	Spalding Magistrates CCTV Installation

Camera	Description	Works Description	Photos
C5	Top of stairs to Court	Camera to be placed a top of public staircase	
C6 & C7	Custody Entrance	Camera to be located either side of Custody Door to provide view towards Waiting Area and of Custody corridor	

EC HARRIS
BUILT ASSET
CONSULTANCY

Works Photo Schedule	
Project Name	Spalding Magistrates CCTV Installation

Camera	Description	Works Description	Photos
External - Pole Mounted Cameras	Pole mounted cameras to be positioned to provide coverage of Main Entrance and Secure Car Park.	Pole located near vehicle entrance, adjacent to tree. The pole is to be located far enough away from the tree to avoid interference from branches. Cameras to be positioned to provide coverage of Main Entrance and Secure Car Park. If suitable power can be taken from vehicle barrier then wireless video and telemetry system can be utilised.	  

EC HARRIS
BUILT ASSET
CONSULTANCY

Works Photo Schedule	
Project Name	Spalding Magistrates CCTV Installation

Camera	Description	Works Description	Photos
External Wall Mounted on Witness Service Entrance	2no wall mounted cameras providing coverage of rear of Court and side entrance	Cameras to be mounted on staircase housing	 