


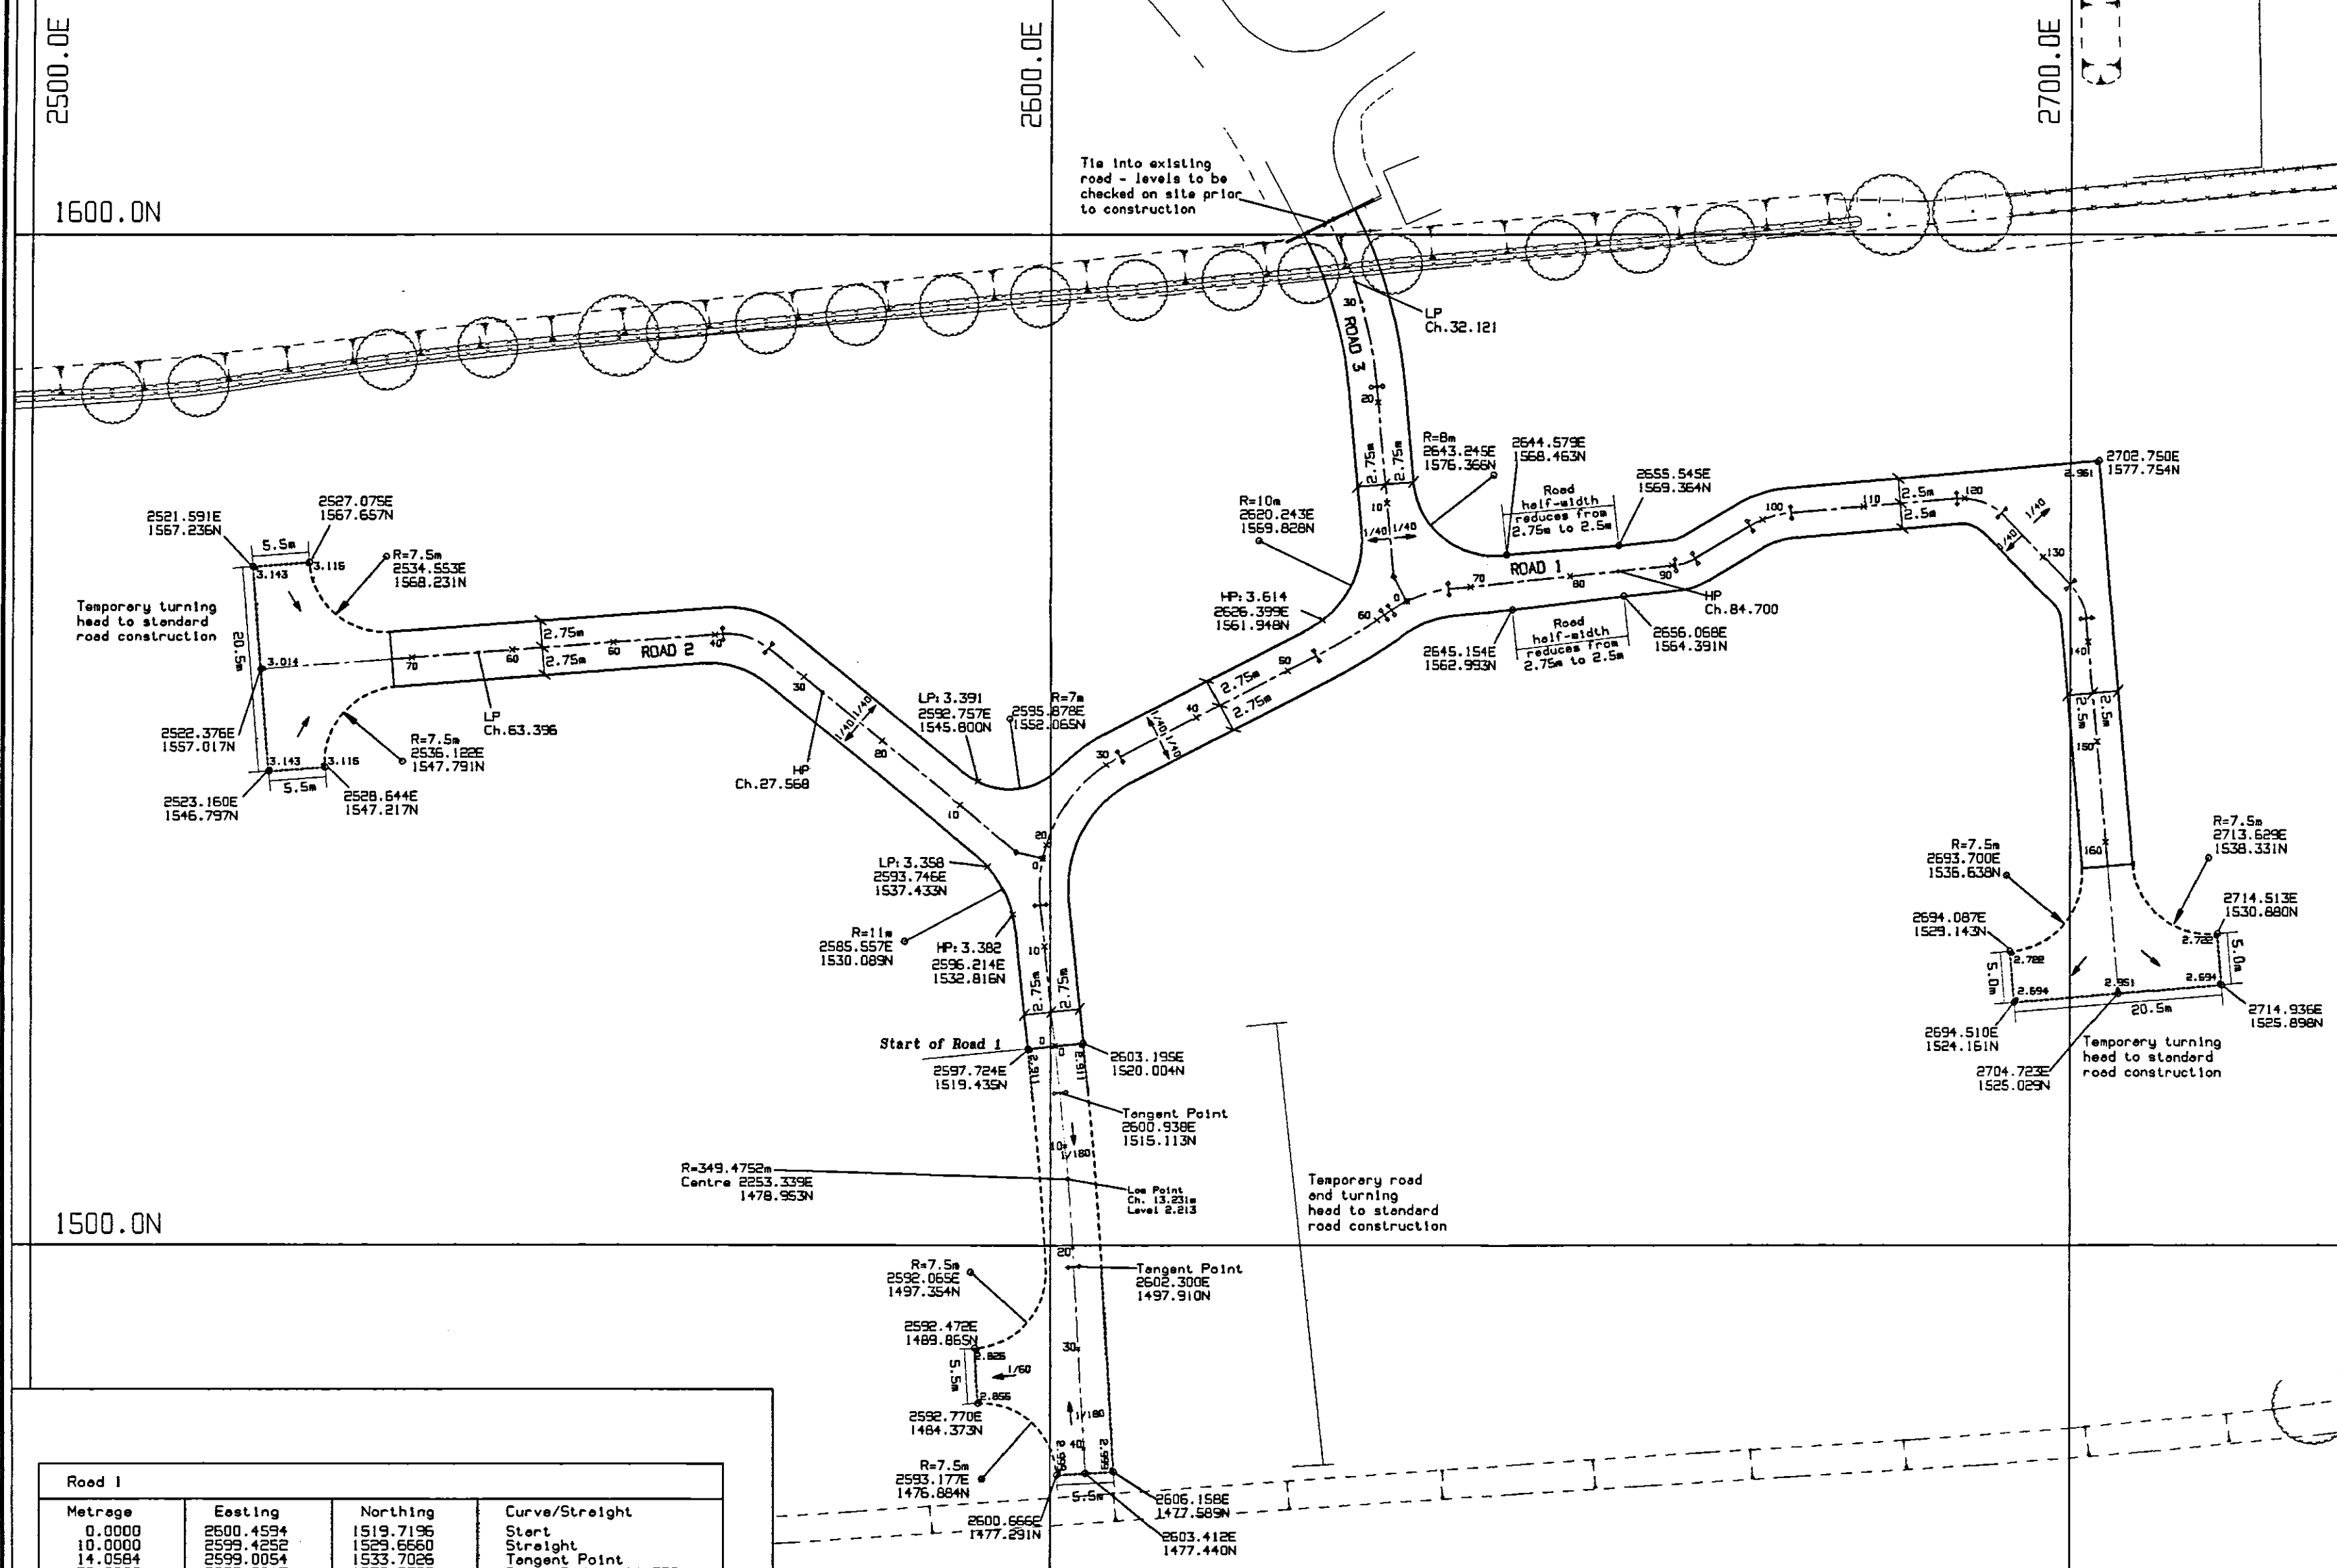

SHDC
Planning & Development
27 JUL 2007
Ref: 1030/07

Rev. No.	REVISION	Date	Drawn By	Checked By
A	Setting out of temporary turning head at start of road 1 added.	16/12/06	NJB	HGC
B	Centre line setting out for temporary turning head added.	9.1.06	NJB	

Written dimensions to be taken. Do not scale off the drawing.
Any discrepancies, written or scaled, should be brought to the attention of the engineer immediately.
This drawing to be read in conjunction with the relevant Bills of Materials and Local Authority Specification.
CDM NOTE: The design has been undertaken as far as possible to avoid risks to health and safety or to reduce and control the effects of any unavoidable risks.
All relevant information identifying the unavoidable risks has been passed to the planning supervisor for inclusion in the Health & Safety plan.
The Health & Safety plan will be issued by the planning supervisor with these drawings.

WORMALD, BURROWS PARTNERSHIP
Civil Engineering Consultants
12a & 14a Hitchin Street, Biggleswade, Beds SG18 8AX, U.K.
Tel 01767 317244 Fax 315434

Project
Development at Wygate South, Spalding, Lincolnshire

Drawing Description
Road Setting DETERMINED PLAN

Client Allison Homes Eastern Ltd Holland Place Wardentree Park Pinchbeck Spalding Lincs, PE11 3ZN	Client Drawing Number A027/206/01
Drawn By NJB Date Oct. 05	Scale 1:500
Engineering Drawing Number E1081/18/B	Checked By HGC Date Oct. 05

Road 1	Metrage	Eastings	Northings	Curve/Straight
	0.0000	2600.4594	1519.7196	Start
	10.0000	2599.4252	1529.6660	Straight
	14.0584	2599.0054	1533.7026	Tangent Point
	20.0000	2599.5817	1539.5759	Curve Radius 14.750
	30.0000	2605.4257	1547.4547	Curve
	31.5712	2606.7724	1548.2627	Tangent Point
	40.0000	2614.2208	1552.2079	Straight
	50.0000	2623.0578	1556.8886	Straight
	53.1289	2625.8227	1558.3531	Tangent Point
	60.0000	2631.6875	1561.9253	Curve Radius 57.278
	60.9045	2632.4262	1562.4471	Tangent Point
	61.7530	2633.1154	1562.9421	Curve Radius 11.748
	64.7965	2635.7885	1564.3793	Tangent Point
	67.8400	2638.7406	1565.0838	Straight
	70.0000	2640.8988	1565.3096	Straight
	80.0000	2650.8340	1566.3549	Tangent Point
	90.0000	2660.7792	1567.4002	Straight
	90.3580	2661.1353	1567.4377	Curve Radius 4.702
	92.4067	2662.1344	1567.6544	Tangent Point
	98.6105	2668.3827	1571.2737	Tangent Point
	100.0000	2669.6222	1571.8991	Curve Radius 9.500
	102.9151	2672.4421	1572.5913	Tangent Point
	110.0000	2679.5001	1573.2091	Straight
	119.2408	2688.7057	1574.0148	Tangent Point
	120.0000	2689.4541	1574.0287	Curve Radius 5.500
	124.0405	2693.0742	1572.4249	Tangent Point
	130.0000	2697.2882	1568.2109	Straight
	133.8084	2699.9811	1565.5180	Tangent Point
	135.7354	2701.0797	1563.9469	Curve Radius 5.501
	137.6623	2701.5725	1562.0941	Tangent Point
	140.0000	2701.7705	1559.7649	Straight
	150.0000	2702.6175	1549.8008	Straight
	160.0000	2703.4645	1539.8367	Straight
	162.3607	2703.6644	1537.4845	End

Road 2	Metrage	Eastings	Northings	Curve/Straight
	0.0000	2599.2426	1538.2664	Start
	2.7500	2596.5516	1538.8328	IP at Channel
	10.0000	2590.9735	1543.4640	Straight
	20.0000	2583.2796	1549.8517	Straight
	30.0000	2575.5857	1556.2395	Straight
	34.4359	2575.1727	1559.0731	Tangent Point
	36.8399	2570.0766	1560.2196	Curve Radius 5.248
	39.2440	2567.7034	1560.4956	Tangent Point
	40.0000	2566.9495	1560.4378	Straight
	50.0000	2556.9789	1559.6725	Straight
	60.0000	2547.0082	1558.9072	Straight
	70.0000	2537.0375	1558.1419	Straight
	71.9672	2535.0761	1557.9913	IP
	71.9672	2535.0761	1557.9913	End

Road 3	Metrage	Eastings	Northings	Curve/Straight
	0.0000	2634.6187	1563.8593	Start
	2.7500	2633.3663	1566.3076	IP at Channel
	10.0000	2632.7091	1573.5277	Straight
	20.0000	2631.8026	1583.4866	Straight
	21.5312	2631.6638	1585.0115	Tangent Point
	30.0000	2630.1094	1593.3237	Curve Radius 45.000
	38.4640	2627.0295	1601.1940	Tangent Point
	38.6170	2626.9606	1601.3306	End

Temporary Turning Head	Metrage	Eastings	Northings	Curve/Straight
	0.000	2600.449	1519.739	Start
	4.652	2600.938	1515.113	Tangent Point
	10.000	2601.451	1509.789	Curve Radius 349.475
	20.000	2602.191	1499.817	Curve Radius 349.475
	21.910	2602.300	1947.910	Tangent Point
	30.000	2602.738	1489.832	Start
	40.000	2603.281	1479.847	Start
	42.410	2603.412	1477.440	End