
This drawing is copyright & the property of EC Harris & must not be copied in whole or in part without their written permission. Copyright is reserved. ©
This drawing must not be scaled. The Contractor is to report all dimensional discrepancies & errors to the Contract Administrator prior to construction commencing
It is essential that this drawing is read in conjunction with all specifications/schedule of works & that all works are included for.

FIRST FLOOR PLAN

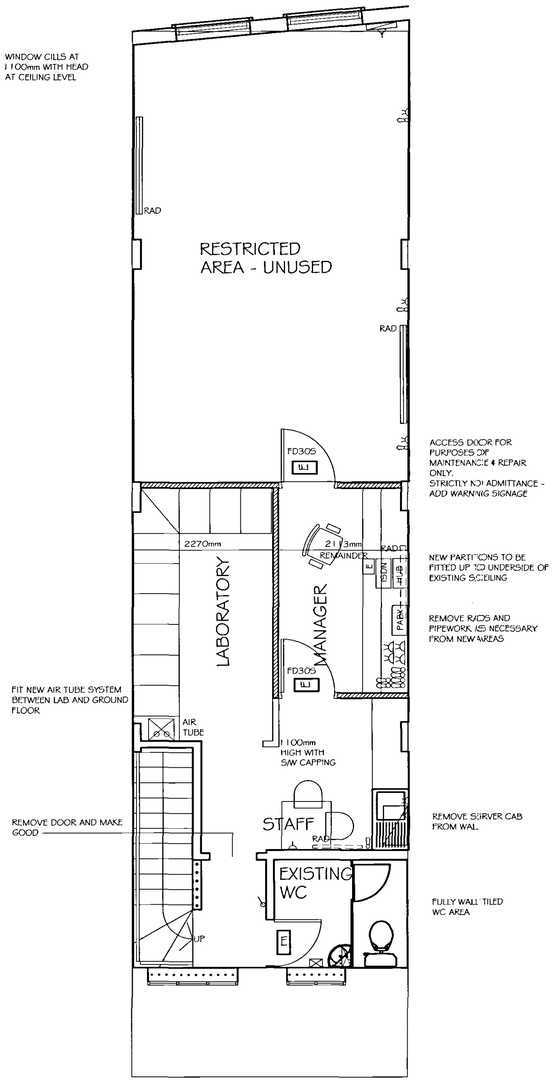

DRYLINING TO EXISTING WALLS CONSISTING OF 12.5mm PLASTERBD SCREWED TO METAL TOP HAT FRAMING SECTION. TAPED AND JOINTED FOR DIRECT DECORATION.

NEW 100mm NOM O/A STUD PARTITION CONSISTING OF 70S METAL STUDS AT 600mm CENTRES WITH ONE LAYER OF 12.5mmP/BOARD TO BOTH SIDES, TAPED AND JOINTED FOR DIRECT DECORATION.

NEW 100mm NOM O/A STUD PARTITION CONSISTING OF 70S METAL STUDS AT 600mm CENTRES WITH ONE LAYER OF 12.5mm P/BOARD TO BOTH SIDES, TAPED AND JOINTED FOR DECORATION. PTN TO EXTEND TO U/S STRUCT SOFFIT FOR SEAL
SOUND INSULATING QUILT TO BE INSTALLED BETWEEN STUDS.

NEW 120mm NOM O/A STUD PARTITION CONSISTING OF 70S METAL STUDS AT 600mm CENTRES WITH TWO LAYERS OF 12.5mm P/BOARD TO BOTH SIDES, TAPED AND JOINTED FOR DECORATION TO U/S SLAB.

NEW 120mm NOM O/A STUD PARTITION CONSISTING OF 70S METAL STUDS AT 600mm CENTRES WITH TWO LAYERS OF 12.5mm P/BOARD TO BOTH SIDES, TAPED AND JOINTED FOR DECORATION TO U/S SLAB.
SOUND INSULATING QUILT TO BE INSTALLED BETWEEN STUDS.

NOTE:- BUILD IN 12mm MDF OR PLY SHEET TO PARTITION / LINING OF DISABLED TOILET WALL WICH HAS GRAB RAILS FIXED TO SAME.
BUILD 12mm MDF OR PLY SHEET INTO PARTITION OR LINING TO REAR WALL OF EYE EXAM ROOMS TO ASSIST PROJECTOR FIXING.
BUILD MDF OR PLY PATERAE NOGGINS BETWEEN STUDS INTO PARTITION WALL IN EYE EXAM AND CONTACT LENS ROOMS FOR GLASS SHELF BRACKET FIXING.

INTERNAL DOOR SIZES:-

ALL NEW INTERNAL CORRIDOR AND ROOM DOOR SETS (NOT STORE OR ACCESSIBLE TOILET) ARE TO BE A MINIMUM OF 950 WIDE, DESIGNED TO GIVE A CLEAR OPEN DIMENSION FROM FACE OF OPEN DOOR LEAF TO OPPOSITE DOOR JAMB OF 800mm - BUILDING REGULATION PART M COMPLIANCE.

STORE DOORS MAY BE SMALLER (MINIMUM 700 SET-PREFERRED 900 SET).
ACCESSIBLE TOILET DOOR MUST BE 1000mm OVERALL SET.
OTHER STAFF TOILET COMMON ENTRANCE DOOR MAY BE LESS (MINIMUM 800 SET - PREFERRED 900 SET) .

FD 30 S VP SC = 30 MIN FIRE SOLID CORE FIRE DOOR CONSTRUCTION (FD30) , WITH INTUMESCENT SEALS INCLUDING SMOKE STOP (S), WITH VISION PANELS (VP), WITH DOOR CLOSER (SC).

ALL EMERGENCY LIGHTING TO BE IN ACCORDANCE WITH BS5266 PT 1 AND EN 1838:2005.
ALL ILLUMINATED EMERGENCY LIGHT FITTINGS TO BE 3 HR SELF MAINTAINED, IN ACCORDANCE WITH EU LEGISLATION. KEY TEST SWITCHES TO BE PROVIDED WITHIN SIGHT OF EMERGENCY FITTINGS.
FIRE ALARM SYSTEMS TO COMPLY WITH THE MALL CENTRE SPECIFICATIONS AND TO COMPLY WITH BS 5839 PT 1 AND AMENDMENTS.
EMERGENCY EXIT AND DIRECTIONAL SIGNAGE TO COMPLY WITH H&S (SAFETY SIGNS & SIGNALS) REGULATIONS 1996 AND AMENDMENTS , AND BS 5499 PTS 1 AND 5:2002 AND PT1 :2000.
FIRE ALARM CABLING TO COMPLY WITH MALL CENTRE SPECIFICATIONS AND BS 6004, BS 5839 PT 1 :2002, BS 8434 PT 2:2003, AND INSTALLED IN ACCORDANCE WITH IEE REGULATIONS 16TH EDITION AND AMENDMANTS.
ELECTRICAL COMMISIONING CERTIFICATES TO BE PROVIDED UPON COMPLETION.


INDICATIVE - ELECTRICAL / DATA POINTS REQUIRED

M&E CONTRACTOR DESIGNED AND INSTALLED ELECTRICAL INSTALLATION, LIGHTING INSTALLATION, DATA WIRING, MECHANICAL EXTRACT, AIR CONDITIONING AND FRESH AIR INPUT SYSTEMS.

- 13 AMP 2 GANG SWITCHED NEON SOCKET
- 13 AMP NEON SWITCHED FUSED SPUR
- P DENOTES FOR SANIVITE OR OTHER EQUAL APPROVED PUMPED SMALL BORE DRAINAGE PUMP.
- CAT 5E DATA OUTLET
- BT — BT OUTLET
- F — DEDICATED FAX LINE
- F — EPOS LINE
- HUB — COMMS BOX & HUB BY VE IT DEPT
- ISDN — BT ISDN LINE
- PABX — TELEPHONY PANEL

NEW ELECTRICAL INSTALLATION TO BE IN ACCORDANCE WITH BS7671 (2001) AND CURRENT IEE REGULATIONS 16TH EDITION AND AMENDMENTS.

FIRST FLOOR REFLECTED CEILING PLAN

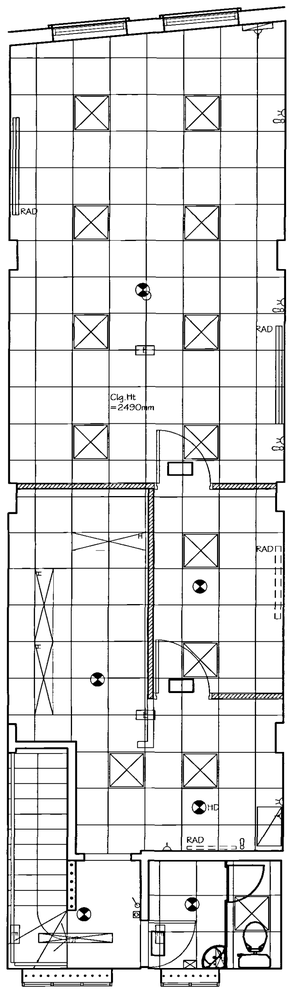

RETAIN EXISTING SUSPENDED CEILING & LIGHTING, EXCEPT FOR LAB AREA WHERE STD VE SPEC LIGHTING SHOULD BE FITTED

FIT NEW SMOKE DETECTORS AS INDICATED
HEAT DETECTOR IN STAFF AREA

PARTITIONS TO UNDERSIDE OF EX. CEILING

1090/08

Rev A	Air tube location indicated	08/10/2008 SW
Revisions	Comments	Dates
Client: VISION_EXPRESS		Date: 07/10/2008
		Drawn: SW
Project title: VISION_EXPRESS_SPALDING, 9 MALL PLACE,SPALDING,LANCS. PE11 1SA		Approved
		Scale: 1/50@A1 1/100@A3
Drawing title: FIRST_FLOOR_PLANS PROPOSED PLANS		Job No. 207/3262
		Dwg. No. SPALI02

EC HARRIS
EC Harris LLP
European Operations Centre (EOC) - Milton Keynes
The Pavillion, Sunrise Parkway,
Linford Wood, Milton Keynes, MK14 6LS
Tel: 01908 397366 Fax: 01908 397399
email: information@echarris.com
www.echarris.com
Delivering better value results for clients

PATH