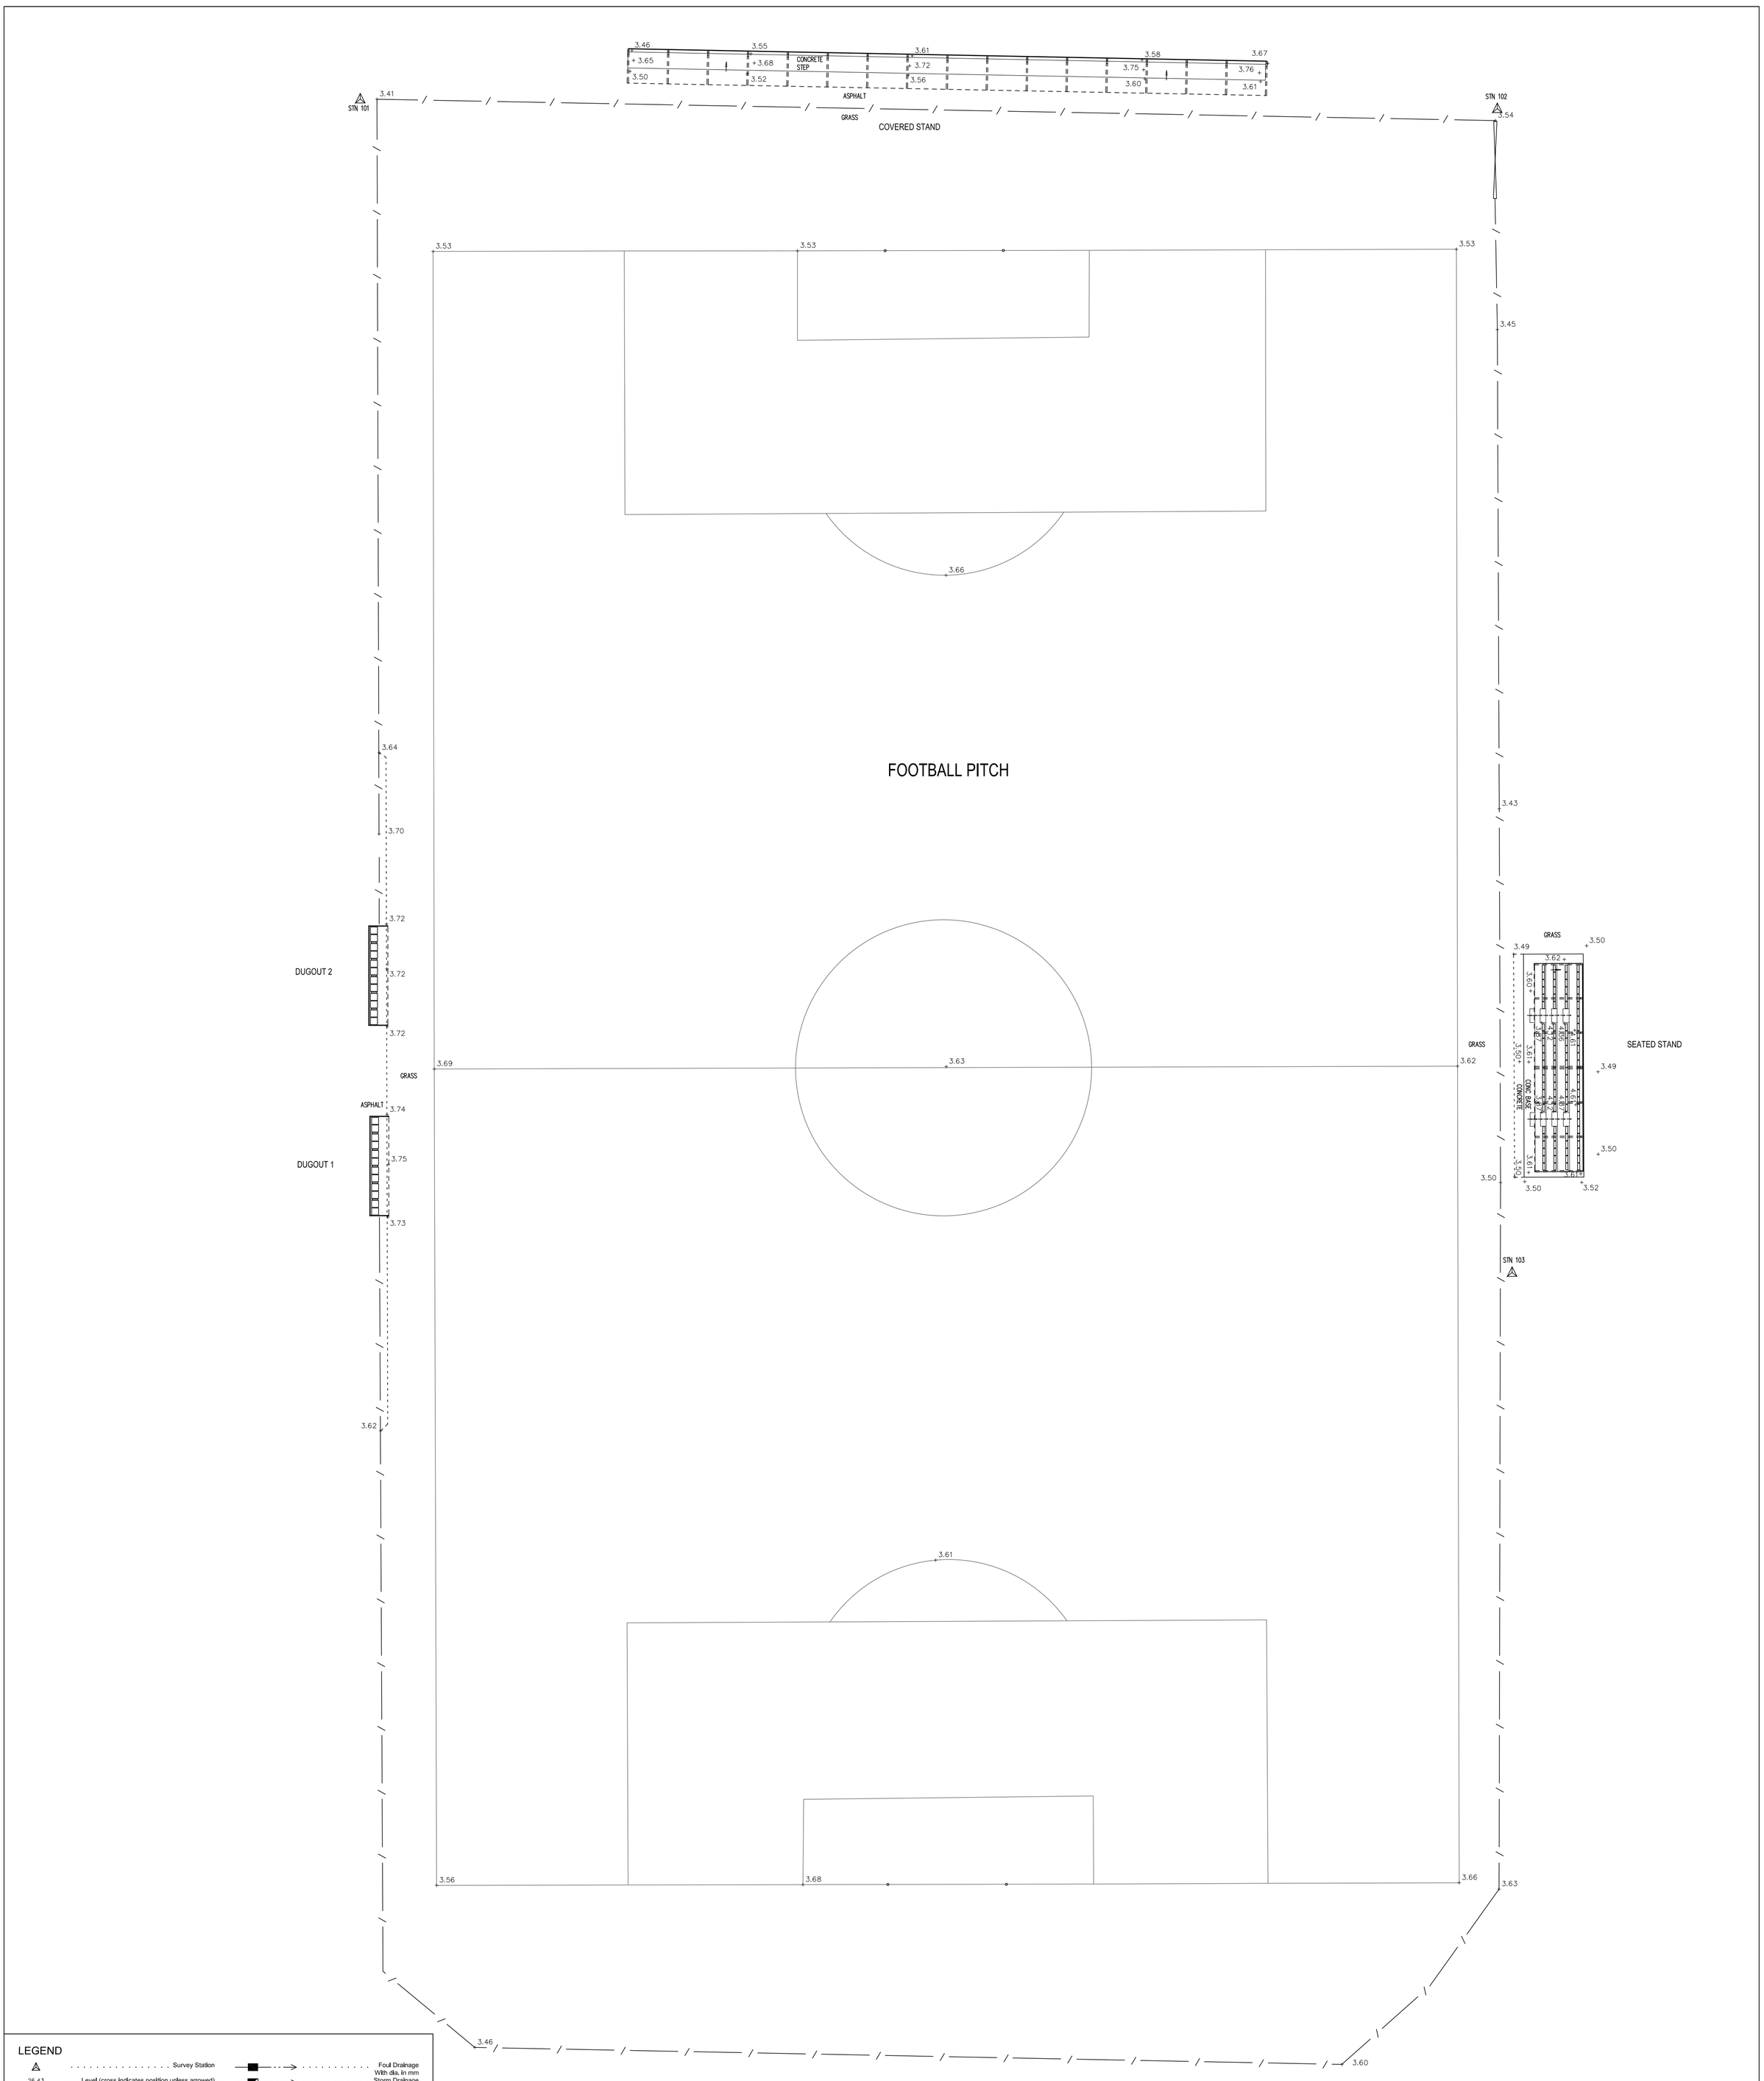

LEGEND

- Survey Station
- 26.43 Level (cross indicates position unless arrowed)
- Kerb
- Drop Kerb
- Change of Surface
- Top / Bottom — Banking
- Hedge / Bush Canopy
- Gate
- Wall
- Fence
- Foul Drainage With dia. in mm
- Storm Drainage
- OH — Overhead Electricity Line
- UG — Underground Electricity Line
- OH — Overhead Telephone Line
- UG — Underground Telephone Line
- 0.4/8.0 12m — Tree with trunk(dia.)/ Ave spread(,dia.) Height if specified
- Sapling

ABBREVIATIONS (Where applicable)

GENERAL

AV.	Air Valve
BB.	Bellisha Beacon
BG.	Box Gully
BL.	Bollard
BP.	Boundary Post
BS.	Bus Stop
CD.	Cable Duct
CL.	Cover Level
CM	Cable Marker
CPS.	Concrete Paving Slabs
DP	Down Pipe
ECB.	Electricity Control Box
ECP.	Electricity Cable Pit
EJB	Electricity Cable Junction Box
EP	Electricity Pole
ERP.	Earthing Point
FB	Flower Bed
FH	Fire Hydrant
FIG.	Feeds into Ground
FP	Footpath
G.	Gully
GP.	Gate Post
GV.	Gas Valve
H	Hydrant
IC.	Inspection Cover
IL.	Invert Level
KO.	Kerb Outlet
LP	Lamp Post
MH	Manhole
MKR.	Marker
NB	Notice Board
NFI	No Further Information
NSIF.	Not Surveyed - Information From
P	Post
PM	Parking Meter
PRV.	Pressure Reducing Valve
RE	Rodding Eye
RG	Road Gully
RS	Road Sign
RWP.	Rain Water Pipe
SC	Stop Cock
SP	Signpost
SV	Sluice Valve
T	Tree
TCB	Telephone Call Box
THL	Threshold Level
TIC	Telephone Inspection Cover
TJB	Telephone Junction Box
TL	Traffic Light
TP	Telephone Pole
UTL.	Unable to Lift
VP	Vent Pipe
WL	Water Level
WM	Water Meter
WV	Water Valve

FENCES AND WALLS

BKW.	Brick Wall
BLW.	Block Wall
BW	Post & Barbed Wire Fence
CB	Close Boarded Fence
CI	Corrugated Iron Fence
CP	Chestnut Paling Fence
CW	Concrete Wall
DSW.	Dry Stone Wall
IR	Iron Railing Fence
OB	Open Boarded Fence
PC	Post & Chain Fence
PCL	Post & Chain Link Fence
PF	Panel Fence
PR	Post & Rail Fence
PW	Post & Wire Fence
PWM.	Post & Wire Mesh Fence
RW	Retaining Wall
SF	Security Fence
STW	Stone Wall
SW	Sheep Wire Fence

OTHER ABBREVIATIONS USED ON THIS SURVEY

NORTH

0m 2m 4m 6m 8m 10m 20m

1:200

NOTES

SURVEY TIED INTO NATIONAL GRID OSTN02 AND OSGM02 DATUM FOR HEIGHT USING GPS EQUIPMENT UTILIZING THE TRIMBLE VRS NOW SYSTEM FOR REAL TIME KINEMATIC (RTK) CORRECTIONS NATIONAL GRID SCALE FACTOR HAS NOT BEEN APPLIED TO THE SURVEY UNLESS SPECIFIED

DRAINAGE AND SERVICE INFORMATION SHOWN ON THIS SURVEY HAS BEEN OBTAINED BY VISUAL INSPECTION ONLY. ALTHOUGH ALL POSSIBLE CARE HAS BEEN TAKEN TO ENSURE THAT DETAILS SHOWN ARE CORRECT, WE ARE UNABLE TO ACCEPT ANY RESPONSIBILITY FOR COSTS ARISING OUT OF ANY ERRORS OR OMISSIONS.

COPYRIGHT: THIS DRAWING MAY NOT BE REPRODUCED IN ANY FORM WHATSOEVER WITHOUT THE CONSENT OF CJ SURVEYS LTD.

STATION SCHEDULE

STN No.	EASTINGS	NORTHINGS	LEVEL	REMARKS
101	524642.606	323045.913	3.406	MAG NAIL
102	524713.862	323045.314	3.540	MAG NAIL
103	524714.791	322972.370	3.480	MAG NAIL

C J SURVEYS LTD
LAND | BUILDING | ENGINEERING
PROFESSIONAL MEASURED SURVEYS
Tel: 01638 581031 Mobile: 07845 775645
Web: www.cjsurveys.co.uk E.mail: mail@cjsurveys.co.uk

CLIENT SPALDING UNITED FC
C/O EDDISONS

DATE	DRAWN	SHEET SIZE	SCALE
DEC 2024	GS/CJ	A1	1:200

PROJECT TOPOGRAPHIC SURVEY
SPALDING UNITED FOOTBALL CLUB, WINFREY AVENUE, SPALDING, PE11 1DA

DRAWING NO. 02125/T1