



Brand Standards

2097 - Spalding

Planning pack

Holland Market,
Spalding PE11 1RQ,
United Kingdom

Approved

Sainsbury's

Contacts

Brand Agency	Alan Welsh 07525 101815	Merson Group Alan.Welsh@merson-signs.com
SSL SDDM	Harmeet Sembi 07733 232323	Sainsbury's Harmeet.Sembi@sainsburys.co.uk
Project Manager	Carl Chapman	Sainsbury's Carl.Chapman@sainsburys.co.uk
Signage Contractor	TBC	

INDEX:

Page:1.2	Revision	Page:3.10	BS28-2
Page:2.1	Building Vistas	Page:3.11	BS28-2
Page:3.1	Sign Locations 1	Page:3.12	BS28-2
Page:3.2	OS map	Page:3.13	BS29-2
Page:3.3	Elevation A, B	Page:3.14	BS29-2
Page:3.4	Elevation C, D	Page:3.15	BS29-2
Page:3.5	Argos Flex sign		
Page:3.6	Argos Flex sign		
Page:3.7	High level lettering		
Page:3.8	BS2		
Page:3.9	BS3		

NO SIGNAGE TO BE MANUFACTURED UNTIL ARTWORK APPROVED BY SDDM

Note: The dimensions that are shown in this pack are not to be used to manufacture signage, you do so at your own risk. All signage manufacturers are to undertake a detailed dimensions survey before commencing manufacture to ensure 100% accuracy at installation.

Rev	Page	Change	Reason	Issued to	Issued date
Draft	All	First Issue of planning pack.		HS	13.12.23
A	3.2	OS map updated		HS	18.12.23



Sign Locations 1

NO SIGNAGE TO BE MANUFACTURED UNTIL ALL PROPOSED SIGNAGE DIMENSION, POSITIONING AND MANUFACTURING ARTWORK (INCLUDING OFFERS & TRADING HOURS) ARE APPROVED BY SDDM


Keys			
	Item to be retained		Proposed Sign location
	Item to be removed by Main Contractor		Item to be removed by Signage Contractor
Signage contractor notes		Main contractor notes	

Proposed building signs	
BS2	Sainsbury's letters
BS3	Sainsbury's letters
BS28 2	Argos Flex sign
BS29 2	Argos Flex sign




Keys	
	Item to be retained
	Item to be removed by Main Contractor
	Proposed Sign location
	Item to be removed by Signage Contractor
Signage contractor notes	
Main contractor notes	

Proposed building signs	
BS2	Sainsbury's letters
BS3	Sainsbury's letters
BS28 2	Argos Flex sign
BS29 2	Argos Flex sign

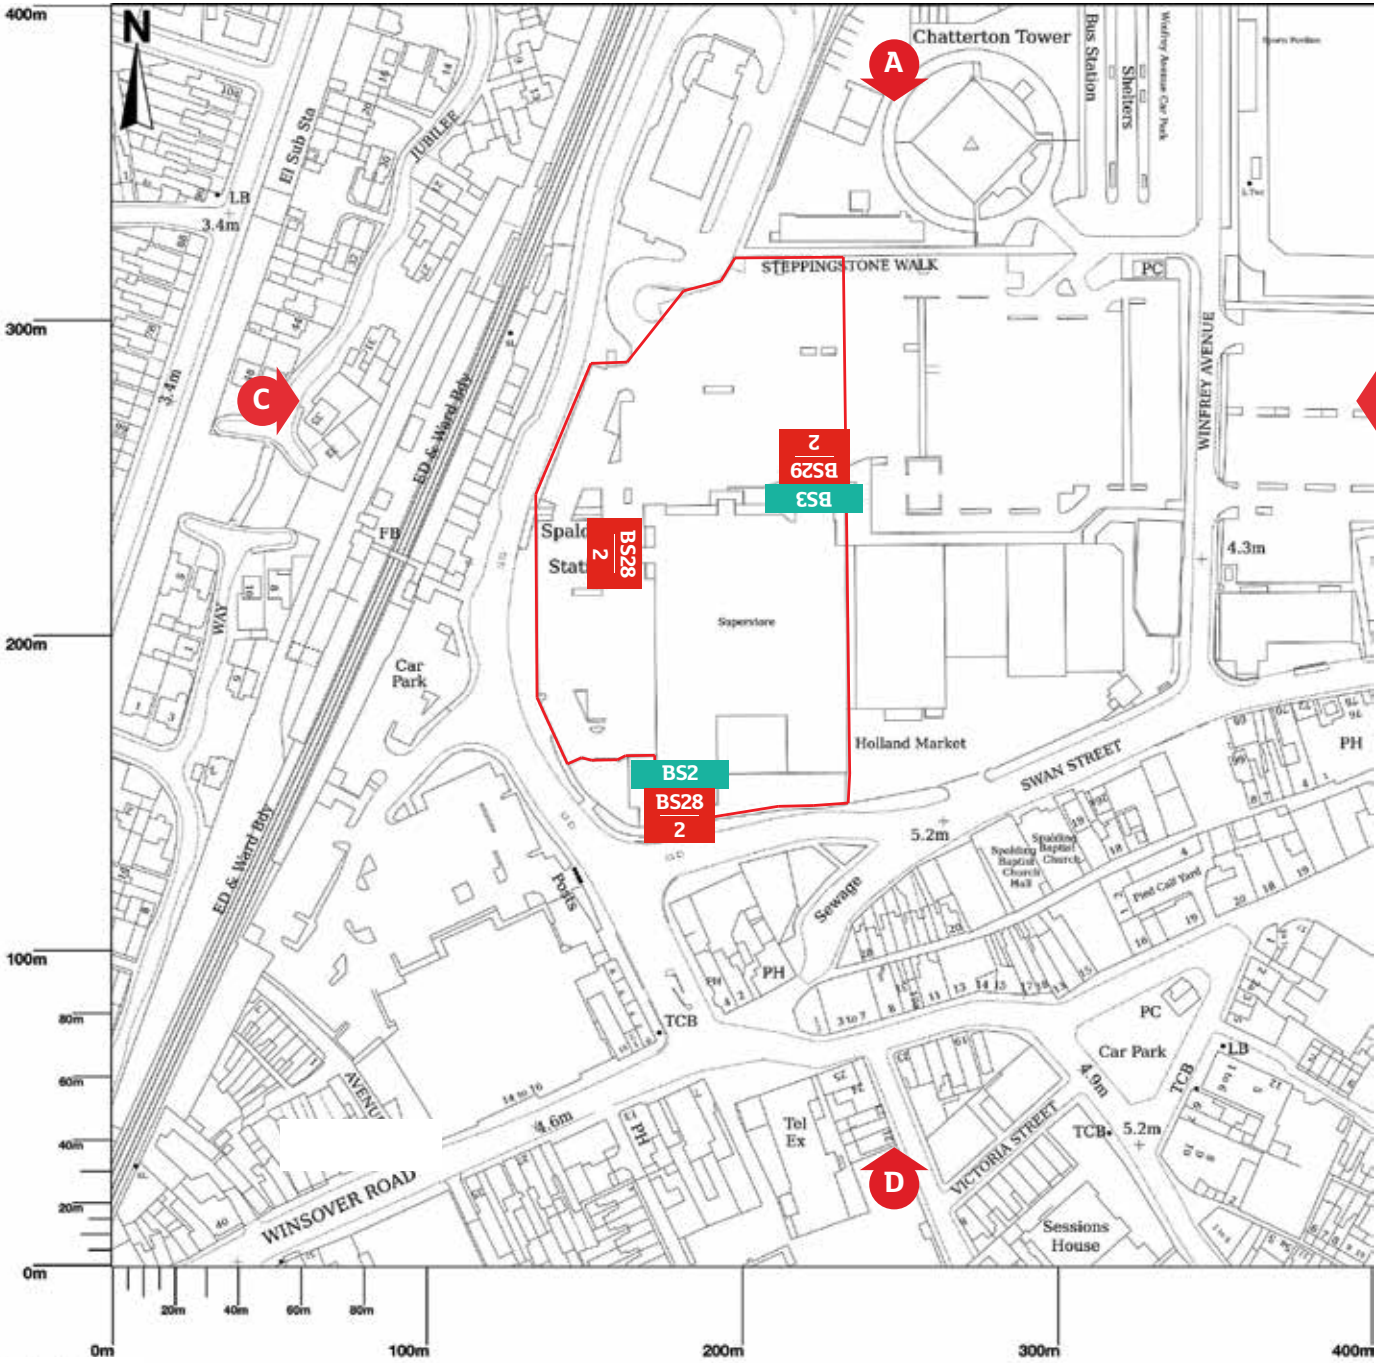


OS map
Scale 1:2500

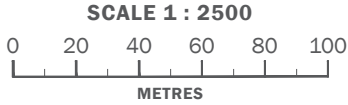

Elevation A, B

NO SIGNAGE TO BE MANUFACTURED UNTIL ALL PROPOSED SIGNAGE
DIMENSION, POSITIONING AND MANUFACTURING ARTWORK (INCLUDING
OFFERS & TRADING HOURS) ARE APPROVED BY SDDM


Keys			
	Item to be retained		Proposed Sign location
	Item to be removed by Main Contractor		Item to be removed by Signage Contractor
Signage contractor notes		Main contractor notes	

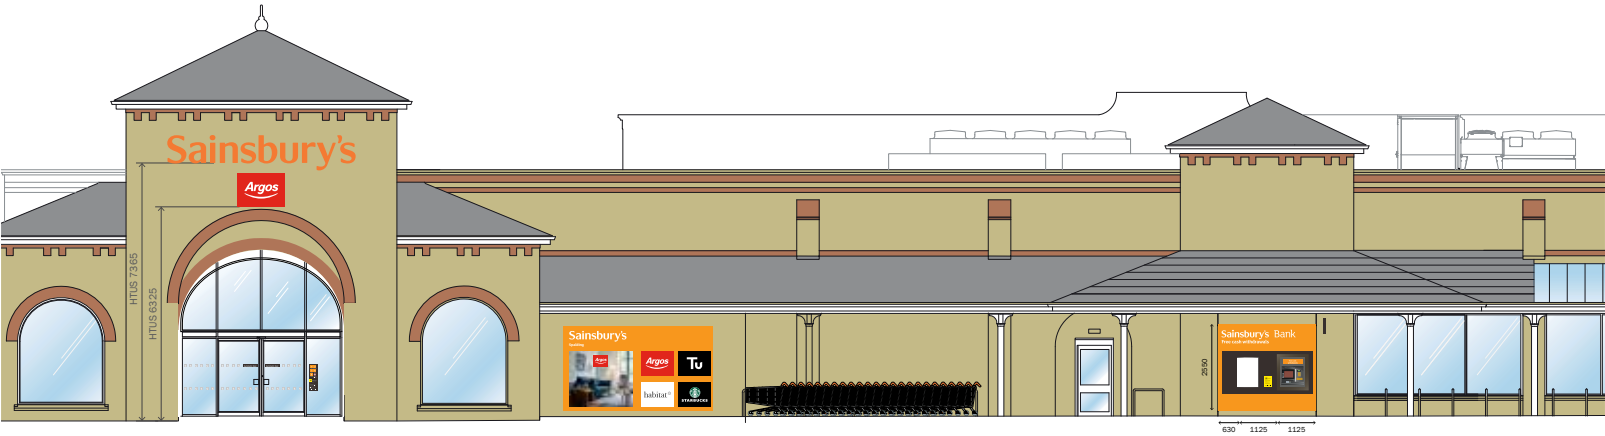

Elevation A
Scale NTS



Elevation B
Scale NTS

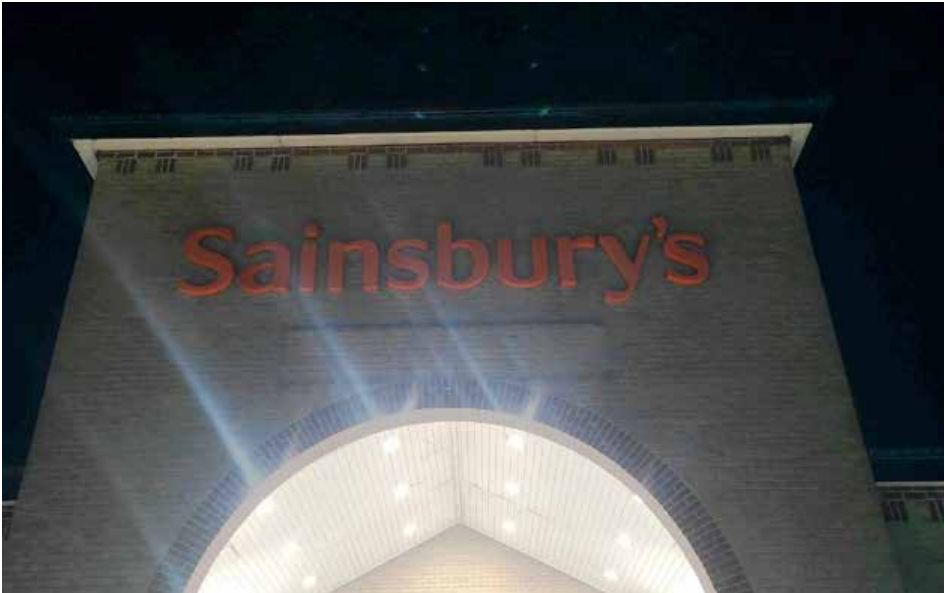

Existing Views

Elevation C , D

NO SIGNAGE TO BE MANUFACTURED UNTIL ALL PROPOSED SIGNAGE DIMENSION, POSITIONING AND MANUFACTURING ARTWORK (INCLUDING OFFERS & TRADING HOURS) ARE APPROVED BY SDDM

Keys	
	Item to be retained
	Item to be removed by Main Contractor
	Proposed Sign location
	Item to be removed by Signage Contractor
Signage contractor notes	
Main contractor notes	



Elevation C
Scale NTS

Elevation D
Scale NTS



Existing Views


Keys			
	Item to be retained		Proposed Sign location
	Item to be removed by Main Contractor		Item to be removed by Signage Contractor
Signage contractor notes		Main contractor notes	



Existing View



Proposed View

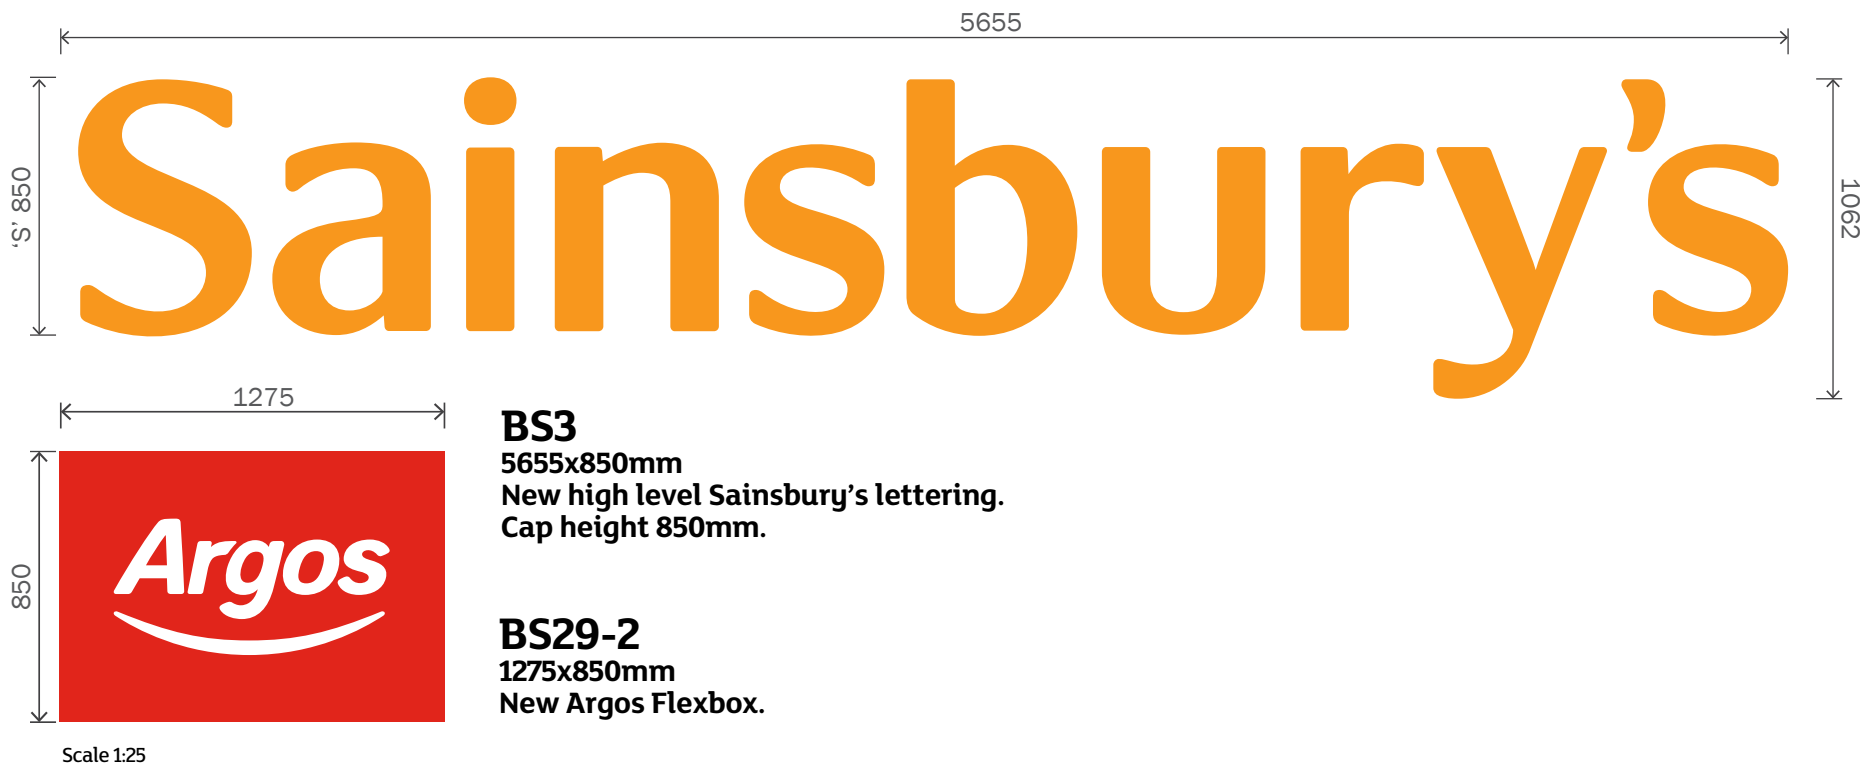

Elevation A - Scale NTS

Argos Flex sign

NO SIGNAGE TO BE MANUFACTURED UNTIL ALL PROPOSED SIGNAGE
DIMENSION, POSITIONING AND MANUFACTURING ARTWORK (INCLUDING
OFFERS & TRADING HOURS) ARE APPROVED BY SDDM


Keys			
	Item to be retained		Proposed Sign location
	Item to be removed by Main Contractor		Item to be removed by Signage Contractor
Signage contractor notes		Main contractor notes	



Elevation C - Existing View



Proposed View

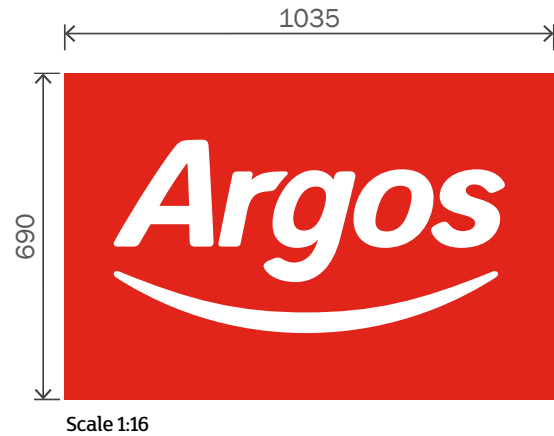

BS28-2
1035x690mm
2no New Argos Flexboxes.



Elevation C - Scale NTS



Elevation D - Scale NTS

High level lettering

NO SIGNAGE TO BE MANUFACTURED UNTIL ALL PROPOSED SIGNAGE
DIMENSION, POSITIONING AND MANUFACTURING ARTWORK (INCLUDING
OFFERS & TRADING HOURS) ARE APPROVED BY SDDM


Keys			
	Item to be retained		Proposed Sign location
	Item to be removed by Main Contractor		Item to be removed by Signage Contractor
Signage contractor notes		Main contractor notes	



Existing View



Proposed View

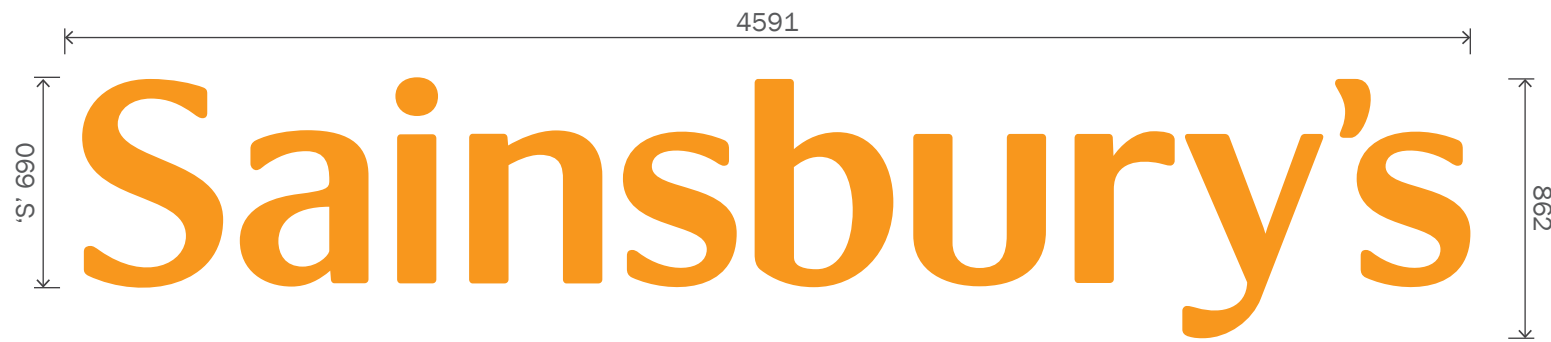

Scale 1:25

BS2
4591x862mm
New high level Sainsbury's lettering.
Cap height 690mm.




Elevation D - Scale NTS


Keys	
 Item to be retained	 Proposed Sign location
 Item to be removed by Main Contractor	 Item to be removed by Signage Contractor
Signage contractor notes	
Main contractor notes	



FRONT ELEVATION
SCALE 1:15

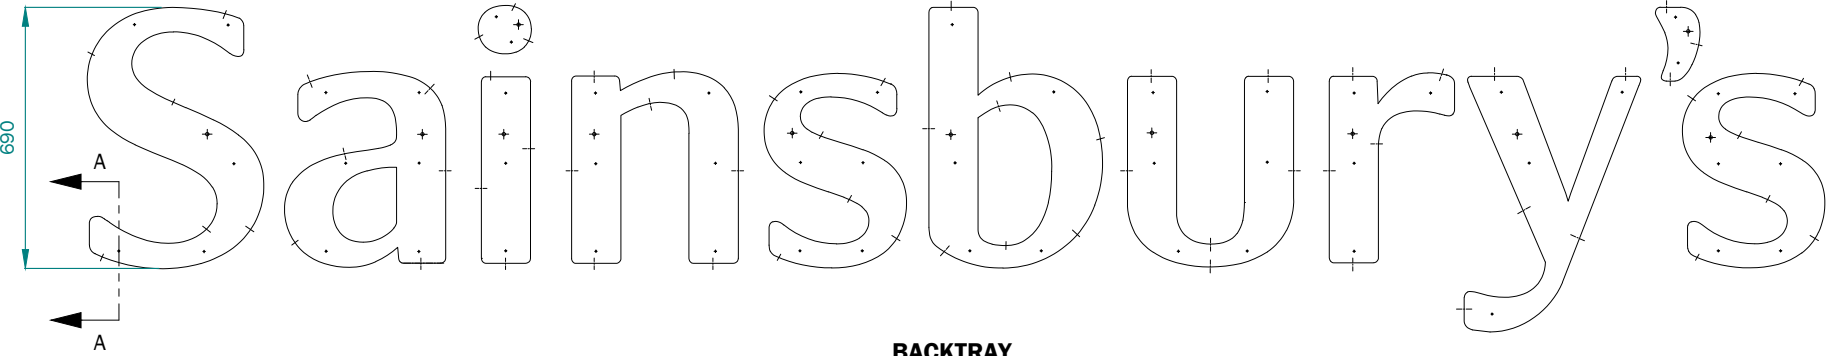

BACKTRAY
SCALE 1:20

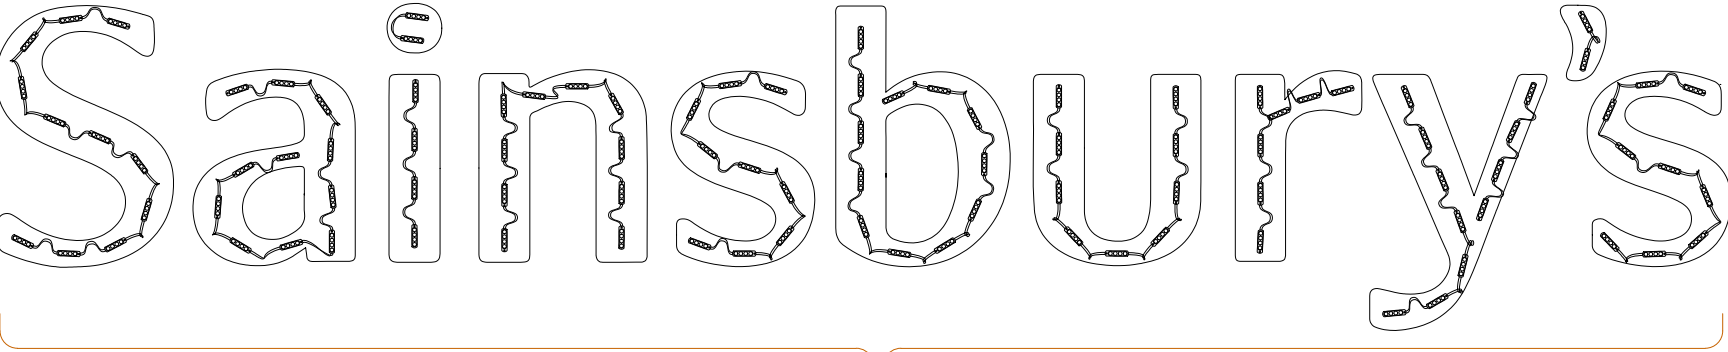


24V 100W DRIVER

LED LAYOUT
SCALE 1:20


Lighting assessment: Lighting not to exceed 600 candelas per m²
97 Modules: GE Lighting Solutions - Tetra miniMAX
24V Warm White 3200K - GEMM2432-W1
97 Total Modules - 33.8 Watts
1 Power Supply: GE Lighting Solutions - GEPS24-100U-GL

-  = Return Fixing
-  = Backtray Fixing
-  = Cable Holes

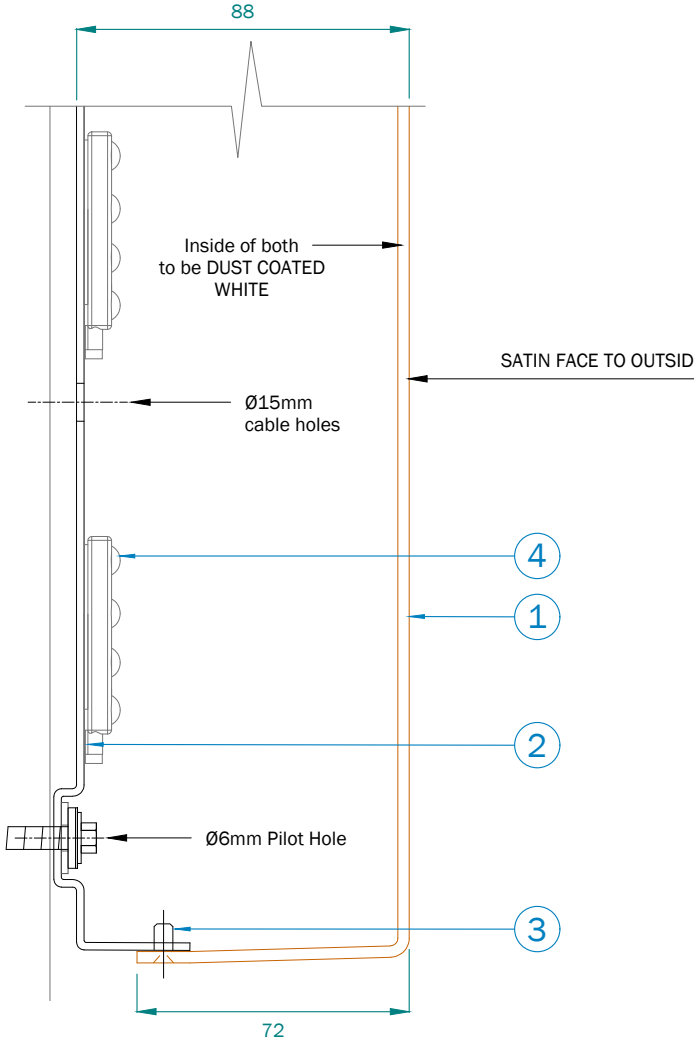


SECTION A-A
SCALE 1:2


Keys			
	Item to be retained		Proposed Sign location
	Item to be removed by Main Contractor		Item to be removed by Signage Contractor
Signage contractor notes		Main contractor notes	

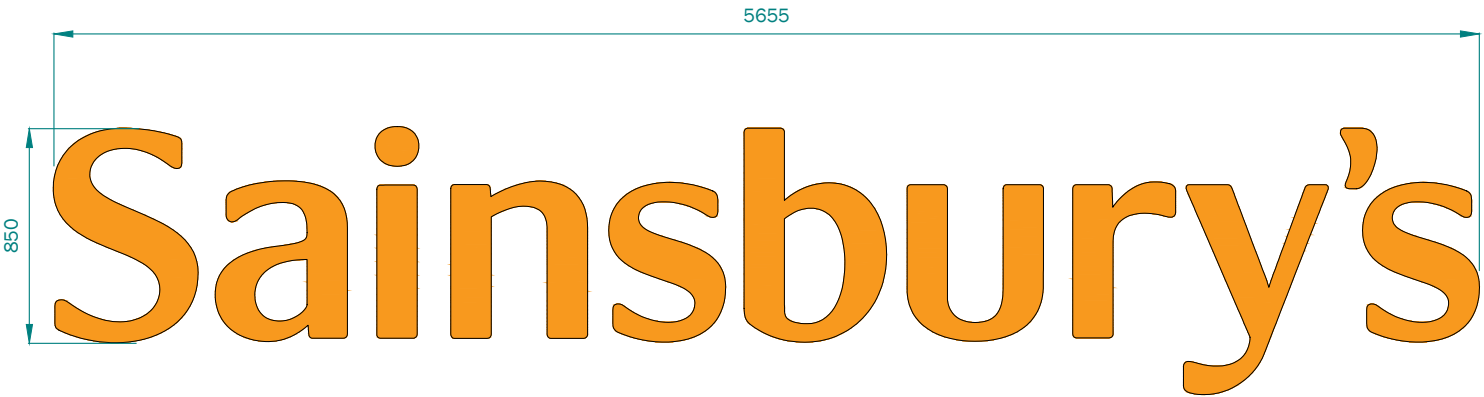

FRONT ELEVATION
SCALE 1:30

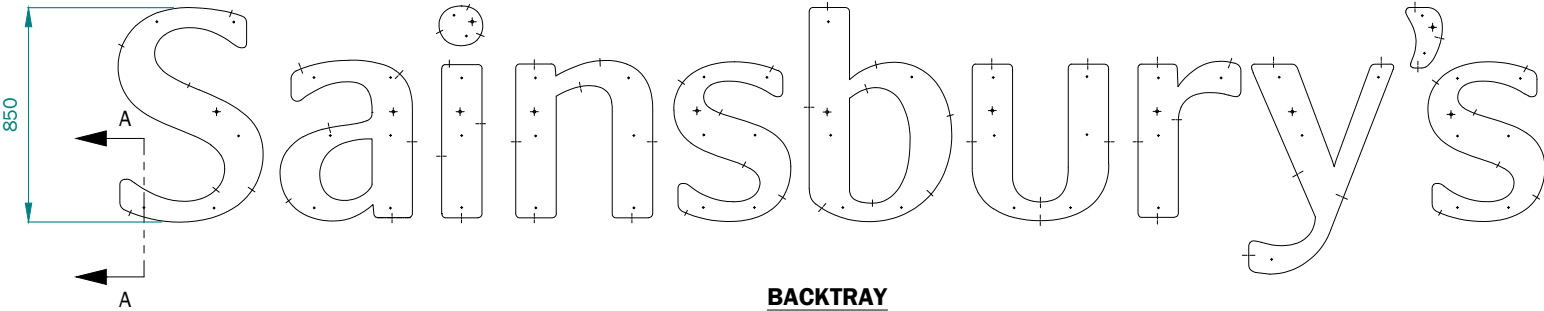


BACKTRAY
SCALE 1:30

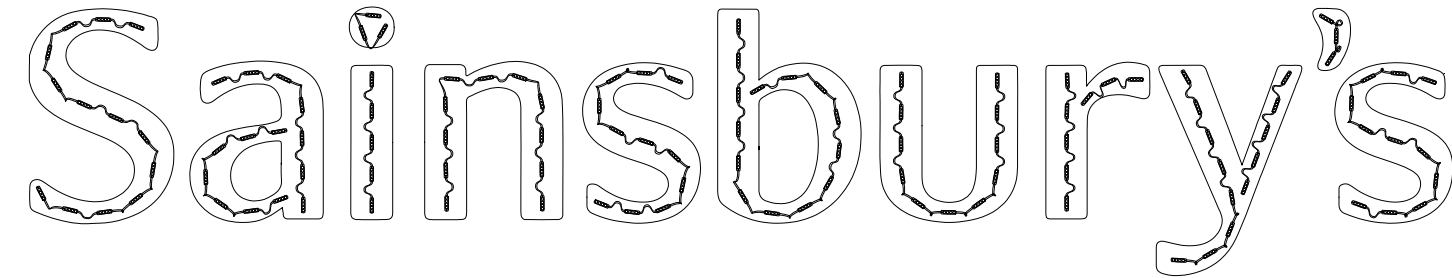

24V 100W DRIVER


LED LAYOUT
SCALE 1:30

Lighting assessment: Lighting not to exceed 600 candelas per m²
117 Modules: GE Lighting Solutions - Tetra miniMAX
24V Warm White 3200K - GEMM2432-W1
117 Total Modules - 40.7 Watts
1 Power Supply: GE Lighting Solutions - GEPS24-100U-GL

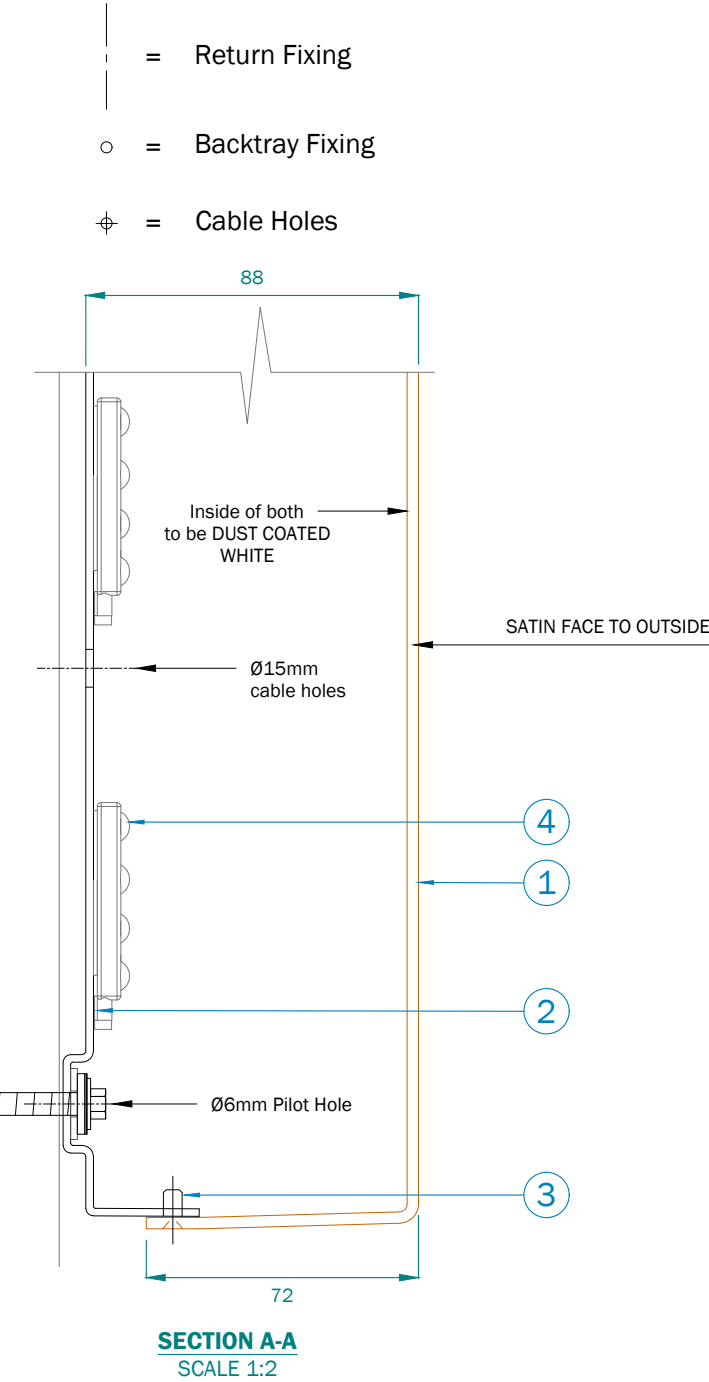

SECTION A-A
SCALE 1:2



Keys			
	Item to be retained		Proposed Sign location
	Item to be removed by Main Contractor		Item to be removed by Signage Contractor
Signage contractor notes		Main contractor notes	

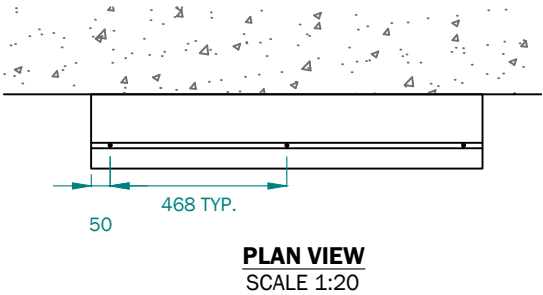


FRAME/TRIM POWDERCOATED RED RAL 3020 - 30%
GLOSS




AW-SAI-AR-BS28-2
FULLY ILLUMINATED

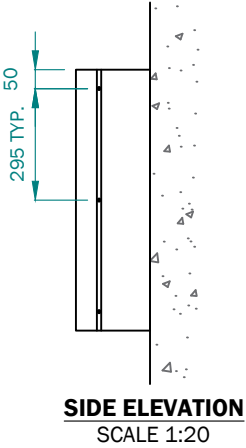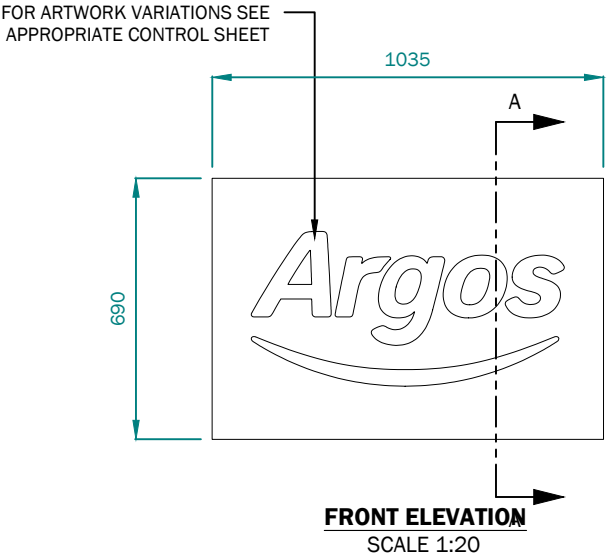


Keys			
	Item to be retained		Proposed Sign location
	Item to be removed by Main Contractor		Item to be removed by Signage Contractor
Signage contractor notes		Main contractor notes	

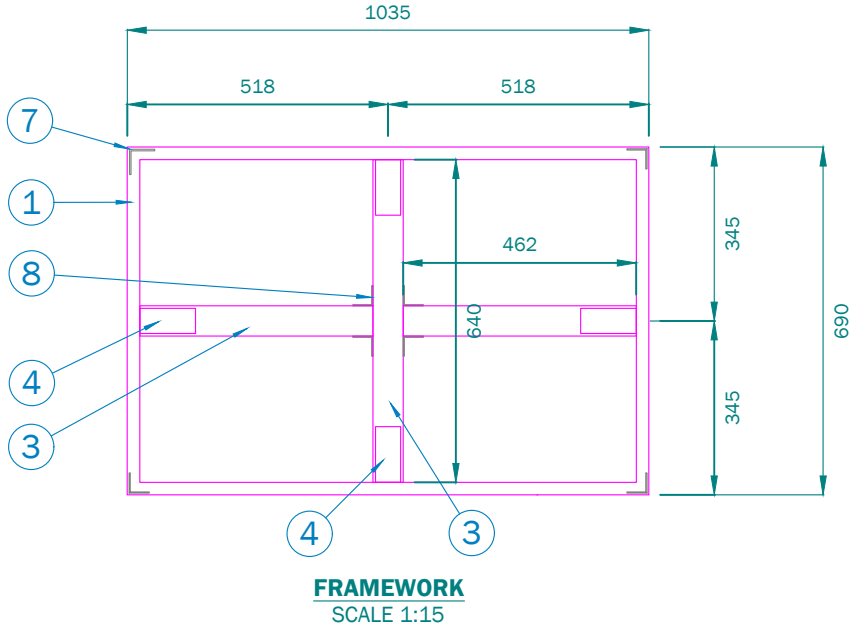

PART NO.	PART NAME	DESCRIPTION	QTY.	PART MASS (KG)	TOTAL MASS (KG)
1	FRAME	ECONOFLEX #7000 STANDARD BODY EXTRUSION - ETCHED AND POWDERCOATED - SILVER RAL 9006 OR RED RAL 3020 - 30% GLOSS - SEE GENERAL ARRANGEMENT PAGE FOR COLOUR REFERENCE	3.45M	2.498 kg/m	8.6
2	TRIM	ECONOFLEX #7200 POWDERCOATED - SILVER RAL 9006 OR RED RAL 3020 - 30% GLOSS - SEE GENERAL ARRANGEMENT PAGE FOR COLOUR REFERENCE	3.45M	0.32 kg/m	1.1
3	BACK SUPPORT	ECONOFLEX #9500	1.57M	0.717 kg/m	1.13
4	GUSSET	ECONOFLEX #7105	4	0.11	0.4
5	LOCKING PLATE	ECONOFLEX #7999	4	0.011	0.0
6	TENSION CLIP	ECONOFLEX #5360	25	0.0175	0.4
7	CORNER ANGLE	ECONOFLEX #7400	4	0.0895	0.4
8	ANGLE	50mm x 50mm x 4mm - FOLDED - 3103-H14 GRADE ALUMINUM - LENGTH = 10mm	4	0.0101	0.0
9	BACK PANEL	0.9mm - STUCCO ALUMINIUM	1	1.7	1.7
10	CARRIER PANEL	3mm - BUDGET ACM	1	1.45	1.5
11	LED MODULES	GE Tetra PowerMAX HO GEPMH2471-W1CS1 - 7100K - 24V	SEE PAGE 03	-	-
12	POWER SUPPLY	GEPS24-80U-GL - IP66 - POWER SUPPLY	SEE PAGE 03	-	-
13	FLEXFACE SKIN	DTS PRINTED FLEXFACE SKIN - VERSEIDAG - BACK LIGHT SUPREME SKIN- SEE GENERAL ARRANGEMENTS PAGE FOR GRAPHIC VARIANTS	1	0.5	0.5
TOTAL MASS (kg) INC. 10% FOS					17.45

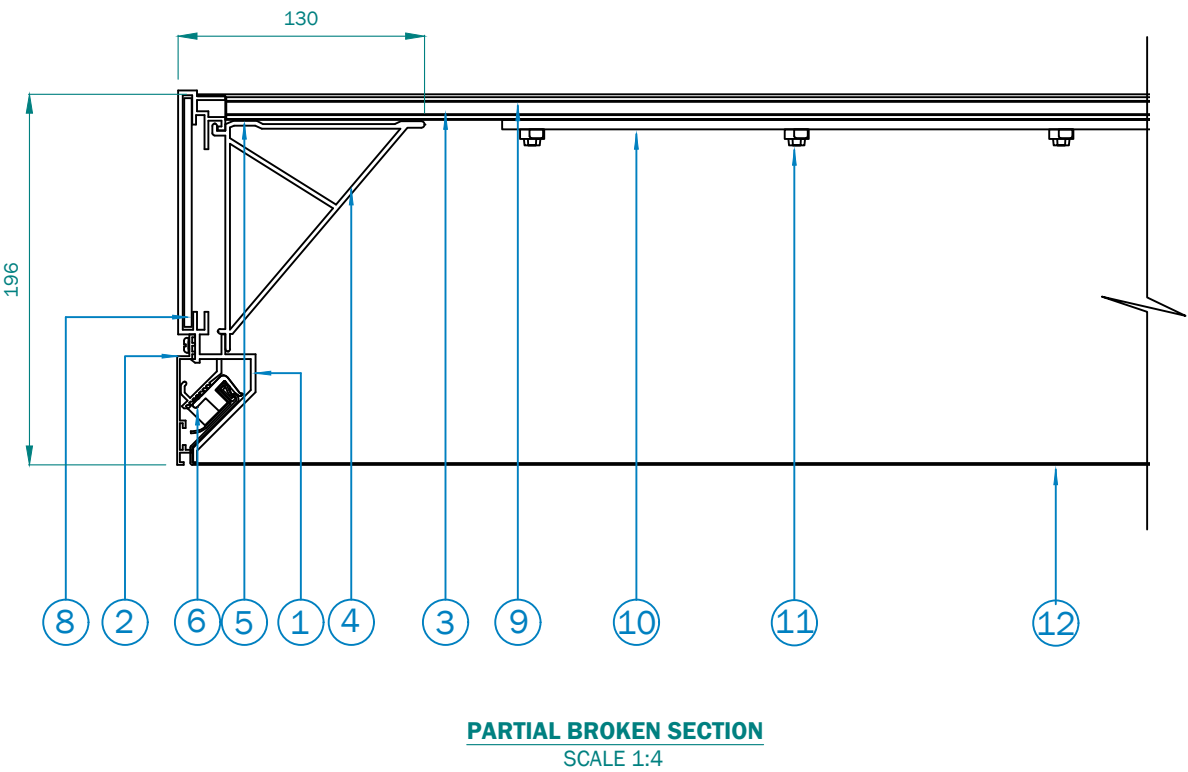


Keys			
	Item to be retained		Proposed Sign location
	Item to be removed by Main Contractor		Item to be removed by Signage Contractor
Signage contractor notes		Main contractor notes	

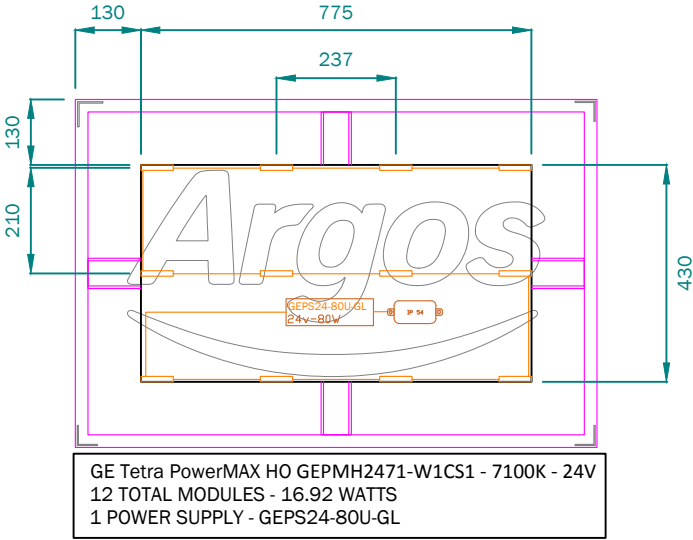


AW-SAI-AR-BS28-2
FULLY ILLUMINATED
SCALE 1:15

Lighting assessment: Lighting not to exceed 600 candelas per m²

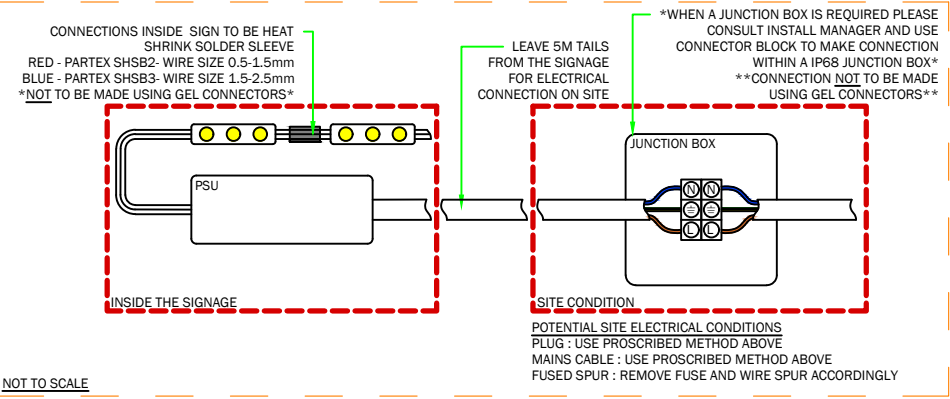



Keys			
	Item to be retained		Proposed Sign location
	Item to be removed by Main Contractor		Item to be removed by Signage Contractor
Signage contractor notes		Main contractor notes	

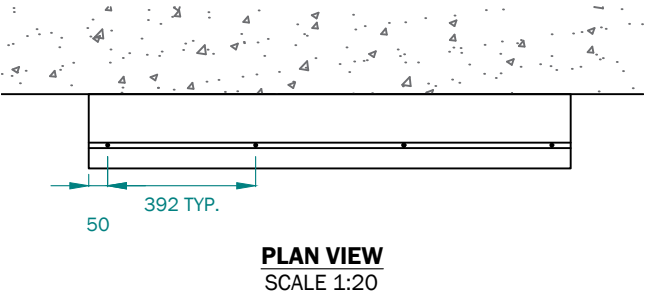

FRAME/TRIM POWDERCOATED RED RAL 3020 - 30%
GLOSS



AW-SAI-AR-BS29-2
FULLY ILLUMINATED

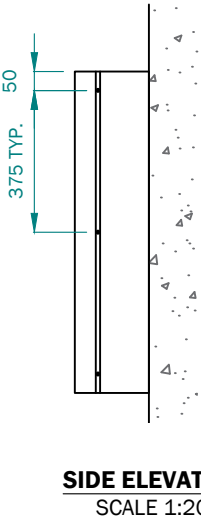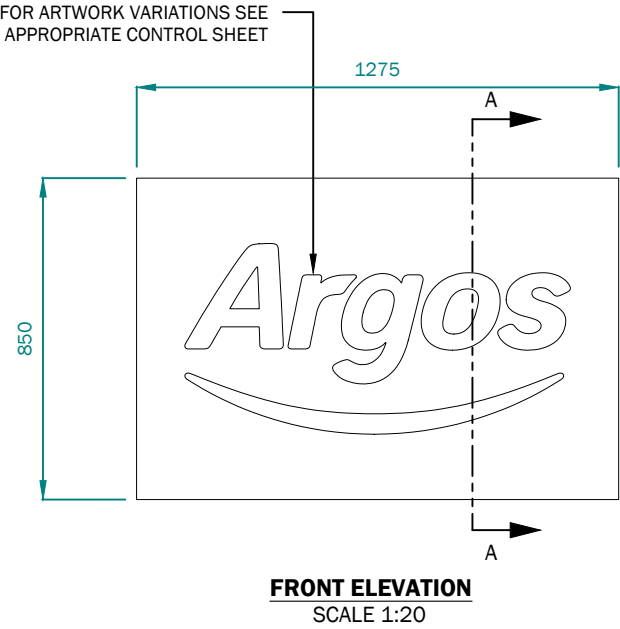

Keys

Item to be retained


Item to be removed by
Main Contractor

Proposed Sign location

Item to be removed by Signage
Contractor


Signage contractor notes

Main contractor notes

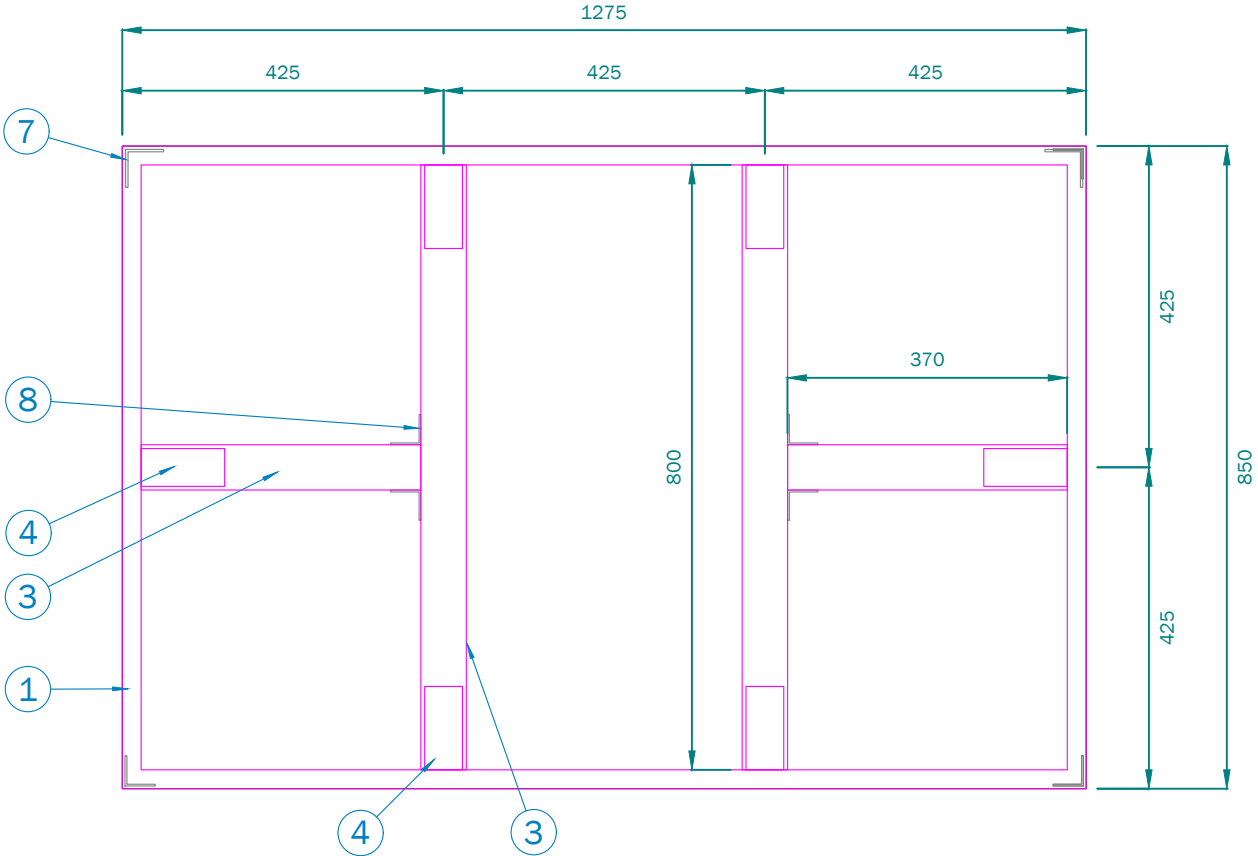

FRAMEWORK
SCALE 1:10

PART NO.	PART NAME	DESCRIPTION	QTY.	PART MASS (KG)	TOTAL MASS (KG)
1	FRAME	ECONOFLEX #7000 STANDARD BODY EXTRUSION - ETCHED AND POWDERCOATED - SILVER RAL 9006 OR RED RAL 3020 - 30% GLOSS - SEE GENERAL ARRANGEMENT PAGE FOR COLOUR REFERENCE	4.25M	2.498 kg/m	10.6
2	TRIM	ECONOFLEX #7200 POWDERCOATED - SILVER RAL 9006 OR RED RAL 3020 - 30% GLOSS - SEE GENERAL ARRANGEMENT PAGE FOR COLOUR REFERENCE	4.25M	0.32 kg/m	1.4
3	BACK SUPPORT	ECONOFLEX #9500	2.34M	0.717 kg/m	1.68
4	GUSSET	ECONOFLEX #7105	6	0.11	0.7
5	LOCKING PLATE	ECONOFLEX #7999	6	0.011	0.1
6	TENSION CLIP	ECONOFLEX #5360	30	0.0175	0.5
7	CORNER ANGLE	ECONOFLEX #7400	4	0.0895	0.4
8	ANGLE	50mm x 50mm x 4mm - FOLDED - 3103-H14 GRADE ALUMINUM - LENGTH = 10mm	4	0.0101	0.0
9	BACK PANEL	0.9mm - STUCCO ALUMINIUM	1	2.6	2.6
10	CARRIER PANEL	3mm - BUDGET ACM	1	2.6	2.6
11	LED MODULES	GE Tetra PowerMAX HO GEPMH2471-W1CS1 - 7100K - 24V	SEE PAGE 03	-	-
12	POWER SUPPLY	GEPS24-100U-GL - IP66 - POWER SUPPLY	SEE PAGE 03	-	-
13	FLEXFACE SKIN	DTS PRINTED FLEXFACE SKIN - VERSEIDAG - BACK LIGHT SUPREME SKIN- SEE GENERAL ARRANGEMENTS PAGE FOR GRAPHIC VARIANTS	1	0.7	0.7
TOTAL MASS (kg) INC. 10% FOS					23.33

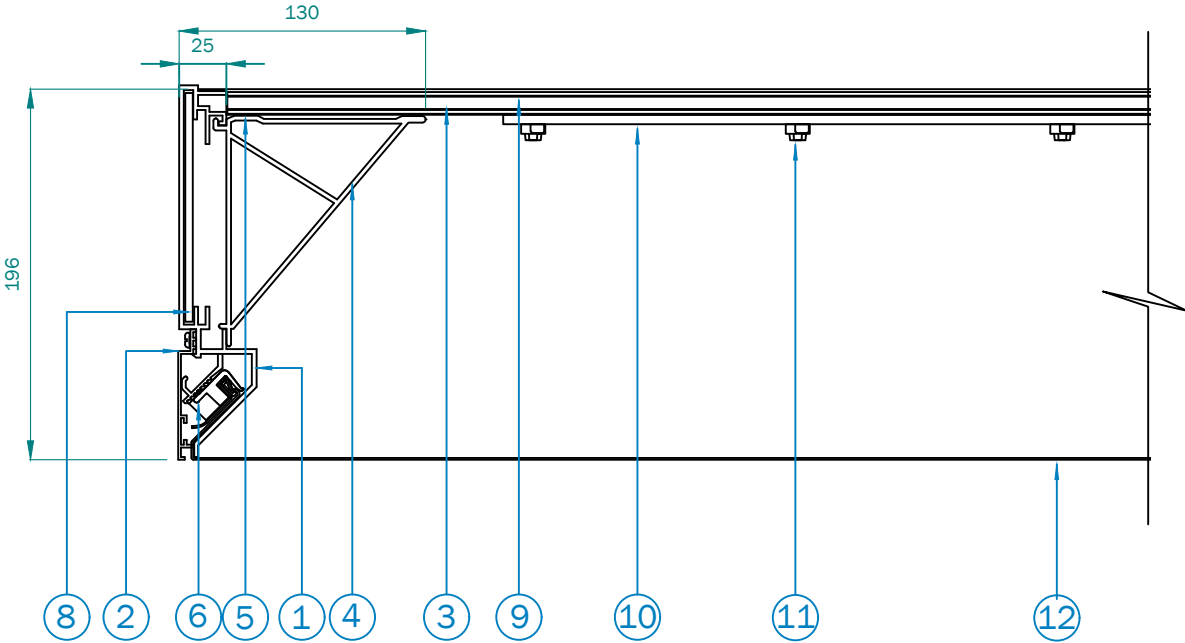

PARTIAL BROKEN SECTION
SCALE 1:4

BS29-2

**NO SIGNAGE TO BE MANUFACTURED UNTIL ALL PROPOSED SIGNAGE
DIMENSION, POSITIONING AND MANUFACTURING ARTWORK (INCLUDING
OFFERS & TRADING HOURS) ARE APPROVED BY SDDM**

Keys			
	Item to be retained		Proposed Sign location
	Item to be removed by Main Contractor		Item to be removed by Signage Contractor
Signage contractor notes		Main contractor notes	

