




FRONT

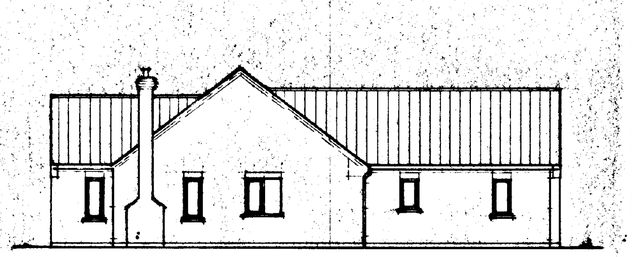


SIDE

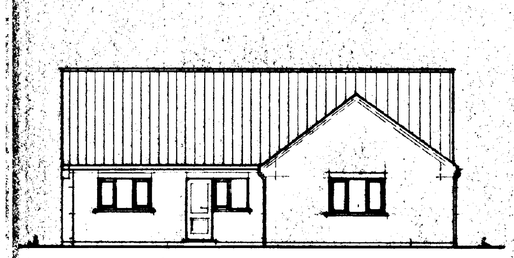

REAR

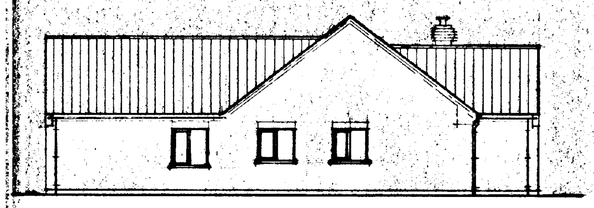

SIDE

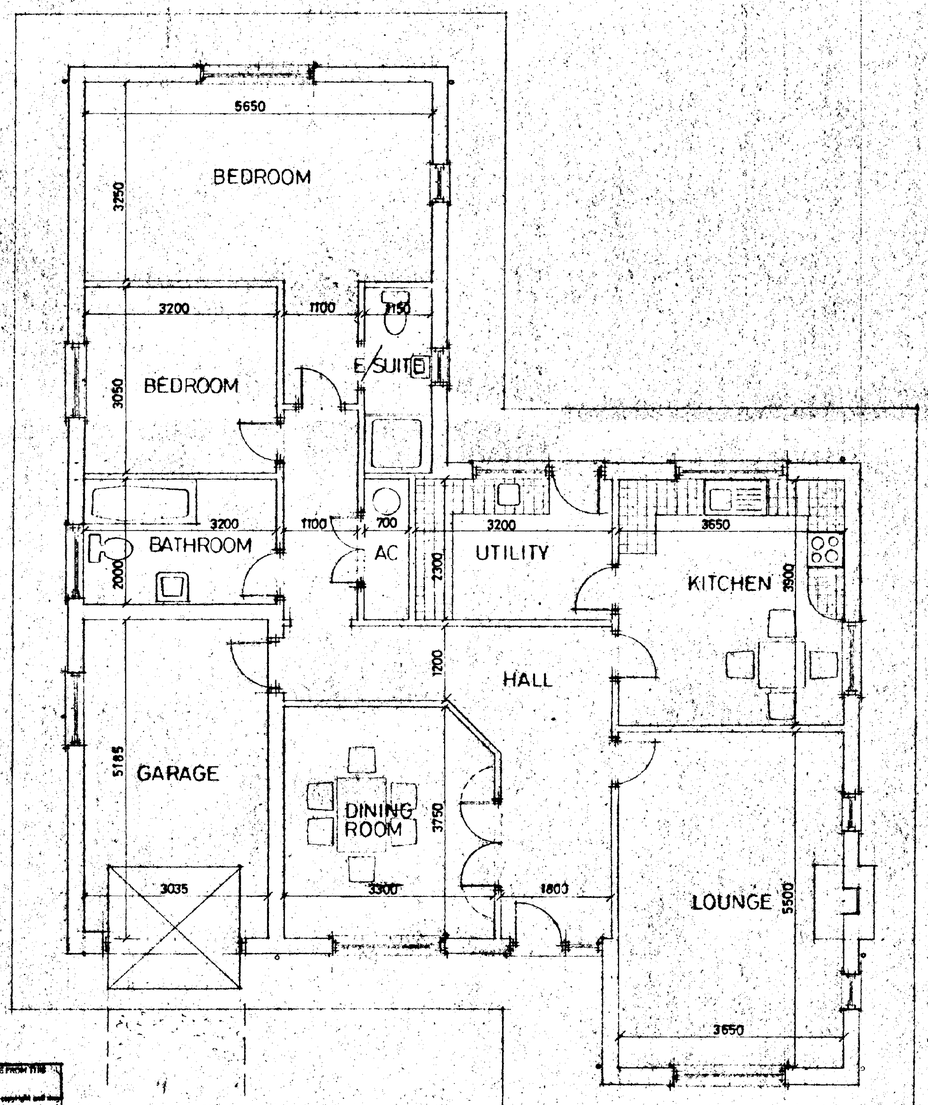

PLAN

DO NOT SCALE FROM THIS DRAWING

This drawing is copyright and may not be altered, traced, photocopied or used for any purpose other than that for which it is issued.
The General Contractor is to check all dimensions on site and report discrepancies to the Architect.
All details shown on this drawing including foundations are based upon typical site conditions relevant to the area. No responsibility can be accepted for abnormal conditions which may be encountered during construction unless reported to the Architect so that design amendments may be considered. Site soil surveys are recommended in respect of dimensions to establish specific site conditions before foundation work is undertaken.

SURVEY

SOUTH ... ND DC
HOUSING ... NNING
18 DEC 1995
Ref: 1216/95

DETERMINED PLAN

G. R. MERCHANT
LENG AMICE, FIWO,
ARCHITECTURAL, STRUCTURAL
& LAND DRAINAGE CONSULTANT
TEL: HOLBEACH (01406) 490800

PROJECT:
BUNGALOW & GARAGE
HORSESHOE ROAD
SPALDING


CLIENT:
MR & MRS R.J. LEE

SCALES: *1/50 1/100*
DATE: *DEC 1995*

G.R.MERCHANT.
DRAWING No.: *RJL.2*

REVISIONS:

0048 11947

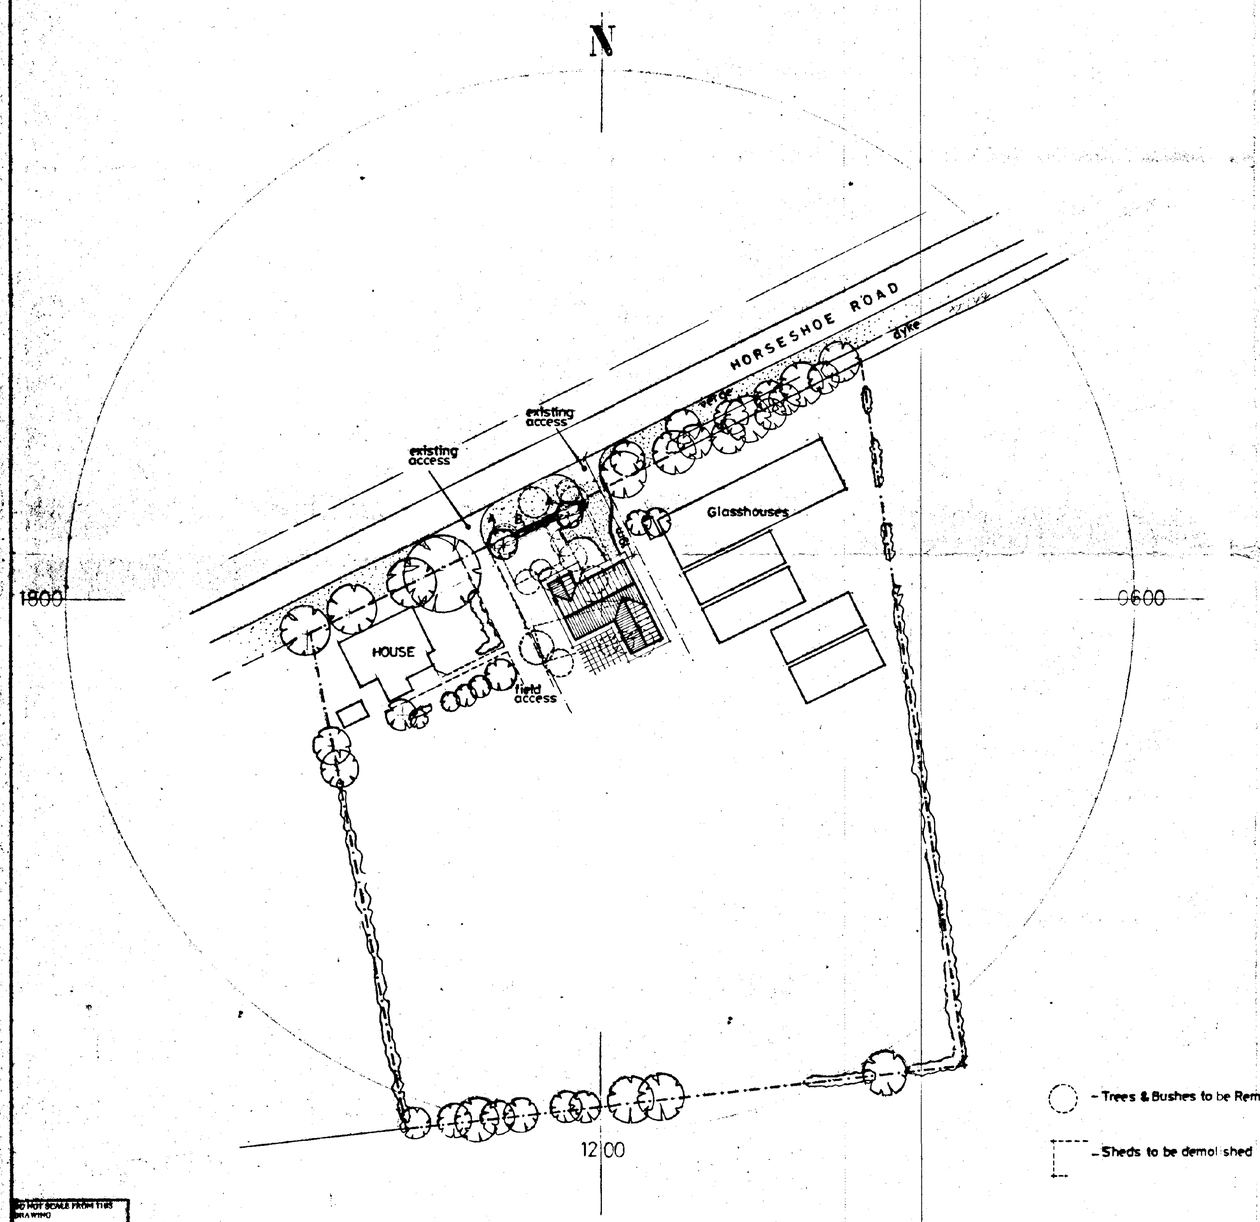

SITE PLAN
SCALE : 1/500


– Trees & Bushes to be Removed

– Sheds to be demolished

TREE PLANTING

A. RED HAWTHORN (CRATAEGUS PAULS SCARLET) HALF STANDARD

B. GREEN BEECH HEDGE (FAGUS SYLVATICA) @ 200 C/C

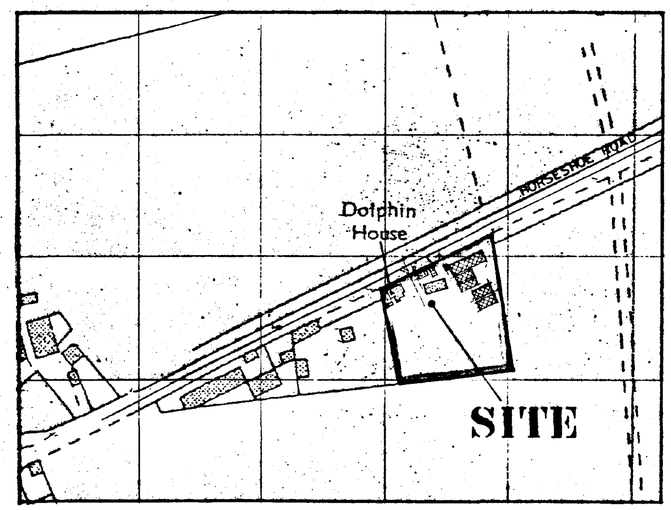

LOCATION PLAN
SCALE : 1/2500

SEPTIC TANK
Connect foul water drains to 600 gallon capacity 'Klargester' type septic tank constructed in accord with LA requirements. The sub-irrigational drainage system to the septic tank is to be determined by percolation test in accord with the provisions of clause 15.3.2. of BS-6297, 1983. The applicant is responsible for carrying out the tests and the minimum requirement is 30 metres of sub-irrigational drainage or such length as may be determined by the test, whichever is the greater. The Council recommend that septic tanks, cesspools and settlement tanks be sited at a minimum distance of 12 metres (40 feet) from dwellings. Applicants are further advised that during times of inclement weather, the ground water level rises accordingly. It is essential that drainage falls to the septic tank are kept to the minimum, say 1 in 70, and the tank particularly the bottle type, is modified by reducing its neck length by cutting to ensure that both inlet and outlet are maintained above ground water level. Applicants are reminded that the consent of National Rivers Authority must be sought under the provisions of Schedule 12 of the Water Act 1989 for permission to discharge sewage effluent into the land. National Rivers Authority do not permit septic tank soakaway systems to be situated within 10 metres of any watercourse or to discharge effluent directly or indirectly into an aquifer.
SHOULD THE RESULTS OF THE PERCOLATION TEST PROVE TO BE UNSATISFACTORY FOR SEPTIC TANK DRAINAGE DUE TO IMPERVIOUS SOIL CONDITIONS SUCH AS CLAY, THEN A CESSPOOL OF 10,000 LITRES, (4000 GALLONS) CAPACITY, OR MINI-PACKAGED TREATMENT PLANT MUST BE USED.

HOL… …DC …NING
16 DEC 1995
Ref: 1216/95

G. R. MERCHANT
I.ENG AMICE, FIWO,
ARCHITECTURAL, STRUCTURAL
& LAND DRAINAGE CONSULTANT
TEL: HOLBEACH (01406) 490800

PROJECT:
BUNGALOW & GARAGE
HORSESHOE ROAD
SPALDING

CLIENT:
MR & MRS R.J. LEE

SCALES:	DATE:
AS INDICATED	*DEC 1995*
G.R.MERCHANT.	DRAWING No.: *RJL.1*

REVISIONS:

DO NOT SCALE FROM THIS DRAWING
This drawing is copyright and shall not be altered, traced, photographed or used for any purpose other than that for which it is issued.
The General Contractor is to check all dimensions on site and report discrepancies to the Architect.
All details shown on this drawing including foundations are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions which may be discovered during construction unless reported to the Architect so that design amendments may be considered. Site soil surveys are recommended in respect of deviations to establish specific site conditions before foundation work is undertaken.
SUMMIT
6046-11947