REAR ELEVATION

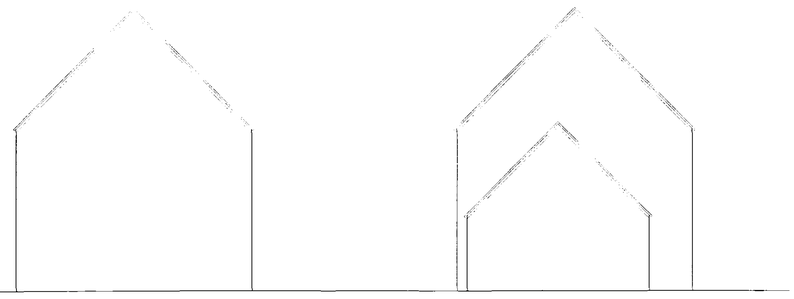

END ELEVATION(6)

END ELEVATION(8)

FRONT ELEVATION

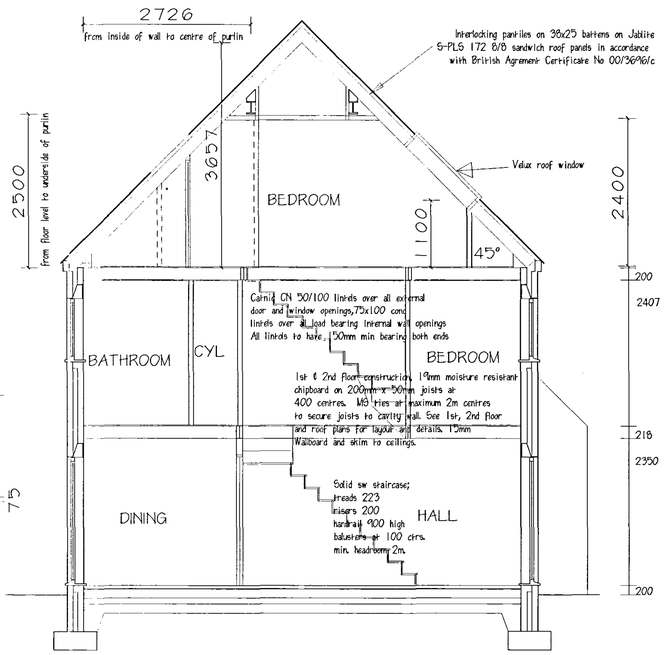

SECTION SYCAMORE

100mm outer facing brickwork,85mm cavity
filled with bonded polystirene beads,100mm
Celcon standard blocks, 15mm plaster.
All cavities closed at top.
Dancor vertical cavity closer as insulation
and DPM

Felt DPM min 150mm above paving
level lapped to DPM under slab.
Floor Finish on 50mm sand cement screed
on 150mm reinforced concrete slab on 1200g
polythene DPM on sand blinded
hardcore min 150mm thick.100mm expanded
polystyrene insulation 225x700mm concrete
strip foundationsmin 1000mm deep or on
suitable load bearing stratum. Foundations
backfilled with hardcore.

Walls below GFL. 100mm brickwork with 85mm weak
concrete filled cavity and 100 dense concrete block
inner skin,450mm wide dpm bonded to 1200 polythene
dpm.

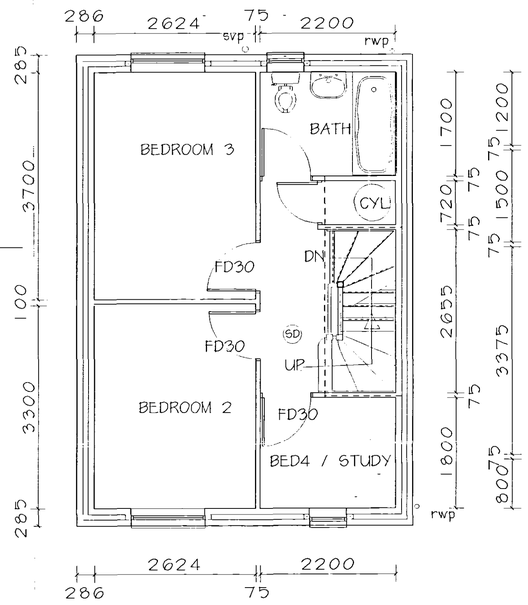

FIRST FLOOR

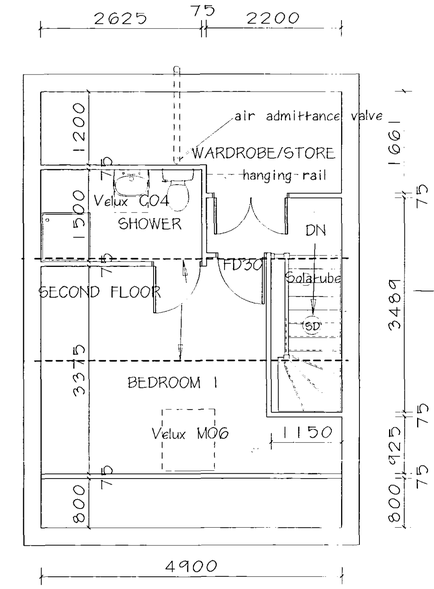

SECOND FLOOR

GROUND FLOOR

21 NOV 2005
1600/05
DETERMINED
PLAN

M. PARKER
& SONS LIMITED
BUILDERS & CONTRACTORS
ST. JOHNS RD SPALDING LINCS PE11 1JX
FAX. 01775 762171 TEL. 01775 724777

PROPOSED RESIDENTIAL DEVELOPMENT
ST. JOHNS ROAD
SPALDING
TYPE -SYCAMORE
PLOTS 6, 7 & 8

SCALES 1:100 & 1:50
DRG. NO. SJRS/07 DATE 10/05