

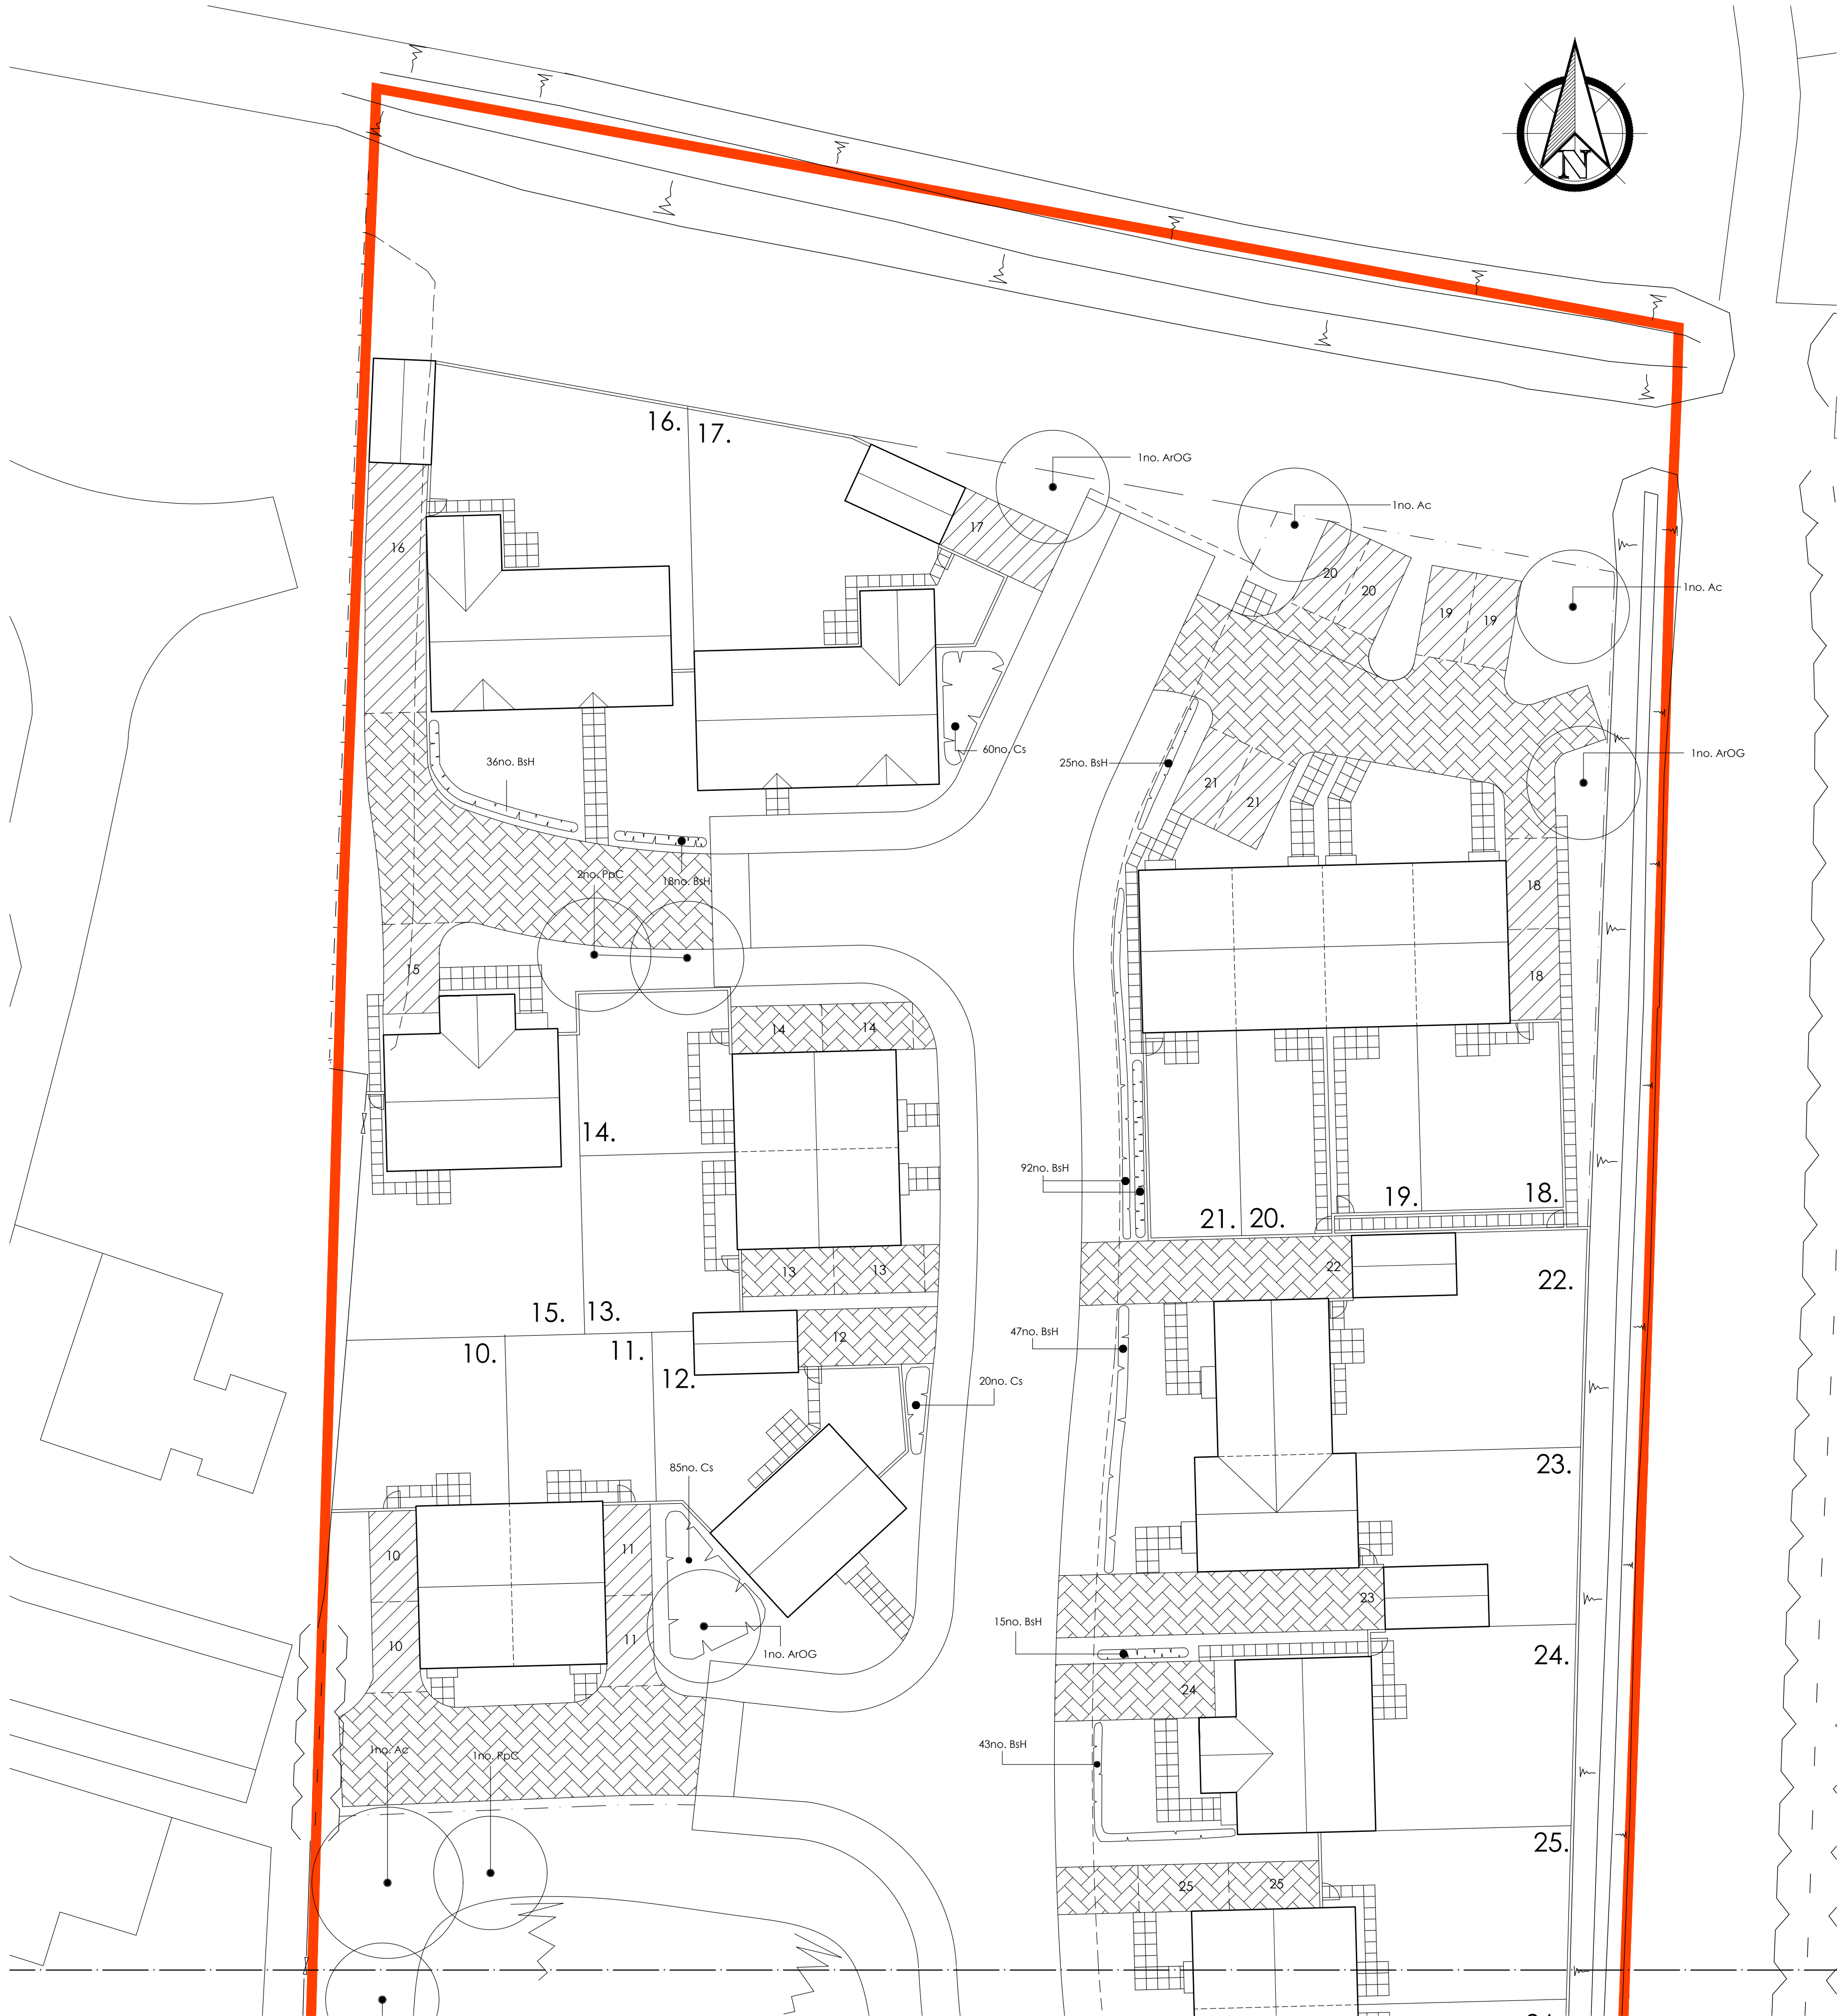



KEY




Existing tree/ landscaping to be retained




Proposed Tree




Proposed hedge




Proposed shrub planting




Specimen Shrub




600mm x 600mm buff riven paving slabs to rear



2 x 600mm x 600mm buff riven paving slabs to front




Patios



Natural Grey Block Paving



Charcoal Block Paving



Bin Stores

TREES


Species	Girth	Type	Overall Height	Root Condition	No.
ArOG	Acer rubrum 'October Glory'	12-14	x2	400-500	Bare Root 3
PpC	Prunus padus 'Colorata'	12-14	x2	400-500	Bare Root 3
Ac	Alnus cordata	12-14	x2	400-500	Root balled 3

HEDGE PLANTING

	Species	No. Breaks	Type	Overall Height	Root Condition	Plant Spacing	No.
BsH	Buxus sempervirens "Handsworthensis"	Multi	3L	15 - 30	Container	300mm c/c	276

GENERAL PLANTING

	Species	No. Breaks	Type	Overall Height	Root Condition	No.
Cs	Ceanothus 'skylark'	5 - 7	3L	45 - 60	Container	165



Do not scale directly from this drawing. All discrepancies are to be brought to the attention of the below office.

The copyright to this drawing is owned by Studio 11 Architecture.

Specification Notes:

- General Notes**
 - All planting and seeding to be carried out to BS 3936.
- Tree Planting**
 - Excavate tree pits to the following sizes:
 - Semi mature trees - 2100 x 2100 x 900mm depth
 - Extra heavy standard trees - 1500 x 1500 x 900mm depth
 - Heavy standard trees - 1500 x 1500 x 900mm depth
 - Standard trees - 900 x 900 x 900mm depth
 - Retain topsoil for re-use and remove subsoil from site to designated subsoil heaps.
 - Backfill trees with 80 litres of tree planting compost incorporated into topsoil.
 - Tree support - Semi-mature, Extra heavy standard and Heavy standard trees to be supported by means of underground guying. Rootballed standard trees to be double staked and bareroot standard trees to be single staked. All trees to be secured to tree stakes with appropriate tree ties and spacers.
 - Mulch trees to 75mm depth with 'Bark Nuggets' over area of tree pit.
 - Check stakes, ties and spacers regularly to prevent damage to tree trunks and remove when trees are judged to be well established and self supporting.
- Hedge Planting**
 - Cultivate 500mm wide strip 300mm deep and plant in a single row unless otherwise stated at the spacings specified in the plant schedule.
- Groundcover and Shrub Planting**
 - Cultivate all shrub planting areas to a depth of 300mm and plant shrubs in positions shown.
 - Mulch shrub beds with 75mm 'Bark Nuggets'.
 - Maintain all planting areas in a weed free condition by appropriate herbicide treatment as necessary until ground is covered by new planting. Hand weed tall weeds as necessary and maintain a tidy appearance.
- Grass Seeded Areas**
 - Cultivate to a depth of 150mm and prepare ground in accordance with specification. Sow seed mix Johnsons's 'J4' grass seed mix at a rate of 25g/sq.m.

E	01.05.2019	JMG	Footpath position on Station Road revised at Highway request. Proposed hedging amended to suit. Plot 3 private footpath extended to adaptable footpath. Plot 16 & 17 revised.
D	09.01.2019	JMG	Landscaping amended.
C	25.07.2018	BCP	Soft Landscaping around Plot 17 amended.
B	03.07.2018	EG	Turning head amended north of the site. Soft and hard Landscaping updated to suit.
A	21.05.2018	EG	Housetypes on site layout updated and landscaping amended.
REVISION	DATE	DRAWN	DESCRIPTION



THE BOATHOUSE, HARBOUR SQUARE,
NENE PARADE, WISBECH,
CAMBRIDGESHIRE, PE13 3BH

T: 01945 467339
E: design@studio11architecture.co.uk
W: www.studio11architecture.co.uk

CLIENT Seagate Homes Ltd

PROJECT Residential development off Station Road, Surfleet

DRAWING Landscaping Details - 1 of 2

DRAWN	PROJECT DESIGNER	PROJECT DIRECTOR
BCP	KB	KB
DATE	SCALE	PAPER SIZE
27.04.2018	1:200	A1

DRAWING NUMBER 428.LD.01

Working in partnership with Ralph Charman Associates & Eleven Consultants

See Drawing 428.LD.02