

Flood Map centred on TF47177 21844 - created December 2018 [Ref: CCN-2018-110730]



Scale 1:10,000



Legend

- Main River
- Raised Defences
- Flood Storage Areas
- Area at Risk of Flooding from Rivers or The Sea
- Extreme Flood Outline


Dark blue shows the area that could be affected by flooding, either from rivers or the sea, if there were no flood defences. This area could be flooded:

- from the sea by a flood that has a 0.5% (1 in 200) or greater chance of happening each year.
- or from a river by a flood that has a 1% (1 in 100) or greater chance of happening each year.


Light blue shows the extent of the Extreme Flood Outline, which represents the extent of a flood event with a 0.1% chance of occurring in any year, or the highest recorded historic extent if greater.

These two colours show the extent of the natural floodplain if there were no flood defences or certain other manmade structures and channel improvements. Sites outside the two extents, but behind raised defences, may be affected by flooding if the defences are overtopped or fail.

Created by the Partnerships and Strategic Overview Team, Kettering

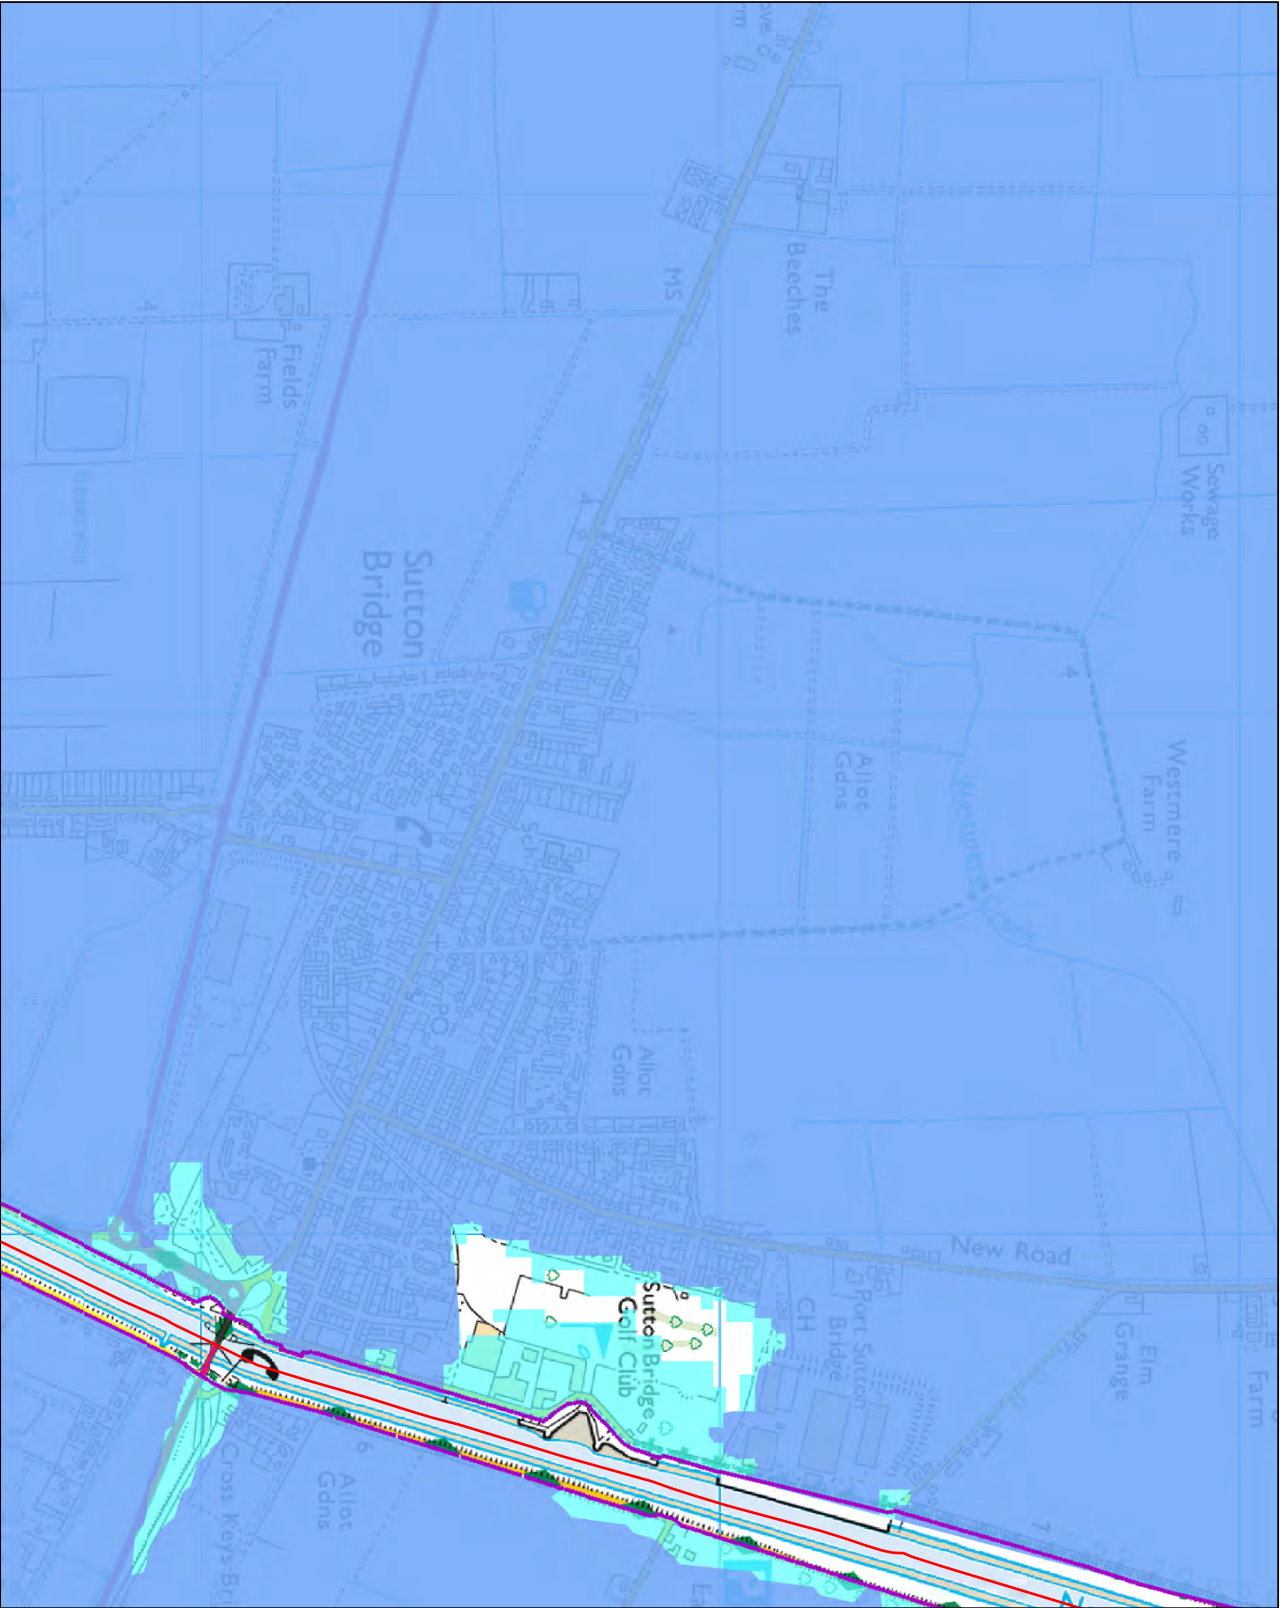

Historic Flood Map centred on TF47177 21844 - created December 2018 [Ref: CCN-2018-110730]

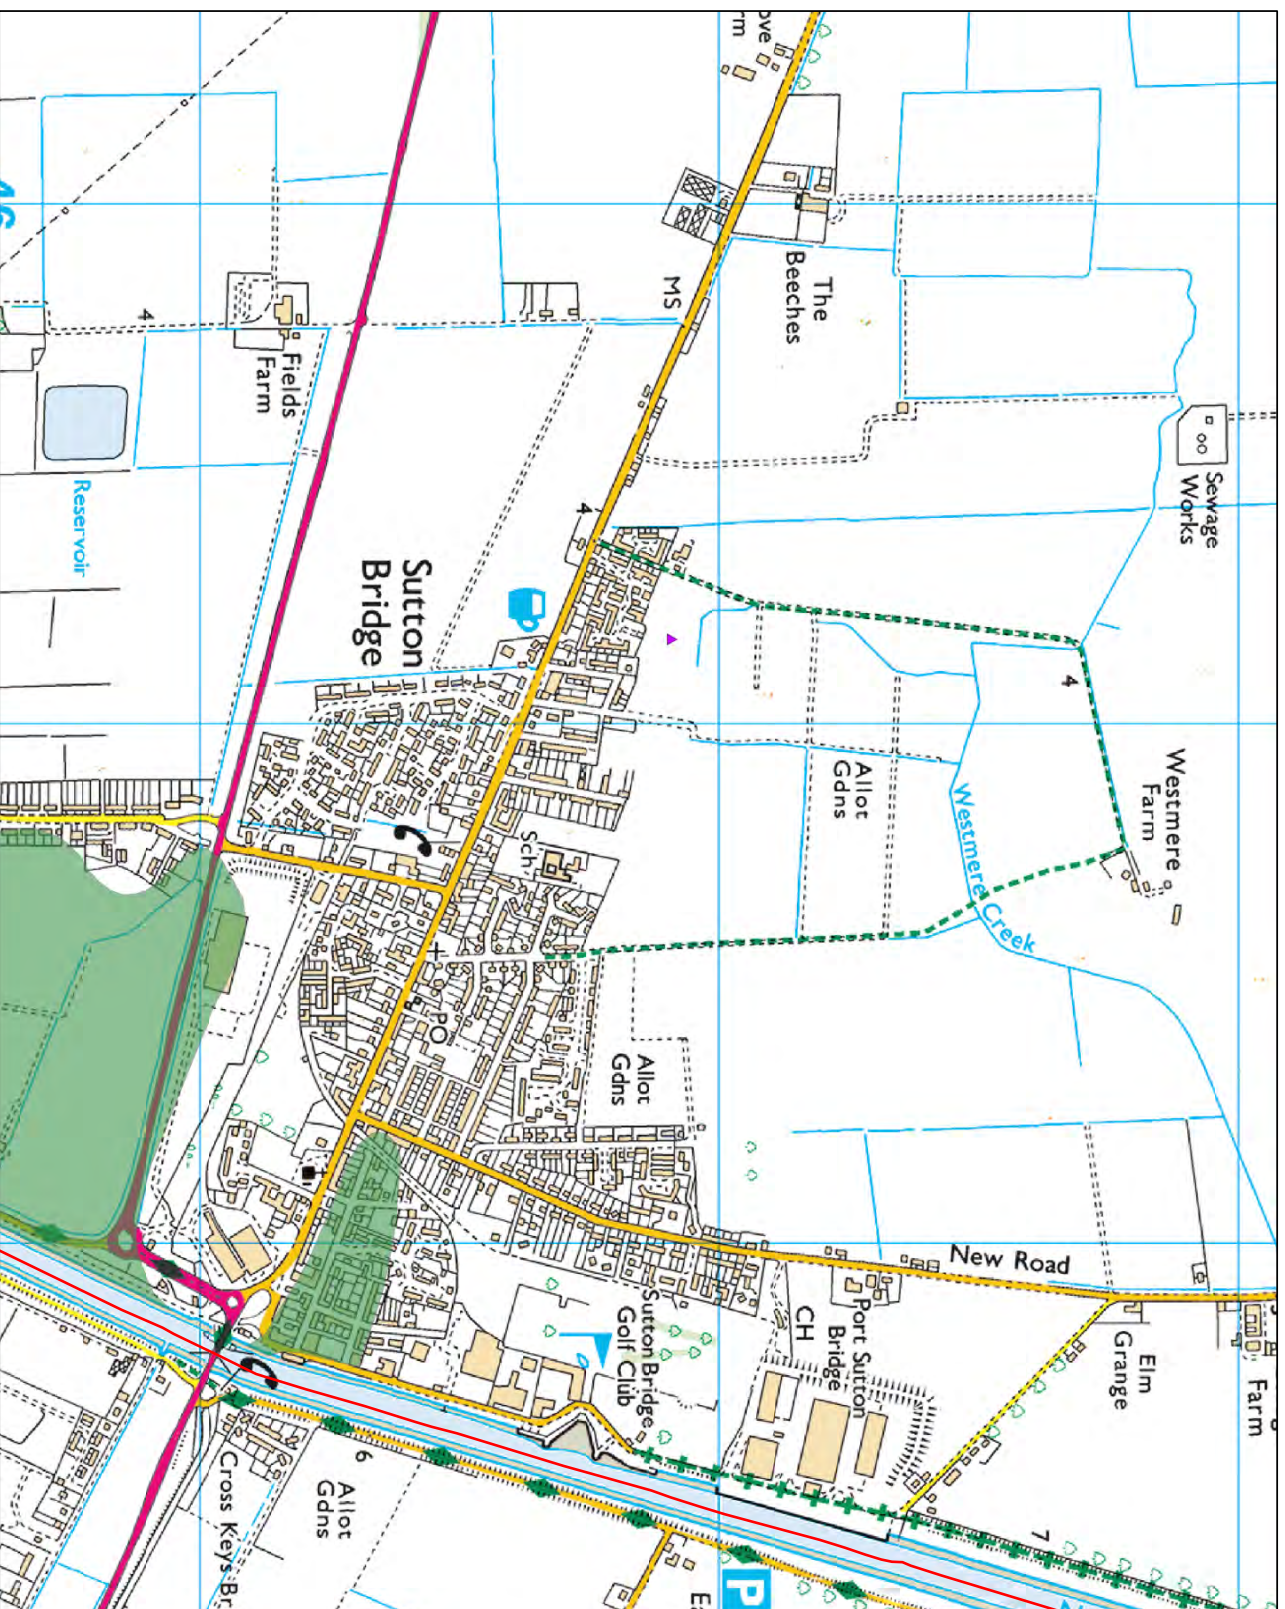

Scale 1:10,000



Legend

— Main River
— January 1978 on the Tidal River Nene

Created by the Partnerships and Strategic Overview Team,
Kettering

Environment
Agency




Tidal Water Levels for the South Humber, East Coast and The Wash

The table below shows still water levels for locations, from the above location map, around the South Humber Estuary, East Coast and The Wash. It is important to note the following:

- The base date for the data is 2014 for the South Humber and 2006 for the East Coast and The Wash.
- The data are still water levels. Depending on the use of the data it may be necessary to consider wave heights and / or joint probability analysis of water level and other variables.
- The water level quoted is the 'Best Estimate' water level. Depending on the use of the data it may be necessary to carry out sensitivity testing. Upper and Lower 95% confidence bandings are available upon request.
- Levels for other annual chance scenarios are available if required.

Ref	Location	Easting	Northing	Annual Chance (1 in x) of Tide Level					
				metres ODN					
				1	10	50	100	200	1000
HUMBER									
H030	Tetney	535420	403180	3.94	4.29	4.56	4.69	4.82	5.15
H050	Buck Beck	532700	406580	4.03	4.36	4.62	4.74	4.87	5.18
H060	Grimsby	527878	411346	4.10	4.43	4.70	4.82	4.95	5.27
H080	Haborough Marsh	520790	415740	4.26	4.61	4.88	5.01	5.14	5.47
H090	Immingham	519141	417449	4.26	4.61	4.88	5.01	5.14	5.47
H100	South Killingholme	518700	417120	4.41	4.77	5.05	5.18	5.32	5.66
H130	North Killingholme	516530	420000	4.51	4.87	5.15	5.28	5.42	5.77
H150	East Halton	514450	422870	4.59	4.96	5.25	5.39	5.53	5.89
H170	Goxhill	511970	425440	4.67	5.04	5.34	5.47	5.61	5.95
H200	New Holland	508020	424330	4.87	5.26	5.55	5.68	5.81	6.12
H210	Barrow Haven	506380	422620	4.92	5.31	5.60	5.73	5.86	6.17
H220	Ferriby	497550	421150	5.04	5.42	5.67	5.77	5.86	6.04
H230	Winterton	493420	422830	5.14	5.51	5.74	5.83	5.90	6.02
H250	Blacktoft	484247	424190	5.25	5.62	5.83	5.90	5.96	6.04
H270	Goole	474857	422960	5.46	5.85	6.07	6.15	6.21	6.29
East Coast									
~	Great Eau	545500	393800	3.80	4.19	4.46	4.57	4.69	4.96
~	Boygrift	553300	379800	3.84	4.24	4.53	4.65	4.77	5.05
~	Burgh Sluice	555190	358620	4.26	4.45	4.76	4.90	5.03	5.34
Wash									
~	Hobhole	536610	339940	4.82	5.30	5.64	5.78	5.93	6.27
~	Lawyers Sluice	540750	334550	4.84	5.32	5.66	5.80	5.95	6.29
~	West Lighthouse	549150	325750	4.88	5.37	5.71	5.86	6.01	6.35
~	Grand Sluice	532400	344500	4.88	5.33	5.65	5.78	5.93	~
~	Fosdyke Bridge	531700	332200	4.91	5.38	5.71	5.85	5.99	~
~	Marsh Road	526000	324000	5.04	5.44	5.73	5.85	5.98	~
~	Wisbech	546100	310000	4.83	5.25	5.53	5.66	5.78	~
~	Dog In Doublet	527300	299300	3.67	4.00	4.22	4.32	4.42	~

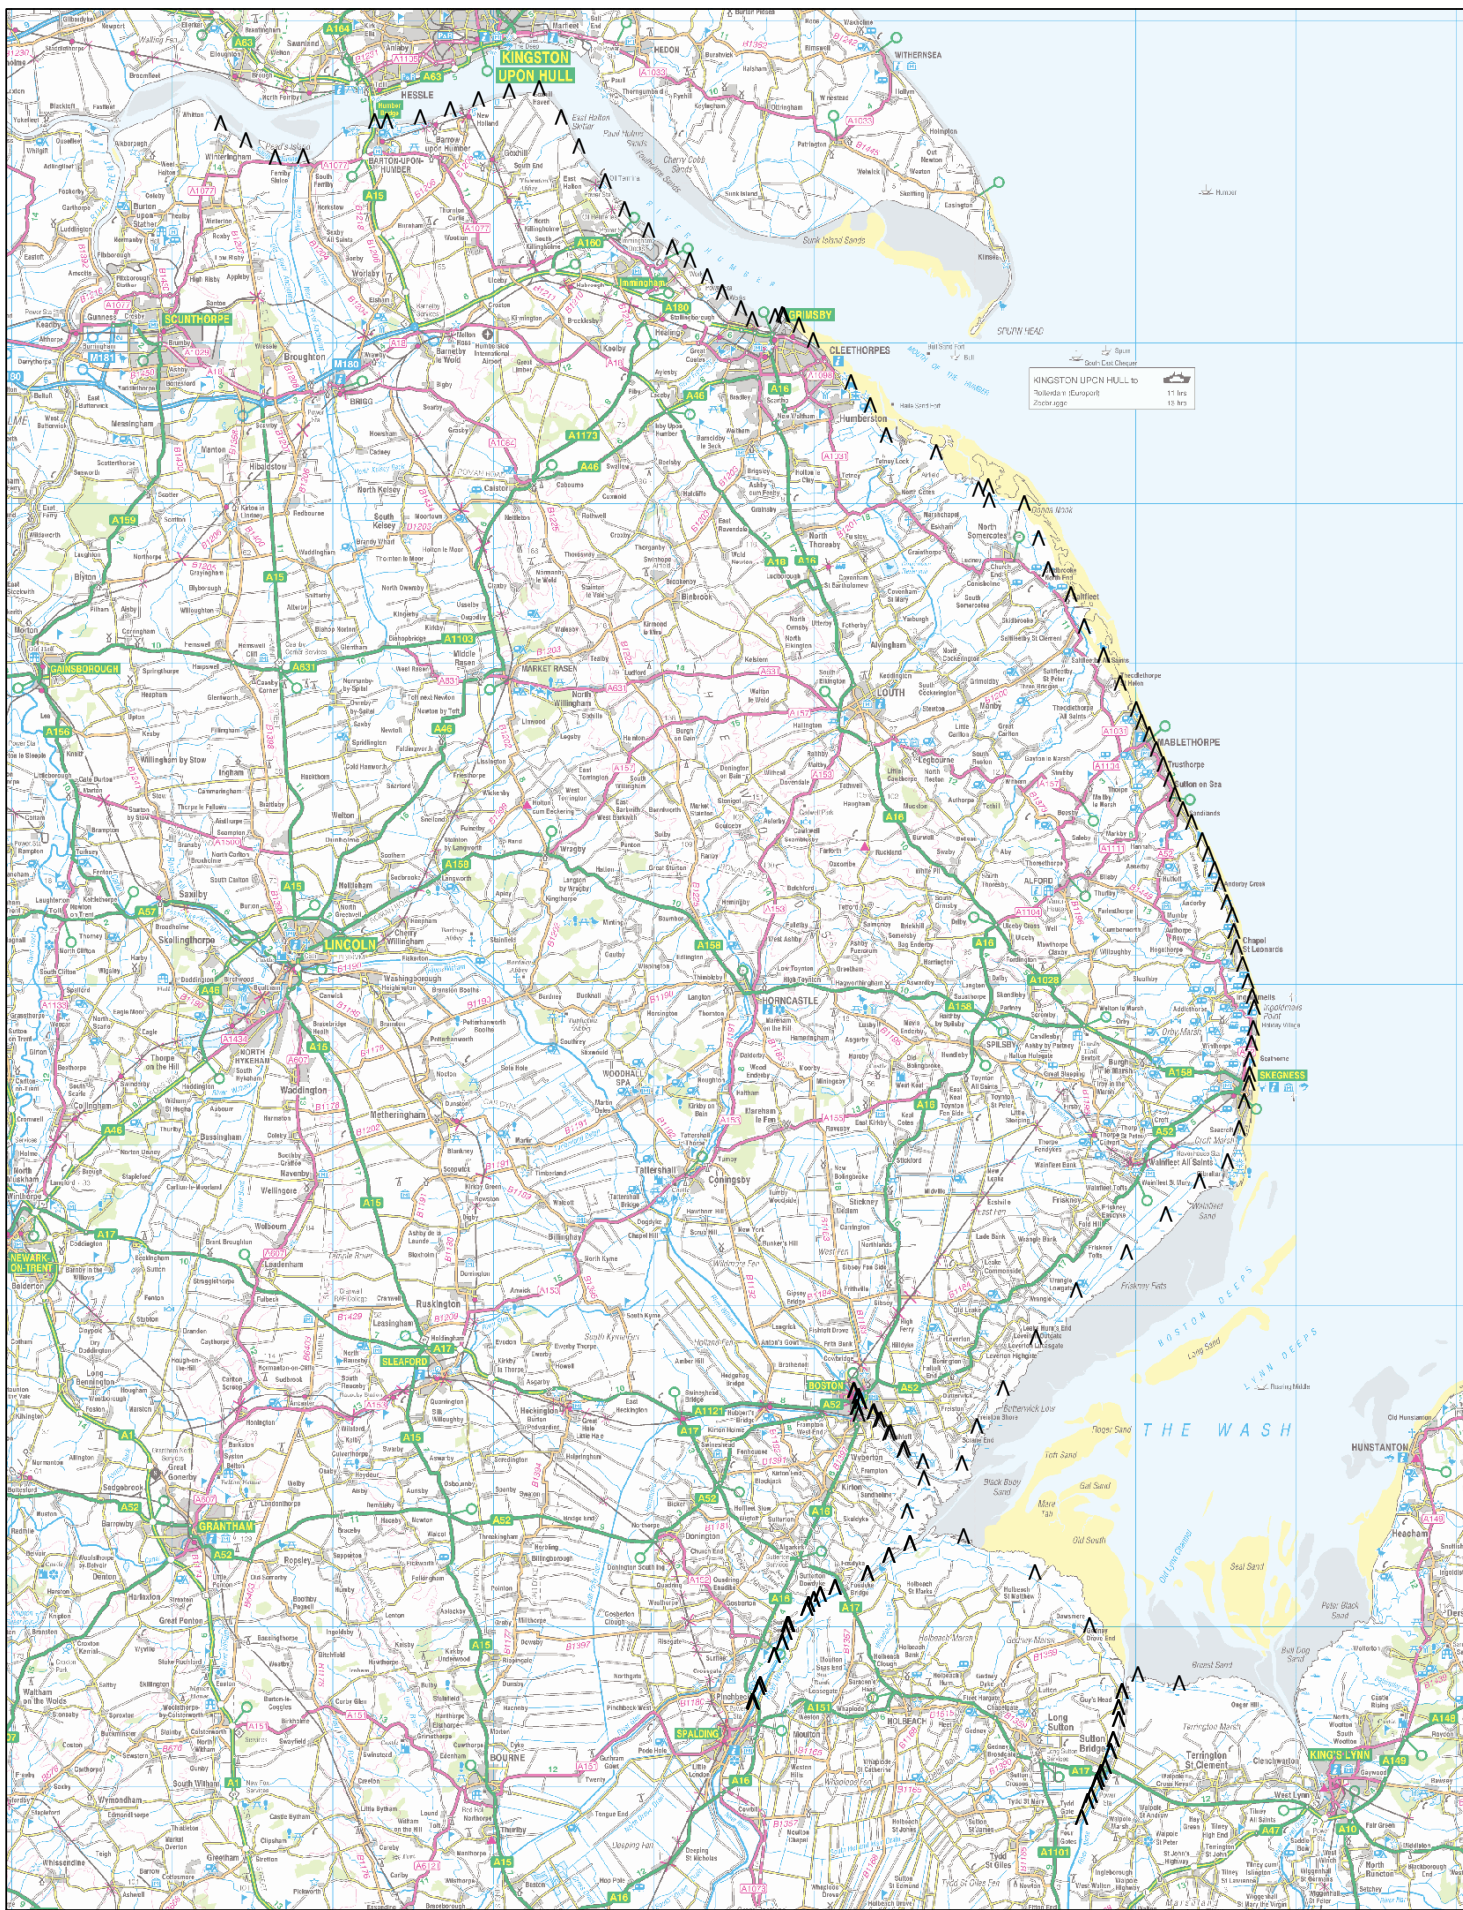

^ Modelled Breach Locations

0 3.5 7 14 Kilometres

This map indicates the location of where we have modelled the consequence of breaches in the defences along the coastline and tidal rivers. We have mapped the the maximum values of Hazard Rating (Danger to People), Depth and Velocity.

We have not assumed that all breaches occur at the same time, but have modelled each breach individually and overlaid the results to find the maximum values.

Our modelling only considers the consequences of a breach, it does not make any assumption about the likelihood of a breach occurring. Our defences generally provide a good standard of flood defence but a risk of breaching remains.

Please contact the Environment Agency for information on how these maps are used in the management of flood risk.

General Enquiries No: 03708 506 506.

Weekday daytime calls cost 5p plus up to 6ppm from BT Weekend Unlimited. Mobile and other providers charges may vary






Produced by the Partnership and Strategic Overview Team, Lincoln
 General Enquiries No: 03708 506 506

Northern Area Tidal Hazard Mapping

Location of Modelled Breaches

This map is reproduced by permission of Ordnance Survey on behalf of The Controller of Her Majesty's Stationary Office. Crown copyright All rights reserved. Environment Agency 100026360, 2018
 Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.

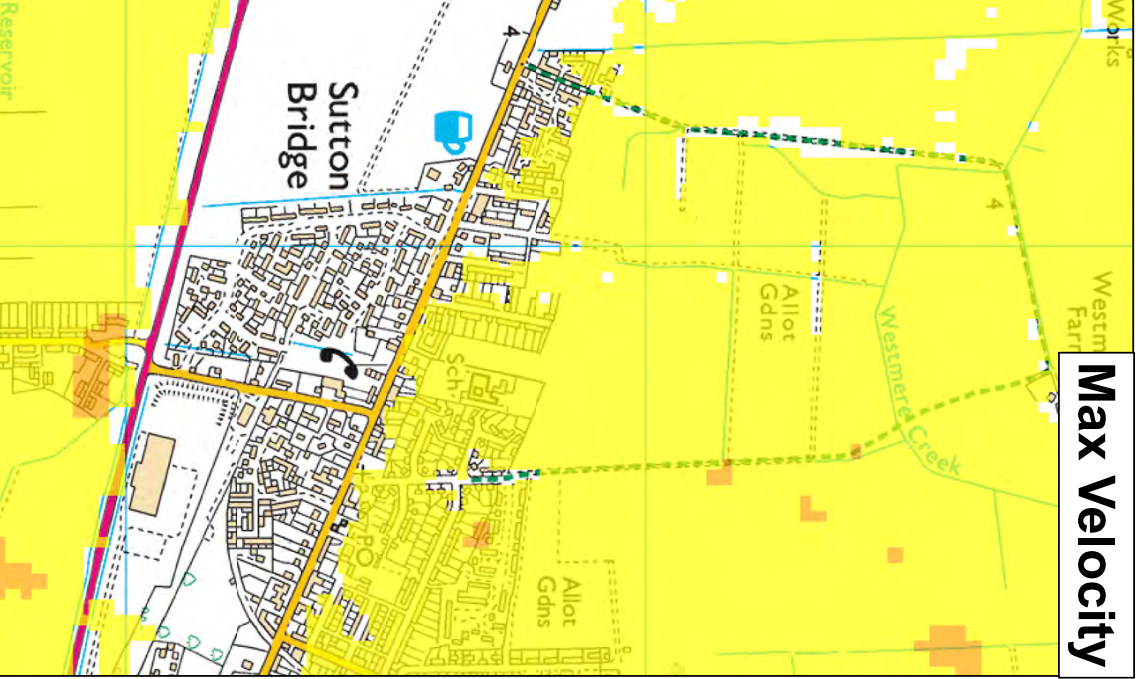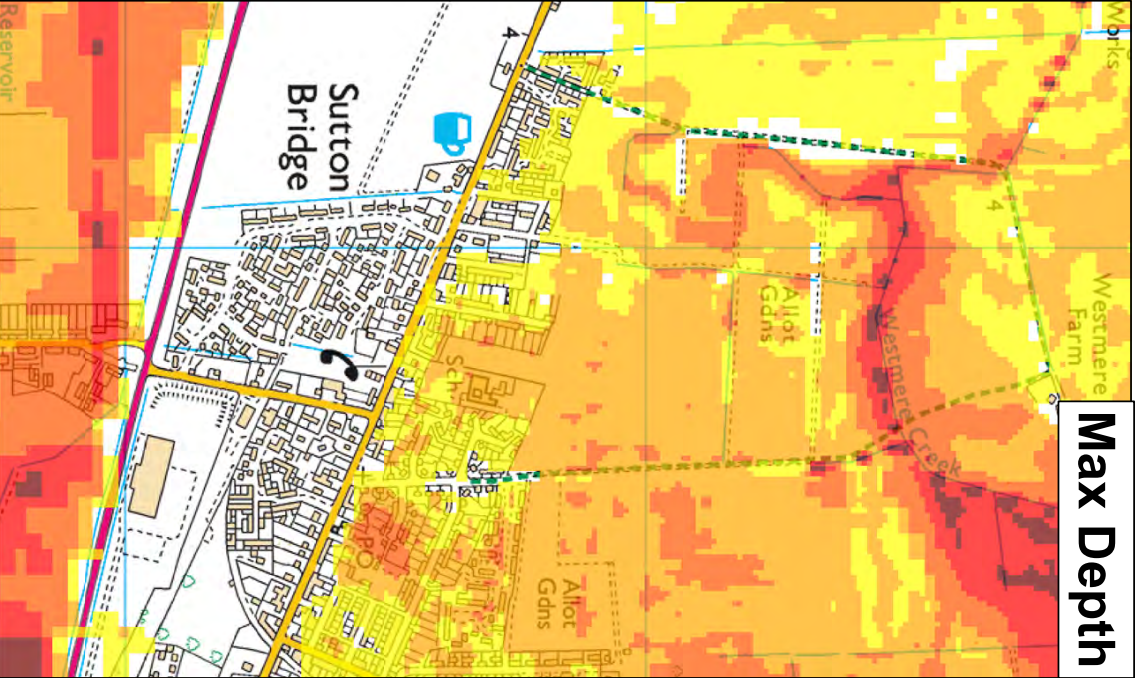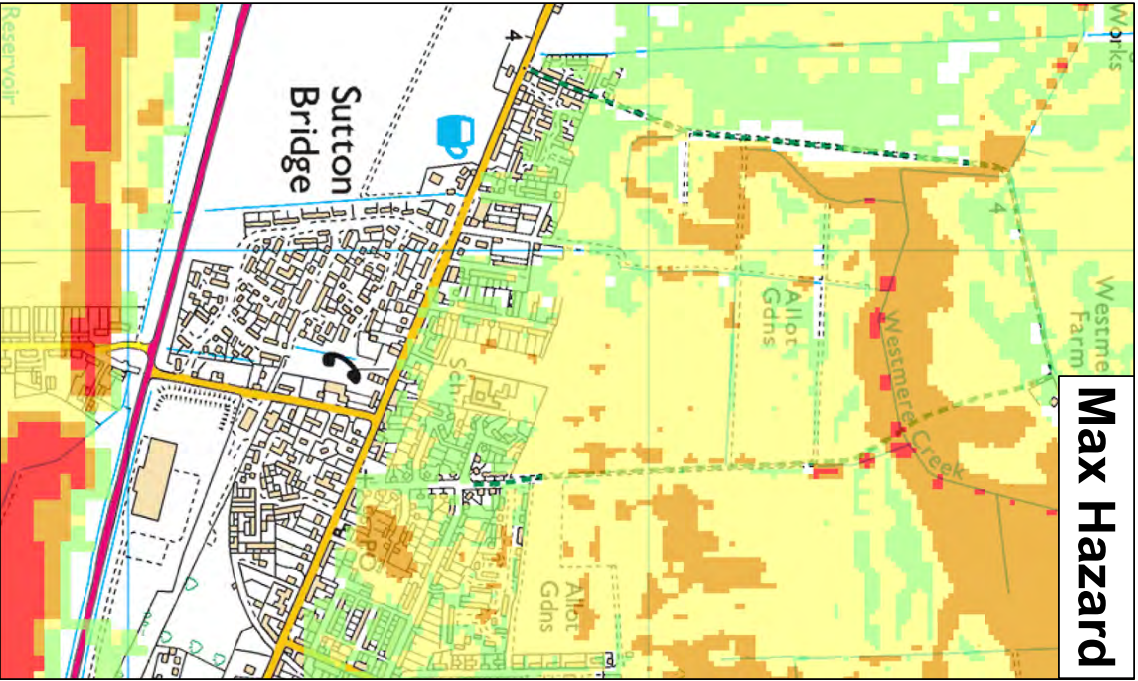

★ Modelled Breach Locations - see also the accompanying plan "Location of Modelled Breaches"					
Max Hazard (Flood Risk to People - F2D220)		Max Depth (m)		Max Velocity (m/s)	
Less than 0.75 (Low Hazard)		0 - 0.25		0 - 0.3	
Between 0.75 and 1.25 (Danger for Some)		0.25 - 0.50		0.3 - 1.0	
Between 1.25 and 2.0 (Danger for Most)		0.50 - 1.0		1.0 - 1.5	
Greater than 2.0 (Danger for All)		1.0 - 1.6		1.5 - 2.5	
		1.6 +		2.5 +	
Date Printed	December 2018	Scenario year	2006	Scenario Annual Chance	0.5% (1 in 200)
					CCN Number
					CCN-2018-110730

This map shows the level of flood hazard to people (called a hazard rating) if our flood defences are breached at certain locations, for a range of scenarios. The hazard rating depends on the depth and velocity of floodwater, and maximum values of these are also mapped.

The map is based on computer modelling of simulated breaches at specific locations. Each breach has been modelled individually and the results combined to create this map. Multiple breaches, other combinations of breaches, different sized tidal surges or flood flows may all give different results.

The map only considers the consequences of a breach, it does not make any assumption about the likelihood of a breach occurring. The likelihood of a breach occurring will depend on a number of different factors, including the construction and condition of the defences in the area. A breach is less likely where defences are of a good standard, but a risk of breaching remains.




General Enquiries No. 03708 506 506. Weekday Daytime calls cost 5p plus up to 6p per minute from BT Weekend Unlimited. Mobile and other providers charges may vary.




**Lincolnshire and Northamptonshire
Tidal Breaching Hazard
Mapping**

Map Centred on TF 47177 21844


This map is reproduced by permission of Ordnance Survey on behalf of the Crown. Copyright © 2018. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.

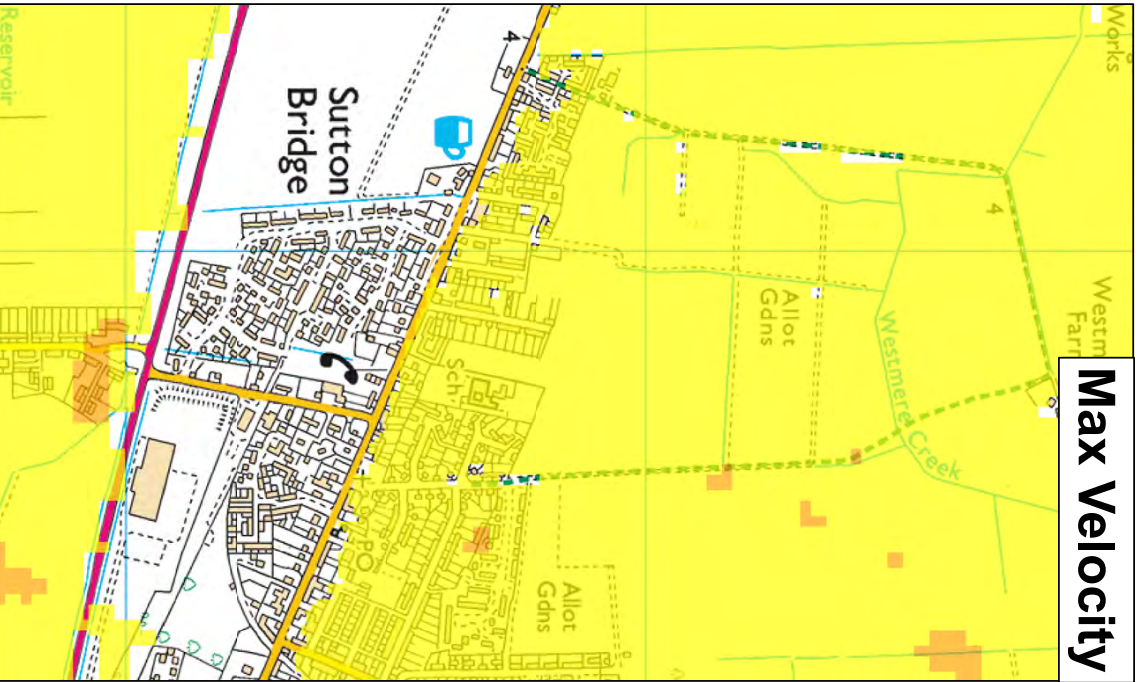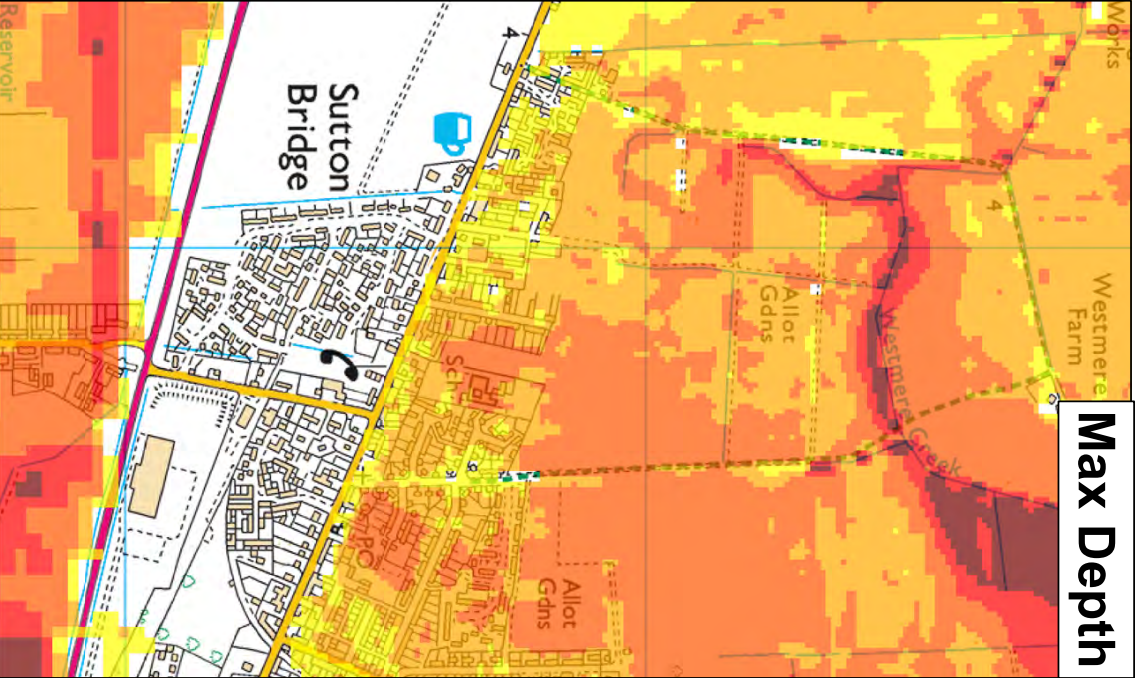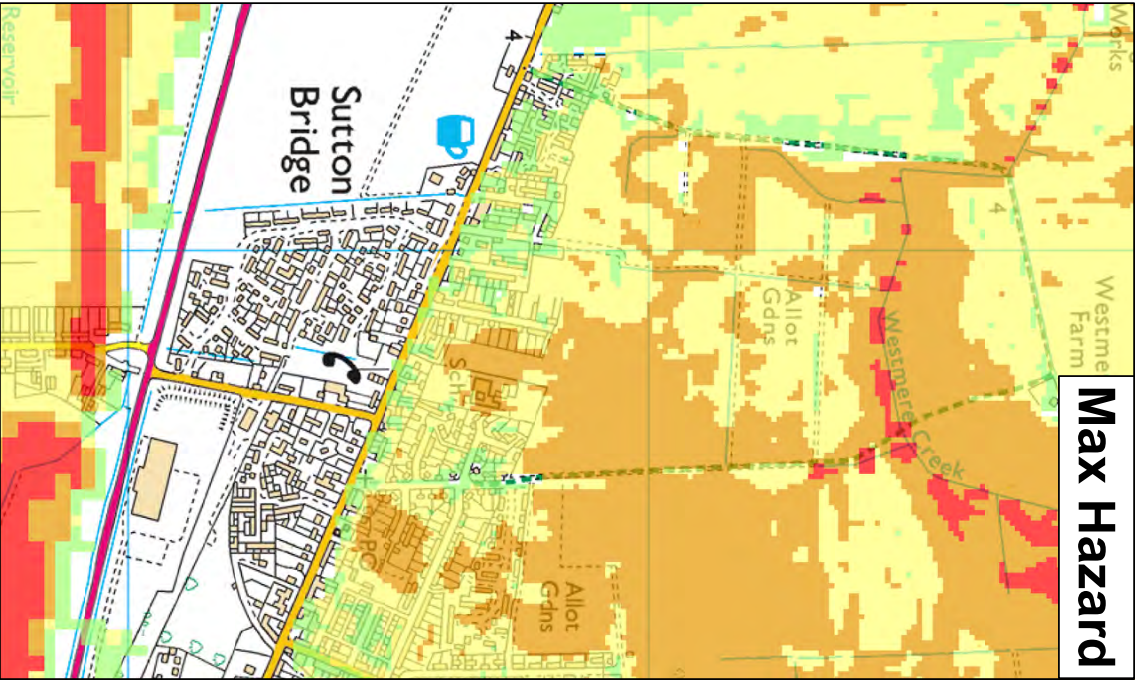


★ Modelled Breach Locations - see also the accompanying plan "Location of Modelled Breaches"					
Max Hazard (Flood Risk to People : FD2320)		Max Depth (m)		Max Velocity (m/s)	
 Less than 0.75 (Low Hazard)		 0 - 0.25		 0 - 0.3	
 Between 0.75 and 1.25 (Danger for Some)		 0.25 - 0.50		 0.3 - 1.0	
 Between 1.25 and 2.0 (Danger for Most)		 0.50 - 1.0		 1.0 - 1.5	
 Greater than 2.0 (Danger for All)		 1.0 - 1.6		 1.5 - 2.5	
		 1.6 +		 2.5 +	
Date Printed	Scenario year	2006	Scenario Annual Chance	0.1% (1 in 1000)	CCN Number
December 2018					CCN-2018-110730
This map shows the level of flood hazard to people (called a hazard rating) if our flood defences are breached at certain locations, for a range of scenarios. The hazard rating depends on the depth and velocity of floodwater, and maximum values of these are also mapped. The map is based on computer modelling of simulated breaches at specific locations. Each breach has been modelled individually and the results combined to create this map. Multiple breaches, other combinations of breaches, different sized tidal surges or flood flows may all give different results. The map only considers the consequences of a breach, it does not make any assumption about the likelihood of a breach occurring. The likelihood of a breach occurring will depend on a number of different factors, including the construction and condition of the defences in the area. A breach is less likely where defences are of a good standard, but a risk of breaching remains.					
General Enquiries No. 03708 506 506. Weekday Daytime calls cost 5p plus up to 6p per minute from BT Weekend Unlimited. Mobile and other providers charges may vary					
 Environment Agency Lincolnshire and Northamptonshire Tidal Breaching Hazard Mapping Map Centred on TF 47177 21844 This map is reproduced by permission of Ordnance Survey on behalf of the Controller of Her Majesty's Stationary Office. Crown copyright. All rights reserved. Environment Agency 100025380, 2018. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.					

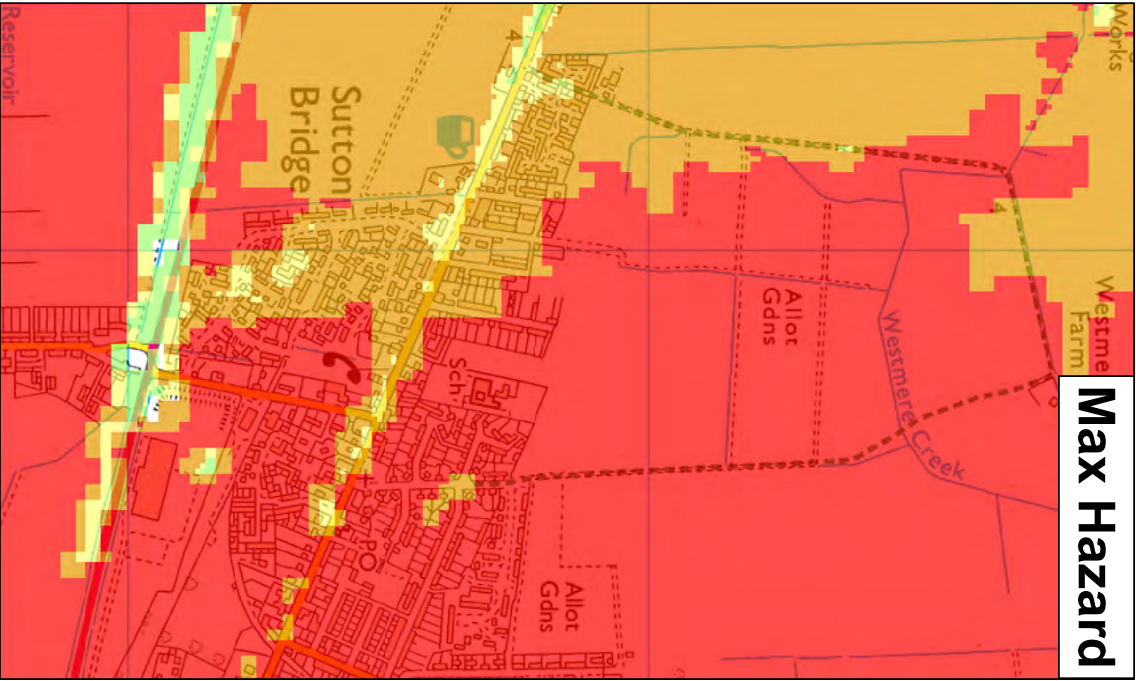

Max Hazard

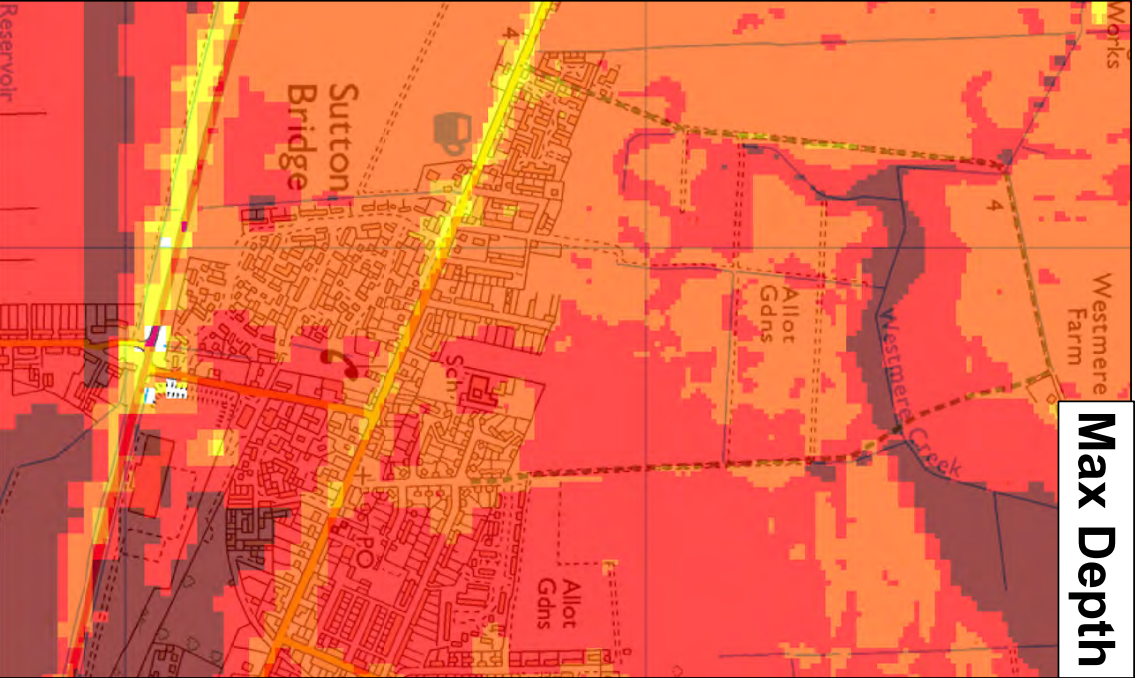


Max Depth

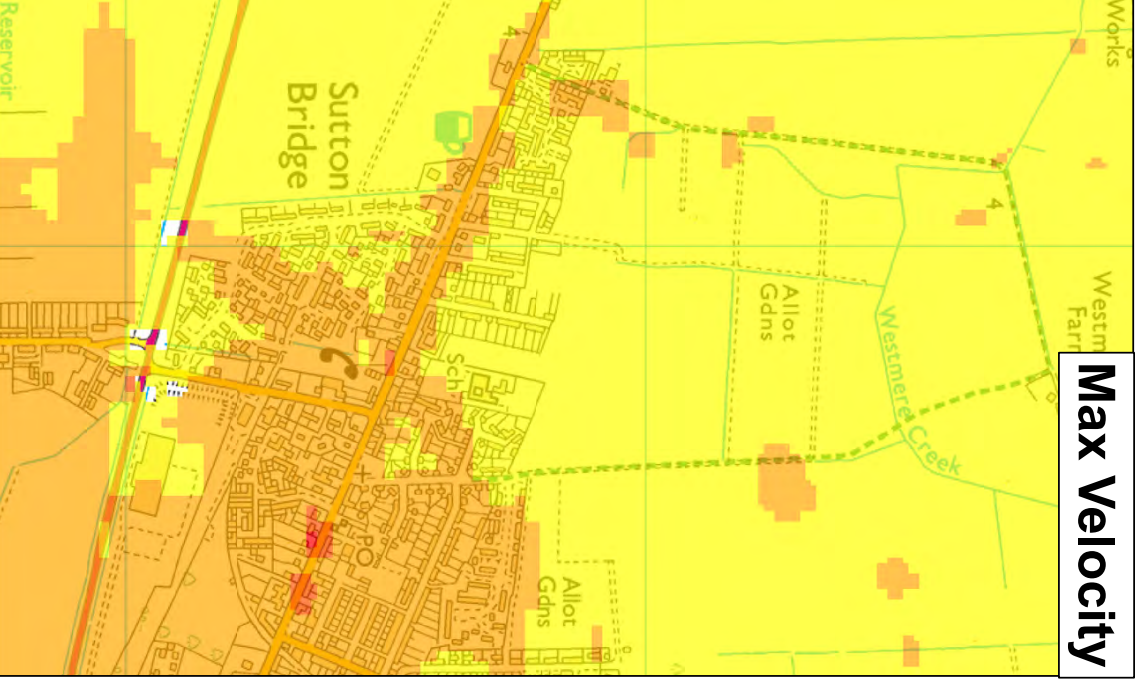


Max Velocity


★ Modelled Breach Locations - see also the accompanying plan "Location of Modelled Breaches"					
Max Hazard (Flood Risk to People : FD2320)		Max Depth (m)		Max Velocity (m/s)	
Less than 0.75 (Low Hazard)		0 - 0.25		0 - 0.3	
Between 0.75 and 1.25 (Danger for Some)		0.25 - 0.50		0.3 - 1.0	
Between 1.25 and 2.0 (Danger for Most)		0.50 - 1.0		1.0 - 1.5	
Greater than 2.0 (Danger for All)		1.0 - 1.6		1.5 - 2.5	
		1.6 +		2.5 +	
Date Printed	Scenario Year	2115	Scenario Annual Chance	0.5% (1 in 200)	CCN Number
December 2018					CCN-2018-110730
This map shows the level of flood hazard to people (called a hazard rating) if our flood defences are breached at certain locations, for a range of scenarios. The hazard rating depends on the depth and velocity of floodwater, and maximum values of these are also mapped. The map is based on computer modelling of simulated breaches at specific locations. Each breach has been modelled individually and the results combined to create this map. Multiple breaches, other combinations of breaches, different sized tidal surges or flood flows may all give different results. The map only considers the consequences of a breach, it does not make any assumption about the likelihood of a breach occurring. The likelihood of a breach occurring will depend on a number of different factors, including the construction and condition of the defences in the area. A breach is less likely where defences are of a good standard, but a risk of breaching remains. General Enquiries No: 03708 506 506. Weekday Daytime calls cost 5p plus up to 6p per minute from BT Weekend Unlimited. Mobile and other providers' Charges may vary					
 Environment Agency Lincolnshire and Northamptonshire Tidal Breaching Hazard Mapping Map Centred on TF 47177 21844 This map is reproduced by permission of Ordnance Survey on behalf of The Controller of Her Majesty's Stationary Office. Crown copyright. All rights reserved. Environment Agency 100028380, 2018. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.					

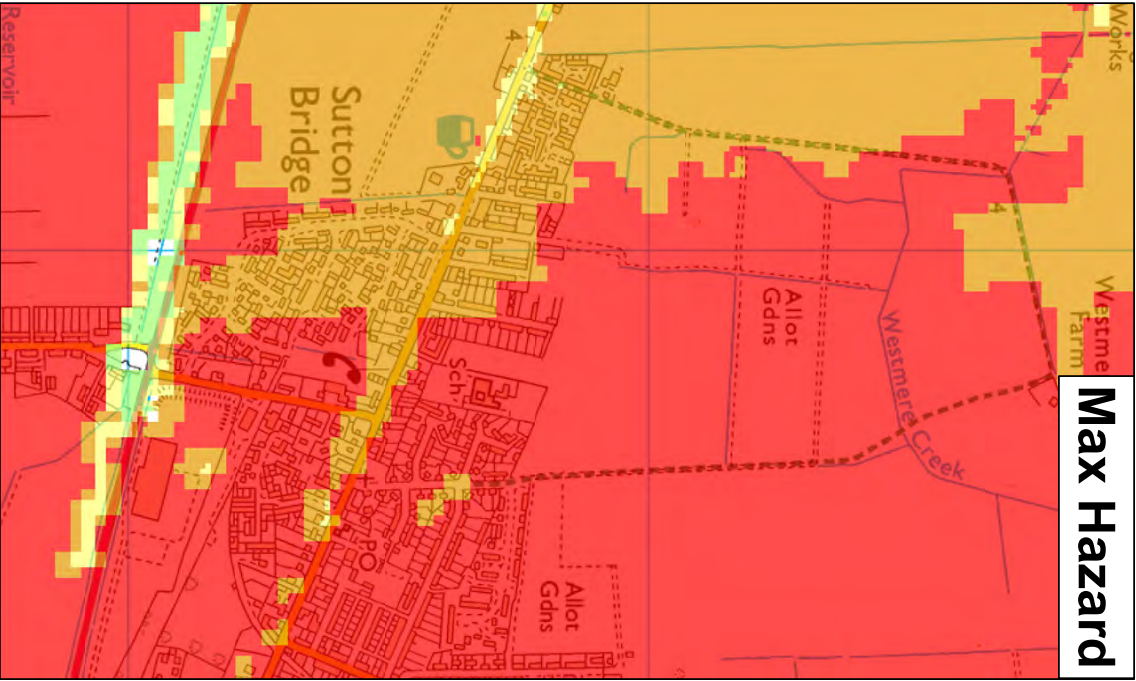

Max Hazard

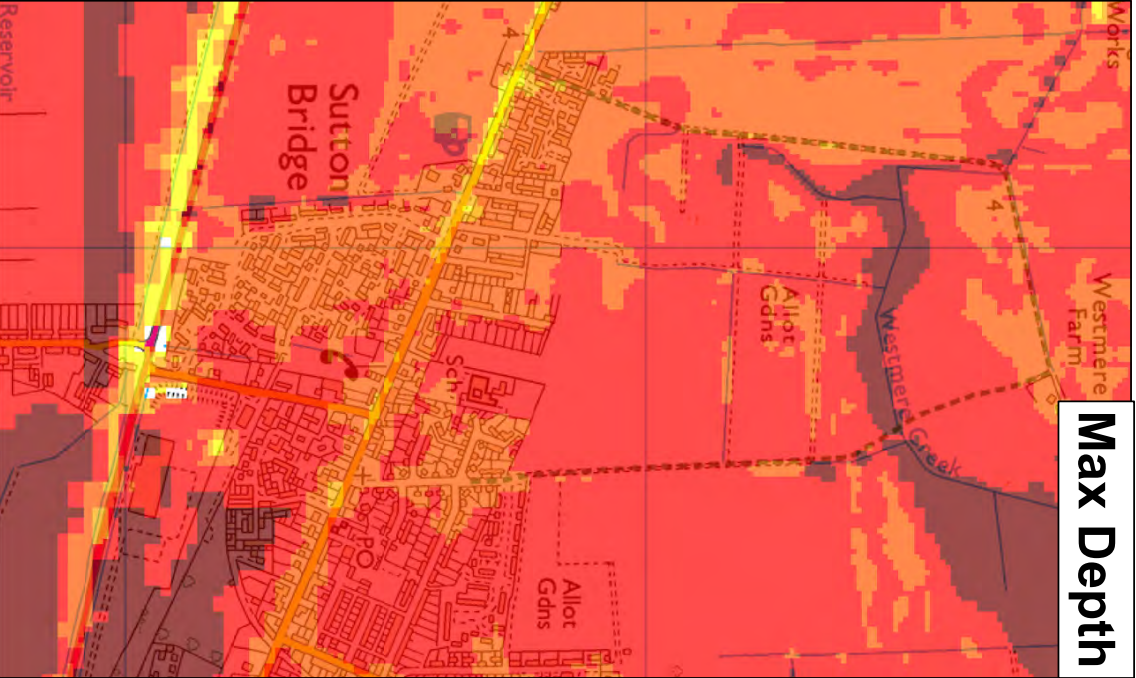

Max Depth

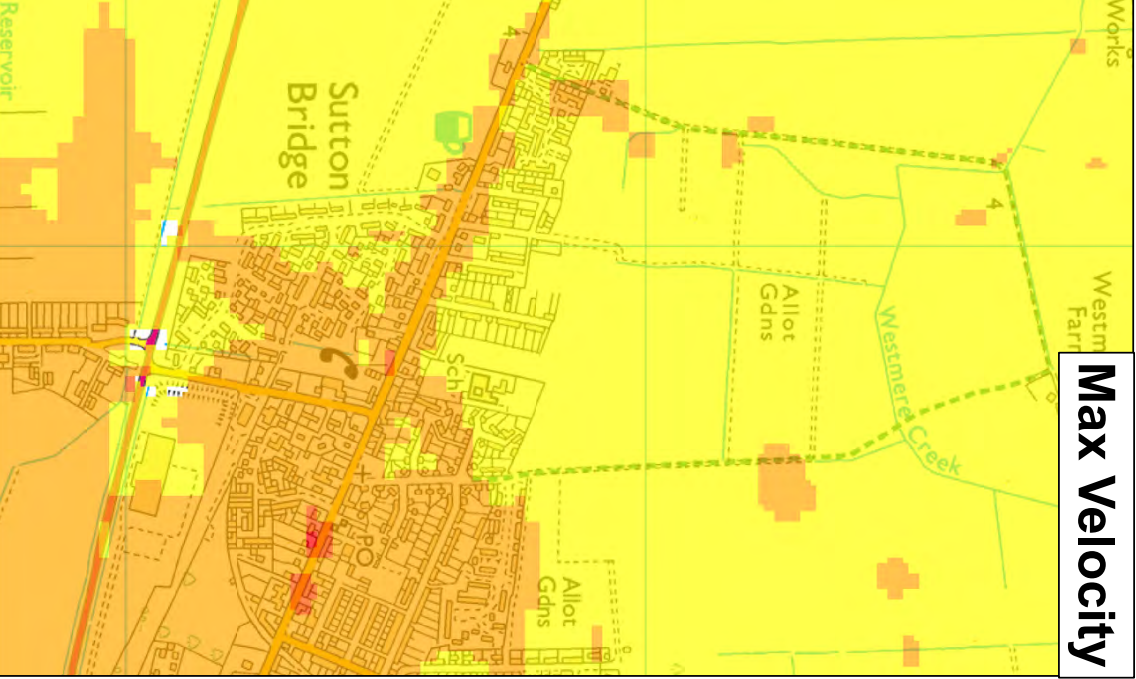

Max Velocity

★ Modelled Breach Locations - see also the accompanying plan "Location of Modelled Breaches"						
Max Hazard (Flood Risk to People : FD3220)		Max Depth (m)		Max Velocity (m/s)		
	Less than 0.75 (Low Hazard)		0 - 0.25		0 - 0.3	
	Between 0.75 and 1.25 (Danger for Some)		0.25 - 0.50		0.3 - 1.0	
	Between 1.25 and 2.0 (Danger for Most)		0.50 - 1.0		1.0 - 1.5	
	Greater than 2.0 (Danger for All)		1.0 - 1.6		1.5 - 2.5	
			1.6 +		2.5 +	
Date Printed	December 2018	Scenario Year	2115	Scenario Annual Chance (1 in 1000)	0.1%	CCN Number CCN-2018-110730

This map shows the level of flood hazard to people (called a hazard rating) if our flood defences are breached at certain locations, for a range of scenarios. The hazard rating depends on the depth and velocity of floodwater, and maximum values of these are also mapped.

The map is based on computer modelling of simulated breaches at specific locations. Each breach has been modelled individually and the results combined to create this map. Multiple breaches, other combinations of breaches, different sized tidal surges or flood flows may all give different results.

The map only considers the consequences of a breach, it does not make any assumption about the likelihood of a breach occurring. The likelihood of a breach occurring will depend on a number of different factors, including the construction and condition of the defences in the area. A breach is less likely where defences are of a good standard, but a risk of breaching remains.

General Enquiries No. 03708 506 506. Weekday Daytime calls cost 5p plus up to 6p per minute from BT Weekend Unlimited. Mobile and other providers charges may vary.



Lincolnshire and Northamptonshire
Tidal Breaching Hazard
Mapping

Map Centred on TF 47177 21844

This map is reproduced by permission of Ordnance Survey on behalf of the Crown. Copyright © 2018. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.

APPENDIX 5 – ANGLIAN WATER PRE DEVELOPMENT ENQUIRY



Pre-Planning Assessment Report

Sutton Bridge

InFlow Reference: PPE-0100042

Assessment Type: Used Water

Report published: 30/07/2020



Thank you for submitting a pre-planning enquiry.

This has been produced for SEA Structural Engineers Ltd.

Your reference number is **PPE-0100042**.

This report can be submitted as a drainage strategy for the development should it seek planning permission.

If you have any questions upon receipt of this report, you can submit a further question via InFlow. Alternatively, please contact the Planning & Capacity team on **0345 60 66 087**, Option 1 or email planningliaison@anglianwater.co.uk

Section 1 - Proposed development

The response within this report has been based on the following information which was submitted as part of your application:

List of planned developments	
Type of development	No. Of units
Dwellings	150

The anticipated residential build rate is:

Year	Y1	Y2	Y3
Build rate	50	50	50

Development type: Greenfield
Planning application status: Unknown
Site grid reference number: TF4707521846

The comments contained within this report relate to the public water mains and sewers indicated on our records.

Your attention is drawn to the disclaimer in the useful information section of this report.

Section 2 - Assets affected

Our records indicate that we have the following types of assets within or overlapping the boundary of your development site as listed in the table below.

Additionally, it is highly recommended that you carry out a thorough investigation of your proposed working area to establish whether any unmapped public or private sewers and lateral drains are in existence. We are unable to permit development either over or within the easement strip without our prior consent. The extent of the easement is provided in the table below. Please be aware that the existing water mains/public sewers should be located in highway or open space and not in private gardens. This is to ensure available access for any future maintenance and repair and this should be taken into consideration when planning your site layout.

Water and Used water easement information		
Asset type	Pipe size (mm)	Total easement required (m)
Sewer mains	900	4.00 m either side of the centre line
Sewer mains	150	3.00 m either side of the centre line

If it is not possible to avoid our assets then these may need to be diverted in accordance with Section 185 of the Water Industry Act (1991). You will need to make a formal application if you would like a diversion to be considered.

Pumping Station

The development site is within 15 metres of a sewage pumping station. This asset requires access for maintenance and will have sewerage infrastructure leading to it. For practical reasons therefore it cannot be easily relocated. Anglian Water consider that dwellings located within 15 metres of the pumping station would place them at risk of nuisance in the form of noise, odour or the general disruption from maintenance work caused by the normal operation of the pumping station. The site layout should take this into account and accommodate this infrastructure type through a necessary cordon sanitaire, through public space or highway infrastructure to ensure that no development within 15 metres from the boundary of a sewage pumping station if the development is potentially sensitive to noise or other disturbance or to ensure future amenity issues are not created.

Due to the private sewer transfer in October 2011 many newly adopted public used water assets and their history are not indicated on our records. You also need to be aware that your development site may contain private water mains, drains or other assets not shown on our records. These are private assets and not the responsibility of Anglian Water but that of the landowner.

Section 3 - Water recycling services

In examining the used water system we assess the ability for your site to connect to the public sewerage network without causing a detriment to the operation of the system. We also assess the receiving water recycling centre and determine whether the water recycling centre can cope with the increased flow and effluent quality arising from your development.

Water recycling centre

The foul drainage from the proposed development is in the catchment of Sutton Bridge Water Recycling Centre, which currently has capacity to treat the flows from your development site. Anglian Water cannot reserve capacity and the available capacity at the water recycling centre can be reduced at any time due to growth, environmental and regulation driven changes.

Used water network

Our assessment has been based on development flows connecting to the nearest foul water sewer of the same size or greater pipe diameter to that required to drain the site. The infrastructure to convey foul water flows to the receiving sewerage network is assumed to be the responsibility of the developer. Conveyance to the connection point is considered as Onsite Work and includes all work carried out upstream from of the point of connection, including making the connection to our existing network. This connection point has been determined in reference to the calculated discharge flow and on this basis, a 150mm internal diameter pipe is required to drain the development site. The nearest practicable connection is to the 150mm diameter sewer at manhole 1801 in Chestnut Terrace at National Grid Reference NGR TF 47161 21807. The cover level is 3.56m and the invert level is 2.24m. Anglian water has assessed the impact of a pumped conveyance from the planned development to the public foul sewerage network and we can confirm that this connection is acceptable as the foul sewerage system, at present, has available capacity for your site. In line with Sewers for Adoption, the pumped discharge will need to connect via an intermediate manhole and at least 5 metres of an appropriately sized gravity sewer. The pump rate and configuration of the connection will be determined with your detailed design. You should submit this detail with your Section 106 new connection application. Please note that Anglian Water will request a suitably worded condition at planning application stage to ensure this strategy is implemented to mitigate the risk of flooding.

It is assumed that the developer will provide the necessary infrastructure to convey flows from the site to the network. Consequently, this report does not include any costs for the conveyance of flows.

Surface water disposal

In principle, your proposed method of surface water disposal is acceptable to Anglian Water. It is our understanding that the evidence to confirm compliance with the surface water hierarchy is not available. Once the evidence has been confirmed, then a connection point may be made to the public surface water sewer to the East of the development at NGR TF4743121784 at a point to suit the development layout at a discharge rate of 5l/s. Our assessment has been based on development flows connecting to the nearest surface water sewer of the same size or greater pipe diameter. It is your responsibility to provide the evidence to confirm that all alternative methods of surface water disposal have been explored and these will be required before your connection can be agreed. This is subject to satisfactory evidence which shows the surface water management hierarchy as outlined in Building Regulations Part H has been explored. This would encompass the results from the site specific infiltration testing and/or confirmation that the flows cannot be discharged to a watercourse. Anglian Water's surface water policy follows the Surface Water hierarchy, outlined in Part H of the Building Regulations. Should your assumptions or evidence change then an alternative solution, connection point or flow rate may be required. You are therefore advised to update Anglian Water with the key supporting evidence at your earliest convenience.

As you may be aware, Anglian Water will consider the adoption of SuDs provided that they meet the criteria outline in our SuDs adoption manual. This can be found on our [website](#). We will adopt features located in public open space that are designed and constructed, in conjunction with the Local Authority and Lead Local Flood Authority (LLFA), to the criteria within our SuDs adoption manual. Specifically, developers must be able to demonstrate:

1. Effective upstream source control,
2. Effective exceedance design, and
3. Effective maintenance schedule demonstrating that the assets can be maintained both now and in the future with adequate access.

If you wish to look at the adoption of any SuDs then an expression of interest form can be found on our [website](#)

Trade Effluent

We note that you do not have any trade effluent requirements. Should this be required in the future you will need our written formal consent. This is in accordance with Section 118 of the Water Industry Act (1991).

Used Water Budget Costs

Your development site will be required to pay an infrastructure charge for each new property connecting to the public sewer that benefits from Full planning permission.

You will be required to pay an infrastructure charge upon connection for each new plot on your development site. The infrastructure charge are types of charges set out in Section 146(2) of the Water Industry Act 1991

The charge should be paid by anyone who wishes to build or develop a property and is payable upon request of connection.

Payment of the infrastructure charge must be made before premises are connected to the public sewer.

Infrastructure charge for water recycling:	£ 570.00
--	-----------------

The Water Recycling Infrastructure charge for your dwellings is:

Infrastructure charge	Number of units	Total
£ 570.00	150	£ 85500

Infrastructure charges are raised on a standard basis of one charge per new connection (one for water and one for sewerage). However, if the new connection is to non- household premises, the fixed element is calculated according to the number and type of water fittings in the premises. This is called the "relevant multiplier" method of calculating the charge.

Details of the relevant multiplier for each fitting can be found at our [website](#).

It has been assumed that the onsite used water network will be provided under Section 104 of the Water Industry Act

It is recommended that you also budget for connection costs.

Please note that we offer alternative types of connections depending on your needs and these costs are available at our [website](#).

Section 4 - Map of Proposed Connection Points



Figure 1: Showing your used water point of connection



Figure 2: Showing your surface water point of connection

Section 5 - Useful information

Water Industry Act – Key used water sections

Section 98:

This provides you with the right to requisition a new public sewer. The new public sewer can be constructed by Anglian Water on your behalf. Alternatively, you can construct the sewer yourself under section 30 of the Anglian Water Authority Act 1977.

Section 102:

This provides you with the right to have an existing sewerage asset vested by us. It is your responsibility to bring the infrastructure to an adoptable condition ahead of the asset being vested.

Section 104:

This provides you with the right to have a design technically vetted and an agreement reached that will see us adopt your assets following their satisfactory construction and connection to the public sewer.

Section 106:

This provides you with the right to have your constructed sewer connected to the public sewer.

Section 185

This provides you with the right to have a public sewerage asset diverted.

Details on how to make a formal application for a new sewer, new connection or diversion are available on our [website](#) or via our Development Services team on **0345 60 66 087**.

Sustainable drainage systems

Many existing urban drainage systems can cause problems of flooding, pollution or damage to the environment and are not resilient to climate change in the long term. .

Our preferred method of surface water disposal is through the use of Sustainable Drainage Systems or SuDS.

SuDS are a range of techniques that aim to mimic the way surface water drains in natural systems within urban areas. For more information on SuDS, please visit our [website](#)

We recommend that you contact the Local Authority and Lead Local Flood Authority (LLFA) for your site to discuss your application.

Private sewer transfers

Sewers and lateral drains connected to the public sewer on the 1 July 2011 transferred into Water Company ownership on the 1 October 2011. This follows the implementation of the Floods and Water Management Act (FWMA). This included sewers and lateral drains that were subject to an existing Section 104 Adoption Agreement and those that were not. There were exemptions and the main non-transferable assets were as follows:

Surface water sewers and lateral drains that do not discharge to the public sewer, e.g. those that discharged to a watercourse.

Foul sewers and lateral drains that discharged to a privately owned sewage treatment/collection facility.

Pumping stations and rising mains will transfer between 1 October 2011 and 1 October 2016.

The implementation of Section 42 of the FWMA will ensure that future private sewers will not be created. It is anticipated that all new sewer applications will need to have an approved section 104 application ahead of a section 106 connection.

It is anticipated that all new sewer applications will need to have an approved Section104 application ahead of a Section 106 connection

Encroachment

Anglian Water operates a risk based approach to development encroaching close to our used water infrastructure. We assess the issue of encroachment if you are planning to build within 400 metres of a water recycling centre or, within 15 metres to 100 metres of a pumping station. We have more information available on our [website](#)

Locating our assets

Maps detailing the location of our water and used water infrastructure including both underground assets and above ground assets such as pumping stations and recycling centres are available from [digdat](#)

All requests from members of the public or non-statutory bodies for maps showing the location of our assets will be subject to an appropriate administrative charge.

We have more information on our [website](#)

Charging arrangements

Our charging arrangements and summary for this year's water and used water connection and infrastructure charges can be found on our [website](#)

Section 6 - Disclaimer

The information provided in this report is based on data currently held by Anglian Water Services Limited ('Anglian Water') or provided by a third party. Accordingly, the information in this report is provided with no guarantee of accuracy, timeliness, completeness and is without indemnity or warranty of any kind (express or implied).

This report should not be considered in isolation and does not nullify the need for the enquirer to make additional appropriate searches, inspections and enquiries. Anglian Water supports the plan led approach to sustainable development that is set out in the National Planning Policy Framework ('NPPF') and any infrastructure needs identified in this report must be considered in the context of current, adopted and/or emerging local plans. Where local plans are absent, silent or have expired these needs should be considered against the definition of sustainability holistically as set out in the NPPF.

Whilst the information in this report is based on the presumption that proposed development obtains planning permission, nothing in this report confirms that planning permission will be granted or that Anglian Water will be bound to carry out the works/proposals contained within this report.

No liability whatsoever, including liability for negligence is accepted by Anglian Water or its partners, employees or agents, for any error or omission, or for the results obtained from the use of this report and/or its content.

Furthermore, in no event will any of those parties be liable to the applicant or any third party for any decision made or action taken as a result of reliance on this report.

This report is valid for the date printed and the enquirer is advised to resubmit their request for an up to date report should there be a delay in submitting any subsequent application for water supply/sewer connection(s).

APPENDIX 6 – PROPOSED IMPERMEABLE AREA PLAN

APPENDIX 7 – GREENFIELD RUNOFF CALCULATIONS

Calculated by:

Site name:

Site location:

This is an estimation of the greenfield runoff rates that are used to meet normal best practice criteria in line with Environment Agency guidance "Rainfall runoff management for developments", SC030219 (2013), the SuDS Manual C753 (Ciria, 2015) and the non-statutory standards for SuDS (Defra, 2015). This information on greenfield runoff rates may be the basis for setting consents for the drainage of surface water runoff from sites.

Site Details

Latitude:

Longitude:

Reference:

Date:

Runoff estimation approach

Site characteristics

Total site area (ha):

Methodology

Q_{BAR} estimation method:

SPR estimation method:

Soil characteristics

	Default	Edited
SOIL type:	2	2
HOST class:	N/A	N/A
SPR/SPRHOST:	0.3	0.3

Hydrological characteristics

	Default	Edited
SAAR (mm):	583	583
Hydrological region:	5	5
Growth curve factor 1 year:	0.87	0.87
Growth curve factor 30 years:	2.45	2.45
Growth curve factor 100 years:	3.56	3.56
Growth curve factor 200 years:	4.21	4.21

Notes

(1) Is $Q_{BAR} < 2.0$ l/s/ha?

When Q_{BAR} is < 2.0 l/s/ha then limiting discharge rates are set at 2.0 l/s/ha.

(2) Are flow rates < 5.0 l/s?

Where flow rates are less than 5.0 l/s consent for discharge is usually set at 5.0 l/s if blockage from vegetation and other materials is possible. Lower consent flow rates may be set where the blockage risk is addressed by using appropriate drainage elements.

(3) Is $SPR/SPRHOST \leq 0.3$?

Where groundwater levels are low enough the use of soakaways to avoid discharge offsite would normally be preferred for disposal of surface water runoff.

Greenfield runoff rates

	Default	Edited
Q_{BAR} (l/s):	4.77	4.77
1 in 1 year (l/s):	4.15	4.15
1 in 30 years (l/s):	11.68	11.68
1 in 100 year (l/s):	16.96	16.96
1 in 200 years (l/s):	20.06	20.06

This report was produced using the greenfield runoff tool developed by HR Wallingford and available at www.uksuds.com. The use of this tool is subject to the UK SuDS terms and conditions and licence agreement, which can both be found at www.uksuds.com/terms-and-conditions.htm. The outputs from this tool are estimates of greenfield runoff rates. The use of these results is the responsibility of the users of this tool. No liability will be accepted by HR Wallingford, the Environment Agency, CEH, Hydrosolutions or any other organisation for the use of this data in the design or operational characteristics of any drainage scheme.

APPENDIX 8 – 1in1, 1in30 and 1in100+40% STORM WATER CALCULATIONS