

PROPOSED REPLACEMENT DWELLING AT 110 NEW ROAD,
SUTTON BRIDGE, SPALDING, PE12 9RQ
FLOOD RISK ASSESSMENT



View of existing bungalow from New Road

S M Hemmings B Sc C Eng MICE MIWEM,
13 Lea Gardens,
Peterborough,
PE3 6BY

This flood risk assessment has been prepared solely to support the planning application for a replacement building at 110 New Road, Sutton Bridge. The author has made every effort to provide an accurate assessment of the flood risk but accepts no liability should the information be found to be incorrect or incomplete, or if it is used for any other purposes other than for which it was originally commissioned.

Introduction


An application is due to be made to South Holland District Council for Planning Permission to demolish the existing bungalow at 110 New Road, Sutton Bridge, Spalding, PE12 9RQ and construct a new two storey dwelling. The site is located approximately 430 metres west of the west bank of the tidal River Nene and on the northern side of Sutton Bridge.

The site is within Flood Zone 3 as shown on the Environment Agency's Flood Zone Map. These maps do not take into account existing flood defences.

The Planning Application requires a Flood Risk Assessment to be carried out as specified in the Practice Guidance to the National Planning Policy Framework Development and Flood Risk. The site is shown within the defended area of the South Holland District Council's Strategic Flood Risk Assessment (SHDC SFRA) map and is located in the South Holland Internal Drainage Board district.

Environment Agency (EA) Flood Zones

The map below is taken from the Environment Agency website and shows the flood zones in the area.

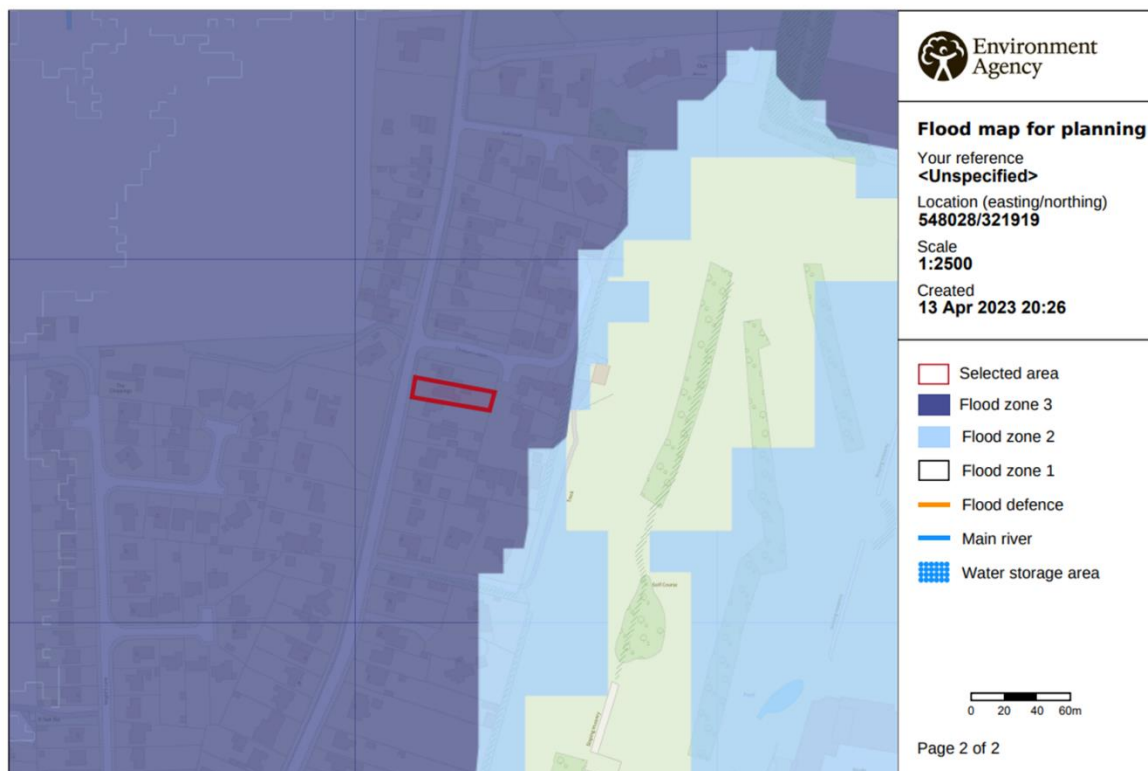

© Environment Agency copyright and / or database rights 2022. All rights reserved. © Crown Copyright and database right 2022. Ordnance Survey licence number 100024198.

It can be seen that all the properties along New Road, Sutton Bridge are in Flood Zone 3.

Application Site

The development is located on the western side of the River Nene. The National Grid Reference of the site is 548028, 321919.

The location of the site is shown on the plan at the end of this document.

As the site is within a defended area the proposed development can be considered to be within Flood Zone 3(a) as detailed on the Environment Agency's flood zone maps without defences, as defined in Table 1 of the Technical Guidance.

Applying the flood risk vulnerability classification in Table 2 of the Guidance, a development of a dwelling house is classified as "more vulnerable".

Table 3 of the Guidance is shown below:

Flood Zones	Flood Risk Vulnerability Classification				
	Essential infrastructure	Highly vulnerable	More vulnerable	Less vulnerable	Water compatible
Zone 1	✓	✓	✓	✓	✓
Zone 2	✓	Exception Test required	✓	✓	✓
Zone 3a †	Exception Test required †	X	Exception Test required	✓	✓
Zone 3b *	Exception Test required *	X	X	X	✓*

Therefore it can be seen that for "More vulnerable" development the sequential and the exception tests need to be applied to the development.

Sequential Test

The aim of the Sequential Test, as set out in the Planning Practice Guidance, is to ensure that a sequential approach is followed to steer new development to areas with the lowest probability of flooding. The flood zones as defined in the Strategic Flood Risk Assessment for the area provide the basis for applying the Test. The aim is to steer new development to Flood Zone 1 (areas with a low probability of river or sea flooding). Where there are no reasonably available sites in Flood Zone 1, local planning authorities in their decision making should take into account the flood risk vulnerability of land uses and consider reasonably available sites in Flood Zone 2 (areas with a medium probability of river or sea flooding), applying the Exception Test if required. Only where there are no reasonably available sites in Flood Zones 1 or 2 should the suitability of sites in Flood Zone 3 (areas with a high probability of river or sea flooding) be considered, taking into account the flood risk vulnerability of land uses and applying the Exception Test if required.

The whole of this area on the west side of Sutton Bridge, as can be seen from the map on page 2 of this report, is in Flood Zone 3. Therefore it would be difficult to find a similar site for development within the town boundary that is in a lower flood zone.

The safety of the development will be delivered by ensuring the floor level of the proposed new dwelling is above predicted residual flood levels for this area.

The South Holland District Council Core Strategy states that there is a limited number of sites outside the town of Spalding available for residential development. Therefore there is a requirement for further land to be brought forward and used for residential development.

Therefore I consider that the sequential test has been passed.

Exception Test

The Sequential Test has demonstrated that it is not possible, consistent with wider sustainability objectives, for the development to be located in zones with a lower probability of flooding. Therefore the Exception Test must be applied and for this to be passed:

- It must be demonstrated that the development provides wider sustainability benefits to the community that outweigh flood risks, informed by the Strategic Flood Risk Assessment; and
- A site-specific flood risk assessment must demonstrate that the development will be safe for its lifetime taking into account of the vulnerability of its users, without increasing flood risk elsewhere, and where possible will reduce flood risk overall.

Both parts of this test must be satisfied in order for the development to be considered appropriate in terms of flood risk. There must be robust evidence in support of every part of the test.

The first section will be demonstrated by the Supporting Planning Statement and compliance with South Holland District Council's planning policies.

This flood risk assessment will demonstrate that the development will be safe for its lifetime and it will not increase flood risk elsewhere.

Strategic Flood Risk Assessment

The Strategic Flood Risk Assessment (SFRA) written for the South Holland District Council (SHDC) in 2010 provides details of the actual flood risk in the Council's area. This information has not been updated and reference to the maps in this document give the following information for the actual flood risk and hazard at the site for the 1% fluvial event and 0.5% tidal event.

For the present day	Depth of flooding ... zero
	Extent of flooding .. Low or medium
	Hazard..... zero
	Velocity Nil

For year 2115 Depth of flooding ...500mm – 1.0m
 Extent of flooding .. high
 Hazard..... Significant
 Peak Velocity 0.1 – 0.25 m/sec

The maps showing the residual flood hazard were revised in the 2016 update of the South Holland District Council Strategic Flood Risk Assessment which can be found on the website of the South East Lincolnshire Joint Planning Committee. The hazards are as follows for the 1% fluvial or 0.5% tidal event probability:

For the present day Depth of flooding.... 0 – 250mm
 Extent of flooding ... High
 Hazard Danger for some (0.75 – 1.25)
 Velocity 0 – 0.3 m/sec

For the year 2115 Depth of flooding ...500mm – 1.0m
 Extent of flooding ...High
 Hazard Danger for most (1.25 - 2.0)
 Velocity 0.3 – 1.0 m/sec

Figure 16 of the general maps shows that the site is not within the rapid inundation zone for the present day but will be in the predicted rapid inundation zone in 2115.

Maximum flood level and bank levels in the River Nene

The maximum levels in this tidal section of the River Nene 430 metres east of the site are as follows:

	2007	2115
Peak 1 in 200 year level	5.86m OD	6.20m OD
Peak 1 in 1000 year level	7.00m OD	7.35m OD

Levels of the defence north of the A17 bridge are approximately 6.30m OD. However there is a low section adjacent to the bridge itself at a level of 5.95m OD.

Existing Flood Alleviation Measures

The site is within a defended flood plain, as defined in Appendix 1 of the Environment Agency's "Policy and Practice for the Protection of Flood Plains", which is considered to be passive until such time that a flood greater than the defences can withstand occurs. The likelihood of flooding occurring due to overtopping or failures of the defences is considered to be very low.

The site is located approximately 430 metres from the tidal section of the River Nene, which is maintained by the Environment Agency.

There are watercourses in the area that are maintained by South Holland IDB.

Existing Ground Levels

Levels have been taken on the site and these levels are shown on the plan on page 12 of this report. A section west to east has been drawn showing these levels which can be found on page 9 of this report.

The road level in New Road immediately in front of the property is 3.90m ODN. The level of the front of the site and around the perimeter of the existing building is approximately 3.70m ODN. The rear garden is lower with levels between 3.25m and 3.50m ODN, the lowest levels being along the rear boundary of the garden.

The floor level of the existing property as measured on the cill of the left hand side front door is 3.96m ODN. The rear extension is lower than this level, but access was not possible to check the internal floor levels inside the building.

Potential Sources of Flooding

The potential sources of flooding to the site are:-

1. Failure or overtopping of tidal defences of the River Nene.
2. High water levels in IDB drainage channels.
3. Localised flooding from failure of on site drainage.

1. Failure or overtopping of tidal defences of the River Nene

The west bank of the River Nene is approximately 430 metres east of the site of the proposed development, and the Wash Banks are approximately 7km north of the site at their nearest point. The hazard from the River Nene east of the development site if a breach occurred in the length of bank north of the A17 bridge will be considered to be the major risk to the site.

The maps in the 2010 SFRA do not predict any actual flooding to this area of Long Sutton in a 1 in 200 year event for the present day. In the same event in 2115 between 500mm and 1.0 metre depth of flooding is predicted.

The maps in the updated SFRA (available on the South East Lincolnshire Joint Strategic Planning website) predict flood depths of between 500mm and 1.0 metre on the area of the site where the new building is proposed if a breach were to occur in a 1 in 200 year event in 2115. It is likely that the EA will undertake further bank raising within the next 100 years to ensure that there is a continuing 1 in 200 year defence to Long Sutton and Sutton Bridge.

The predicted hazard will be mitigated by raising ground floor levels of the proposed building above the predicted flood level in a 1 in 200 year event in 2115.

2. High Water Levels in IDB drains

Although the whole of this area is below high tide level in the Wash and the River Nene, the retained water levels in the drainage channels ensure that the risk of flooding is extremely low. South Holland IDB maintains a system of sluices, pumping stations, and drainage channels which convey surface water into the River Nene and the wash and control water levels throughout the South Holland IDB area.

This area of Sutton Bridge is within the Westmere catchment of the South Holland IDB which outfalls through Westmere Sluice into the tidal River Nene during low tide levels. It is assumed that the surface water from this area of New Road discharges into dykes or surface water sewers which flow westwards to discharge into the IDB drain north of Allenby's Chase. This flows northwards and discharges into the Westmere Creek. Westmere Creek flows north eastwards to the outfall sluice on the bank of the River, where it discharges during periods of low tide into the tidal River Nene.

The channels maintained by South Holland IDB in urban areas are classified as high priority watercourses and as such receive a higher maintenance priority.

There are possibilities of failure of outfall sluices, but these are mitigated by the high level of maintenance given to these structures by the IDB. If a failure did occur the IDB would immediately be warned of the problem by their telemetry system and take action to repair the fault or to bring in temporary pumps to reduce the risk of any flooding in the area. Similarly any failures of culverts or other blockages would be dealt with immediately.

IDB systems are designed to provide a freeboard of between 600mm and 1000mm to all land in a 1 in 10 year return period rainfall event. This normally provides a standard of service of between 1 in 50 years and 1 in 100 years against flooding. In an extreme event water levels will rise but this will be a slow process and it would be at least 24 hours before levels were high enough to begin to flood low land in the area, and after this the level of the flood water would need to rise another 1.0 metre before the development site would be affected.

Therefore the risk of flooding from IDB drainage channels can be considered to be extremely low, and will be adequately mitigated by the raising the ground floor levels to the levels required to be above the 1 in 200 year tidal flood.

3. Localised Flooding due to failure of surface water drainage on the site

It is anticipated that the surface water from the roof of the proposed building will be discharged into soakaways east of the new building (in the rear garden).

The raising of ground floor levels to the level required above the 1 in 200 year tidal flood level will adequately mitigate the risk of surface water flooding to the new building.

Extent of known Flooding

During the preparation of this assessment, no evidence was discovered of the site or any of the adjoining properties having been flooded in the past.

Probabilities and Trends of Flooding

The probability of this development flooding from Environment Agency main river is very low. In an extreme event any effect on this location would not be sudden and there would be time for residents to be warned and to take precautionary measures to limit the impact of any flooding that may occur.

Residual Risk – Extreme Events

The residual risk from extreme events is very low on this site. The major risk to the site is from a breach or overtopping of the tidal defences

The risk of this happening in this case is low and the hazard from any flooding is also low.

Climate Change

The predictions of flood depths for this flood risk assessment use information provided by the Environment Agency which was produced in 2006. The EA have issued new guidance on recommended contingency allowances for predicted sea level rises, fluvial flows and rainfall intensities which from 19th February 2016 needs to be considered in the FRA. The effects of these new recommendations are considered in Appendix A of this report (pages 13 to 16). It is concluded that no extra mitigation measures are necessary to comply with the new guidance on climate change.

South East Lincs Advice Matrix

Advice can be found on the recommended mitigation required by referring to a spreadsheet on the South East Lincolnshire website. As the development is in flood zone 3 and the flood hazard is “danger for most” (1.25 - 2.0) reference should be made to Category D8 which states:

The Environment Agency requires direct consultation on proposals in this hazard zone. The NPPF requires that the proposal is accompanied by a Flood Risk Assessment which contains evidence that appropriate mitigation measures / flood resilience techniques have been incorporated into the development.

The applicant is advised to refer to the following document for information on flood resilience and resistance techniques to be included “Improving Flood Performance of New Buildings – Flood Resilient Construction (DCLG 2007)”

Finished floor levels (FFL) should be informed by the predicted flood depth maps and set as required below (single storey proposals must use the 0.1% event, 2115 scenario, for setting FFLs).

Depths 500mm to 1.0m

FFL must be set 1.0m above ground level with flood resilient construction to a height of 300mm above the predicted flood depth.


Summary of Risk of Flooding to the Site

The main risk of flooding to the site is if a breach were to occur in the west bank of the tidal River Nene. The risk of this happening along this section of bank can be considered to be low. The bank has a wide top and bank slopes are not steep.

The relevant part of the map in the SFRA showing the predicted peak depths in this area if a breach occurred in the west bank of the River Nene in 2115 in a 1% fluvial and 0.5% tidal event probability is shown on the next page.



The map above predicts flood depths of between 500mm and 1.0 metre on most of the site and between 1.0 metre and 2.0 metres in a small part of the rear garden. A section west to east across the site has been drawn which shows the existing ground levels and the predicted flood depths. This is shown below.

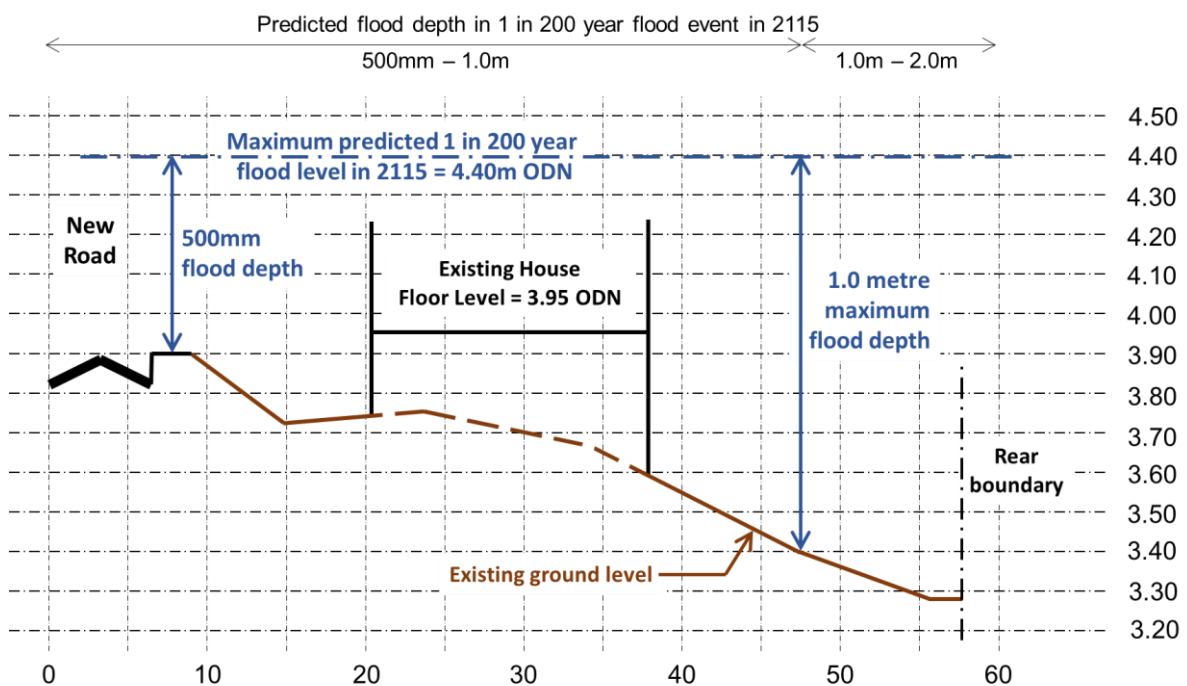

The 1 in 200 year predicted flood depth in 2115 at a distance of 47.5 metres is 1.0 metre and therefore the predicted 1 in 200 year flood level can be calculated to be 4.40m ODN.

As the ground floor level will be raised 550mm above the existing road level in New Road the possibility of the proposed building being flooded from IDB systems can be considered to be remote.

Recommendations

In any area at risk of flooding it is recommended that all new dwellings should be of two story construction with all bedrooms at first floor level. This will provide a refuge for residents if the building becomes flooded after a major breach of the tidal bank, and ensure there is no danger to residents when they are asleep.

The finished ground floor level of the proposed new dwelling should be raised to be a minimum level of 4.45 metres ODN which is 550mm above the level of New Road directly west of the site. This level is 50mm above the predicted 1 in 200 year flood level in 2115.

Flood resilient construction should be incorporated to a minimum height of 300mm above the predicted flood level.

Occupiers of the property should register with the Environment Agency's Floodline Warnings Direct Service.

Surface water from the roof of the proposed property should ideally be discharged into a soakaway which should be designed to BRE Digest 365 and approved under Building regulations.


All future owners and occupiers of the building should be given a copy of the Flood Risk Assessment so that they are fully aware of the risk of flooding in this area.

S M HEMMINGS B Sc C Eng MICE MIWEM


stuart.hemmings@btinternet.com

16th May 2023


LOCATION PLAN

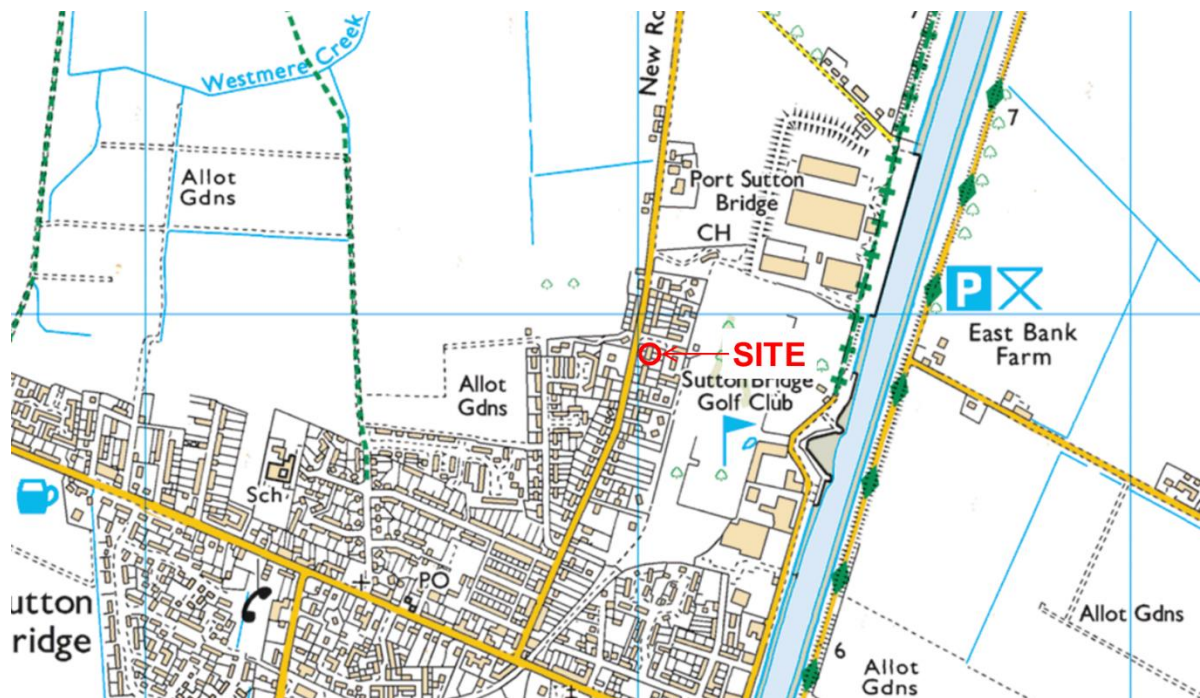


PLAN OF IDB DRAINS

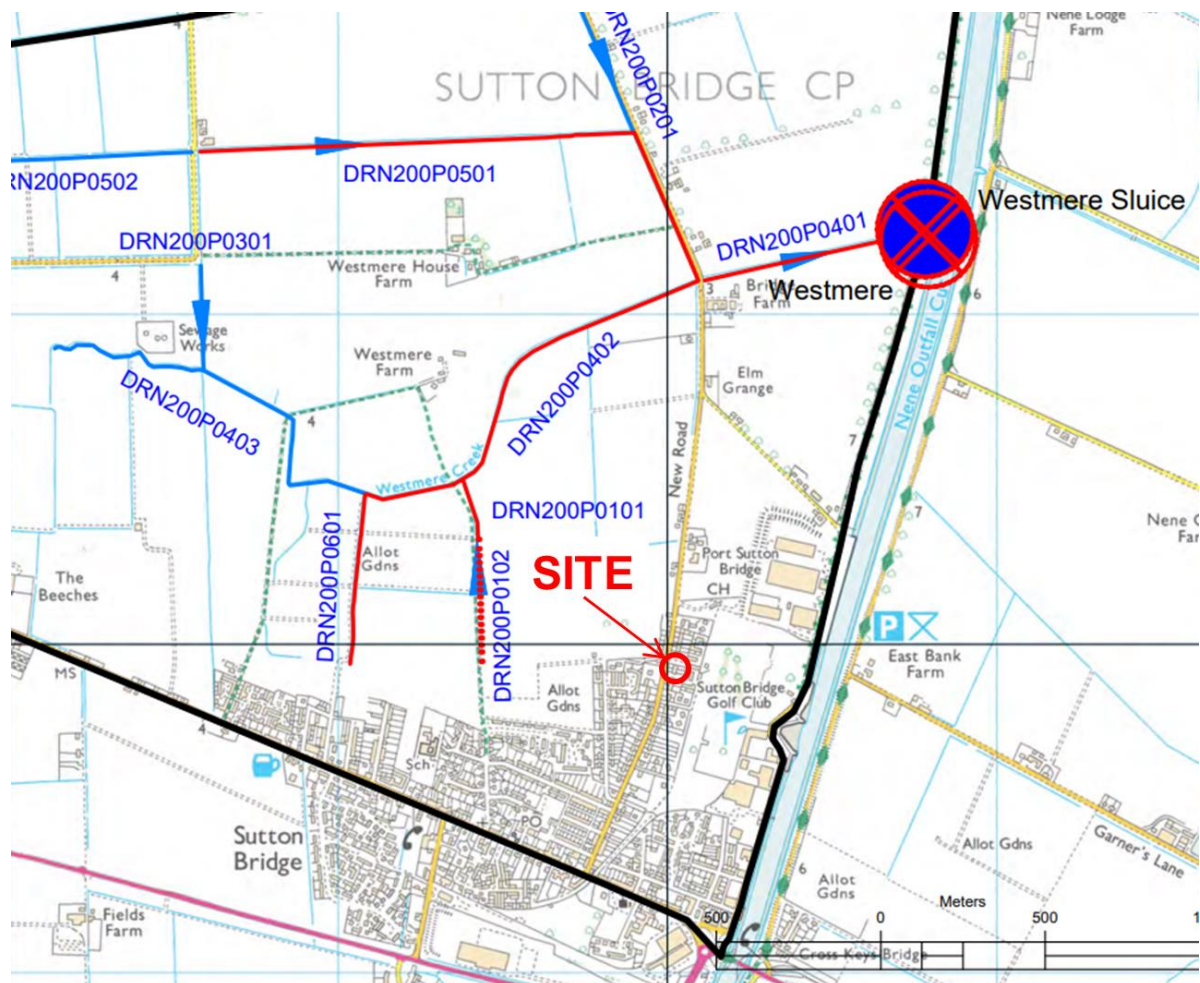

PLAN OF GROUND LEVELS MEASURED ON THE SITE

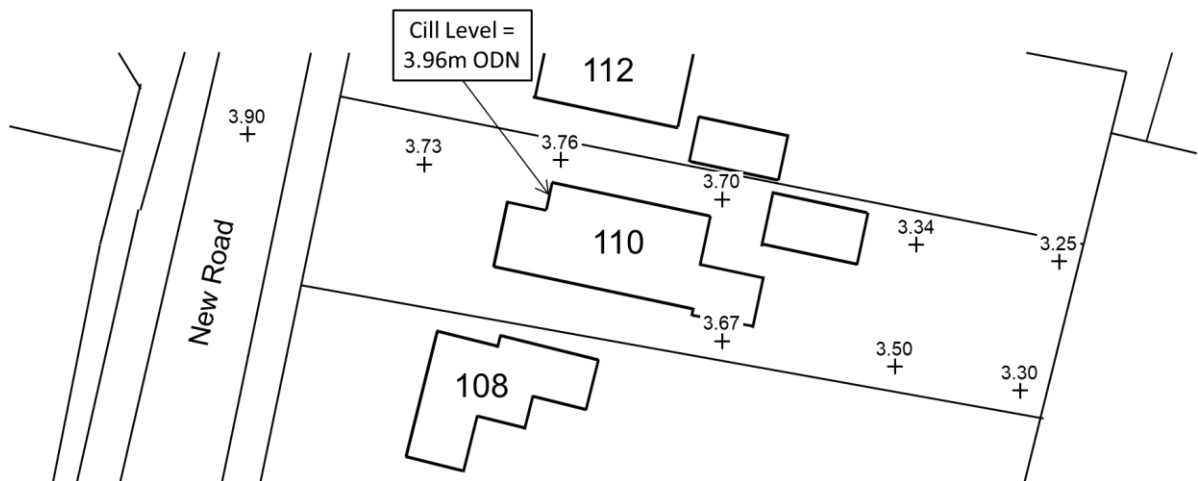

BLOCK PLAN OF PROPOSED DWELLING

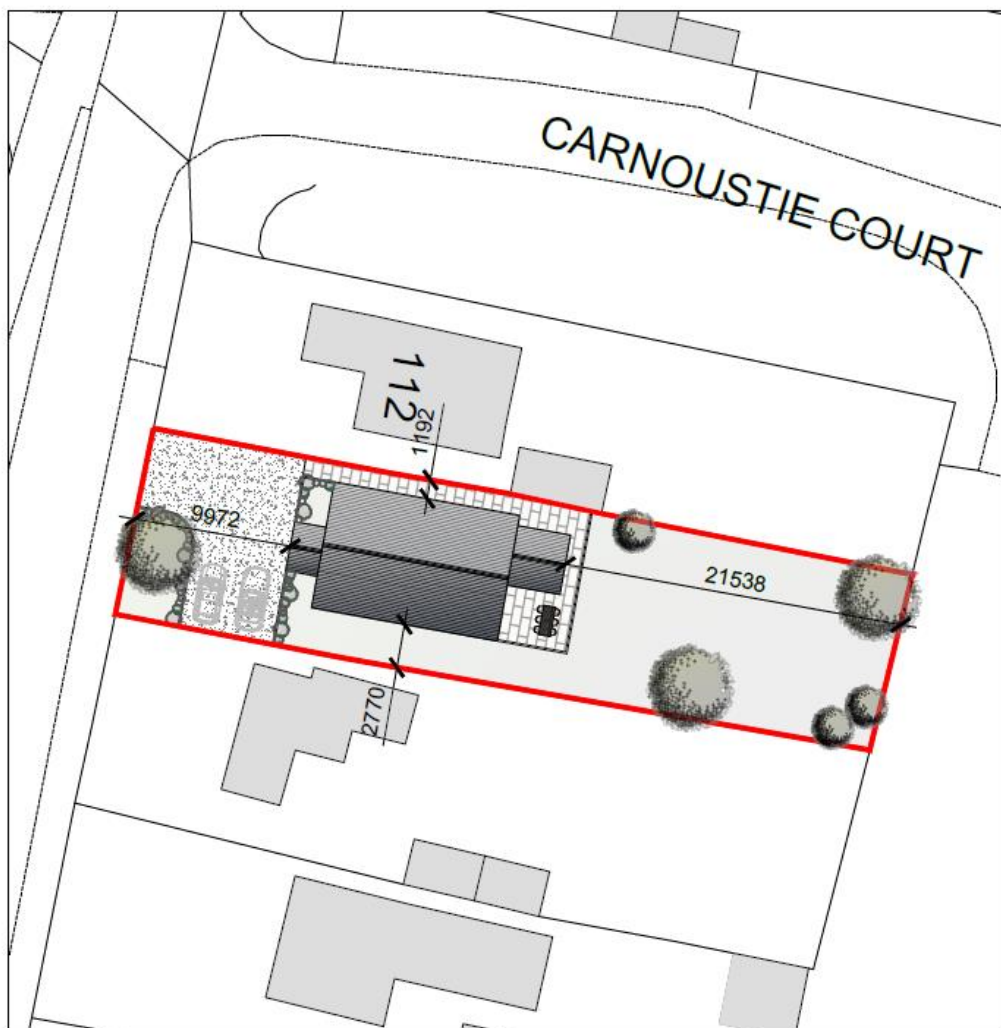

APPENDIX A CLIMATE CHANGE

The Environment Agency has issued revised guidance on climate change and have now stated that the new predictions should be considered and incorporated into all flood risk assessments produced after 19th February 2016.

Listed below are the climate change allowances in three documents:

- South Holland SFRA
- EA guidance (2013)
- Revised EA guidance

The recommendations in each document are shown below.

2010 South Holland DC SFRA

The SHDC SFRA states that the the following allowances have been made for climate change:

4.4 Climate Change

Scenarios for the years 2055 and 2115 include for climate change contingency allowances to the amount suggested by PPS25¹. These allowances are expressed in Table 2. Percentage increases are relative to the present-day.

Table 2 – Adopted Climate change contingency allowances

Parameter	Year 2055	Year 2115
Sea level rise (m)	+ 0.33	+ 1.14
Extreme wave height	+ 10%	+ 10%
Peak river flow and volume	+ 20%	+ 20%
Peak rainfall intensity	+ 20%	+30%

Where flows arise from pumping rather than natural run-off, notably in the Vernatt's Drain and for the Fenland subcatchments of the South Forty Foot Drain, peak flow rates for future eras have been taken as equal to current rates since this SFRA assumes all flood risk management measures will remain in their current state.

2013 Guidance to Planners

Guidance to planners was issued by EA in September 2013

Table 1: Recommended contingency allowances for net sea level rises (Net sea level rise (mm per year) relative to 1990)

	1990 to 2025	2025 to 2055	2055 to 2085	2085 to 2115
East of England, east midlands, London, south-east England (south of Flamborough Head)	4.0	8.5	12.0	15.0
South-west England	3.5	8.0	11.5	14.5
North-west England, north-east England (north of Flamborough Head)	2.5	7.0	10.0	13.0

Table 2: Recommended national precautionary sensitivity ranges for peak rainfall intensity, peak river flow, offshore wind speed and wave height

Parameter	1990 to 2025	2025 to 2055	2055 to 2085	2085 to 2115
Peak rainfall intensity	+5%	+10%	+20%	+30%
Peak river flow	+10%	+20%		
Offshore wind speed	+5%		+10%	
Extreme wave height	+5%		+10%	

Revised 2016 EA Guidance

Table 1 peak river flow allowances by river basin district (use 1961 to 1990 baseline)

River basin district	Allowance category	Total potential change anticipated for '2020s' (2015 to 39)	Total potential change anticipated for '2050s' (2040 to 2069)	Total potential change anticipated for '2080s' (2070 to 2115)
Anglian	Upper end	25%	35%	65%
	Higher central	15%	20%	35%
	Central	10%	15%	25%

For more vulnerable development in flood zone 3(a) the higher central and upper end should be used to assess the range of allowances.

Table 2 peak rainfall intensity allowance in small and urban catchments (use 1961 to 1990 baseline)

Applies across all of England	Total potential change anticipated for 2010 to 2039	Total potential change anticipated for 2040 to 2059	Total potential change anticipated for 2060 to 2115
Upper end	10%	20%	40%
Central	5%	10%	20%

Table 3 sea level allowance for each epoch in millimetres (mm) per year with cumulative sea level rise for each epoch in brackets (use 1990 baseline)

Area of England	1990 to 2025	2026 to 2050	2051 to 2080	2081 to 2115	Cumulative rise 1990 to 2115 / metres (m)
East, east midlands, London, south east	4 (140 mm)	8.5 (212.5 mm)	12 (360 mm)	15 (525 mm)	1.24 m

Table 4 offshore wind speed and extreme wave height allowance (use 1990 baseline)

Applies around all the English coast	1990 to 2050	2051 to 2115
Offshore wind speed allowance	+5%	+10%
Offshore wind speed sensitivity test	+10%	+10%
Extreme wave height allowance	+5%	+10%
Extreme wave height sensitivity test	+10%	+10%

Effects on Predictions of Flood Risk in FRA

The FRA has identified the main source of flooding where the new climate change recommendations could affect the predictions of flood levels in 2115 at the development site is flooding from the tidal River Nene

The contingency allowance in metres for the years 2055 and 2115 using 1990 as a baseline in the SFRA compared with the guidelines is as follows

Year	SFRA	2013 guidance	Revised 2016 guidance
2055	0.33	0.395	0.412
2115	1.14	1.205	1.24

Therefore it can be seen that the revised guidance increases the maximum allowance for sea rise in 2115 by 100mm. This will not have the effect of increasing the predicted flood level at the site in a 1 in 200 year breach event in 2115 by the maximum of 100mm, but it will probably be only between 10mm and 50mm. It is unlikely that this increase will significantly change the maps of flood risk at present issued by the Environment Agency.

Flooding from IDB drainage system

As the development is in flood zone 3 and is classed as more vulnerable, the advice from the Environment Agency is that the higher central climate change allowance, which is 35%, should be considered. After considering the effects of this increase the upper end allowance, which is 65%, should be considered to assess the effect of this.

IDB's have been using an allowance of 20% for climate change over the past few years in their assessments and modelling of their systems. Generally IDB's are happy that their systems provide a 1 in 100 year standard to most urban areas at the present time.

South Holland IDB, and all IDB's, are aware that climate change will affect the operations of pumping stations, sluices and drainage channels. Pumping stations and sluices only have a 30 year life and will need to be refurbished or rebuilt within this timespan. It is assumed that South Holland IDB will continue to review the modelling they have already carried out and when the Board consider these refurbishments adequate arrangements will be made to incorporate the latest climate change projections in order that the Board continues to provide the same standard of service as the present day.

Therefore it is considered that the mitigation proposed for the development, with the recommendation that the finished ground floor level should be raised to a minimum level of 4.45m ODN which is 550mm above the level of New Road, is satisfactory.