



EAST ELEVATION



SOUTH ELEVATION

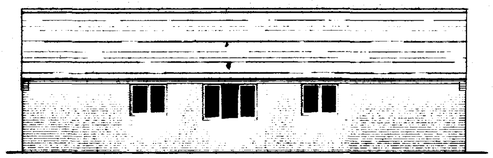

WEST ELEVATION

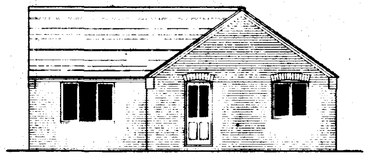

NORTH ELEVATION

SURFACE WATER DRAINAGE.
115 dia. half round rainwater gutters to 65 dia. rainwater pipes 82.4 dia. underground pipes flexibly joined to a fall of 1:170 pipes bedded and surrounded in pea gravel and discharged to 1.2m dia. soakaway min. 5.0m to edge from dwelling.

GLAZING.
Double glazed propertie throughout (minimum 6mm air cap to all units). All glazing between F.F.L. and 800mm high and between F.F.L. and 1900mm high in doors and side lights to be safety glass to B.S. 6206. All windows / doors to be draught sealed.

VENTILATION.
All windows to have opening lights to give the equivalent of 1/ 20th the floor area. Provide background ventilation to habitable rooms min. 8000mm sq permanent free air ventilation per room. To all other rooms provide min 4000 sq. All following rooms to have in addition to above Wall / Window mounted mechanical extractor fan. Kitchen to extract min 60 litres per second. Utility room to extract min. 30 litres per second. Bathrooms to extract min. 15 litres per second which may be operated intermittently. W.C. to extract min 6 litres per second.

HOT WATER AND SPACE HEATING.
Install wall mounted Oil fired condensing boiler with flue assisted balanced flue. Externally fit durable wire guard over flue outlet. Provide timer switch and suitable thermostat to dwelling or fit thermostatic valves to all radiators. Hot water storage system to be thermostatically controlled with timer switches and be vented. All hot water storage tanks and pipes to be insulated to B.R. LI. part 3.

CEILINGS.
200mm glasswool insulation total thickness. 100mm between rafters & 100mm over. Joists 12.7mm (approx "duplex" plasterboard 9mm skim finish: Provide min 38 x 38 noggins to all plasterboard edges. All joints to be taped and filled. Provide access trap to roof space: opening to be lined with 25 x 25 planted stops. Access panel to be 12mm ply with layer of 12.7mm Firelite board fixed to face. Draught seal all round

WALLING.
265 cavity walling to consist of face brickwork to B.S. 3921:1974 for clay bricks and B.S. 187:1978 for calcium silicate bricks: 65 cavity: bedd into cavity Rockwool cavity wall batts insulation boards in accord. with makers instructions and agrement cert' No.85 / 1087. 100mm Tarmac Hemelite solid insulation blocks or similar: Cavity walls tied together using galvanised iron twist ties set 900 horizontally and 450 vertically to B.S. 1243:1978 wall ties positioned as 300 vertical centres at all unbonded closures of cavity: Close cavities with "Thermabate" preformed closer and provide bitumen felt DPC to C.P. 121: External walls to have max. "U" value of 0.45 W/ m2 deg. C.: Internal walls of 100mm Tarmac Hemelite solid insulation blocks and to receive 10mm S/ C render and 3mm skim. Stud walls to consist of 38 x 89mm c/l.s studs at 400mm c/ c. both sides to be clad with 12.7mm plasterboard and skim. 100mm glasswool infill between studs.

SUB STRUCTURE WALLING.
100mm dense concrete blocks to B.S. 6073 pt.1 1981: DPC to external wall positioned in accordance with CP 102 min. 150 above finished ground level. Weak mix concrete infill to base of cavity no closer than 225 to DPC. All brickwork below DPC to be F.L. quality.


GROUND FLOOR CONSTRUCTION.
Strip all vegetable soil and lay floor as follows: 70mm sand and cement screed with chicken wire reinforcement on 500g polythene D.P.M. on 90mm Polystyrene insulation board, on 1200g polythene D.P.M. lapped continuous with D.P.C. to min. 100mm. lay 300mm wide D.P.M. strip into D.P.C. to lap floor D.P.M. All on 100 concrete oversite: Concrete mix GEN4 to B.S. 5328: pt1 1991: 150 blinded and consolidated hardcore. Alternative: Floor construction as above but 19mm T&G flooring grade chipboard on 50mm Polystyrene insulation board laid on oversite in lieu of screed and insulation board. Ensure 12mm expansion gap to perimeter of boarding. Use treated chipboard to kitchen and bathroom.

FOUNDATIONS.
Under walls as shown provide strip concrete foundations as follows: Under 265 cavity walls provide 225 x 700 and under 100 walls provide 225 x 450 all GEN4 mix to B.S. 5328: pt1 1991. All foundations taken down to bear on load bearing strata min. depth of 600 to top of foundations: should shrinkable soil conditions be found on site then foundations shall be taken down to a depth of 1 metre below ground level. Where internal walls are taken up off floor then thicken out slab to 225 x 450 or if considered necessary be taken down to 225 x 450 foundation.

LINTELS.
All lintels to be manufactured by Ancon L.G. and to be installed in accordance with makers' instructions, and to have min. end bearing of 150mm and at external positions to have cavity tray D.P.C. to CP 121: Internal lintels to be L.G. 100 Dia. type. Provide Perp-end weep holes and stopends to cavity tray.

FOUL DRAINAGE
Inspection chamber construction to be "Osma" and installed in accordance with makers' instructions with the internal diameter related to the depth in accordance with B.S. 8301:1985. Foul drainage pipes to be 100mm dia. UPVC. to B.S. 4660:1989 flexibly jointed and laid to makers' instructions to a fall of 1:170 bed and surround with 10mm pea gravel. Where pipes pass under floors encase in 150mm pea gravel: Where pipes pass under drives surround in 150mm concrete with flexi joints to correspond with joints in pipework. Provide 65 x 100 prestressed concrete lintel bridging where pipes pass through walls, allow 50mm gap around pipe, opening marked both sides of wall with rebated sheet material: Soil and vent. pipes to be 100mm int. dia. PVC to B.S. 4514: 1969 and to extend 900mm above window head terminations with PVC balloon. Waste pipes to be 40mm dia. PVC to B.S. 5943: 1979 complete with rodding eyes at every change of direction: Bath, basins and sink to have 75 deep seal traps.

SMOKE DETECTORS.
Provide mains operated self-contained smoke alarms to B.S. 5446: pt.1. in positions shown on plan.

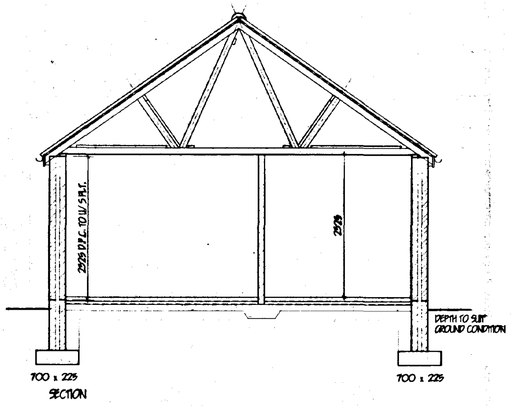

SECTION

LIMITATIONS.
This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Planning / Building Regulation approval. The drawing must not be used as a contract document alone.
All dimensions shall be taken from site from actual work. Under no circumstances shall measurements be scaled from this drawing for construction or working purposes. All given dimensions shall be checked by the Builder / Contractor and will be his responsibility from commencement of site works.
The works will not be supervised or inspected on site by C.A.D. or any representative thereof. It is the client or their appointed agents responsibility to control workmanship, substitution of materials, adherence to specification, variations to contract etc.

COPYRIGHT RESERVED.
Copies of this drawing must be made only with the written permission of Cooper Architectural Design.

STANDARDS.
All materials to be new unless otherwise stated and all components and materials etc. to be used fitted and installed etc. in strict accordance with manufacturers instruction and relevant Code of Practice.
Materials shall conform to appropriate British Standard Specification or BBA Certificate or European Code equivalent.

HEALTH & SAFETY.
The Employer / Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health & Safety Legislation for Building Sites and Work Places.
The Employer / Client is advised that should the works need to comply with the Construction Design and Management Regulations an independent Planning Supervisor will be required.

SCOPE OF THE WORKS.
The works shall comprise of all that is shown on the drawing and details. Work that may not be specifically shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included.

revision	date	init.	revision details.


COOPER ARCHITECTURAL DESIGN
BRONAVON, MOCKLESGATE,
FLEET, SPALDING, LINC'S PE12 8LF
Tel/Fax : 01406 423782 Mobile 0410 290952

Client
MR PRICE


Project
PROPOSED 3 BEDROOMED BUNGALOW.
SOUTHEAL BANK,
CODNEY HILL,
SPALDING,
LINCS.

Drawing.


Scale	Drawing No.
1:50 1:100	
Date. APRIL '98	Drawn. J.C.

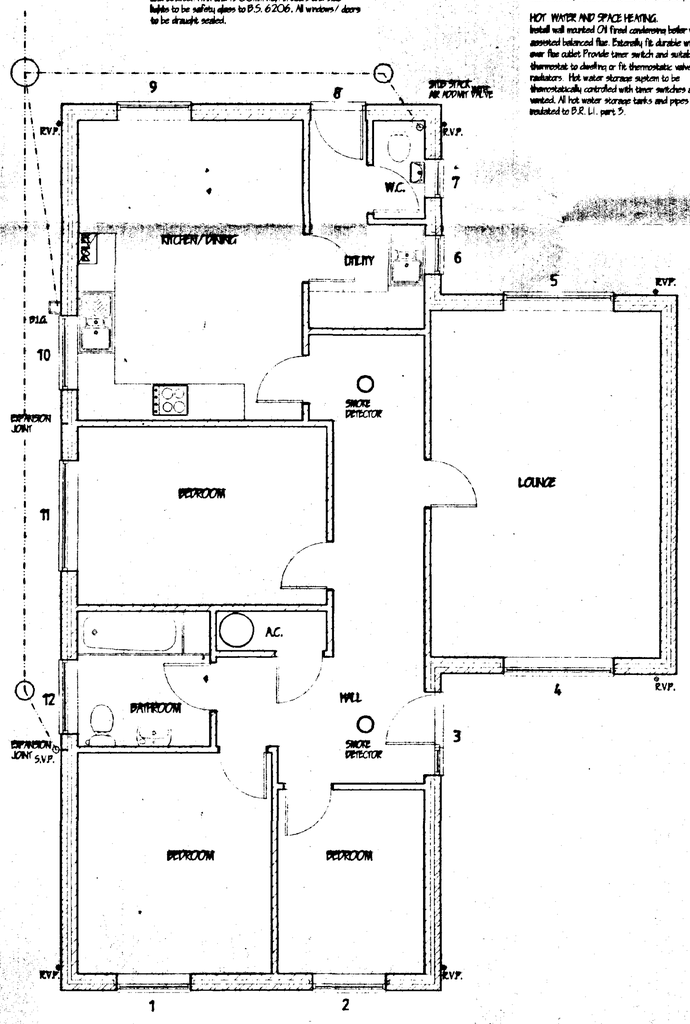

FLOOR PLAN

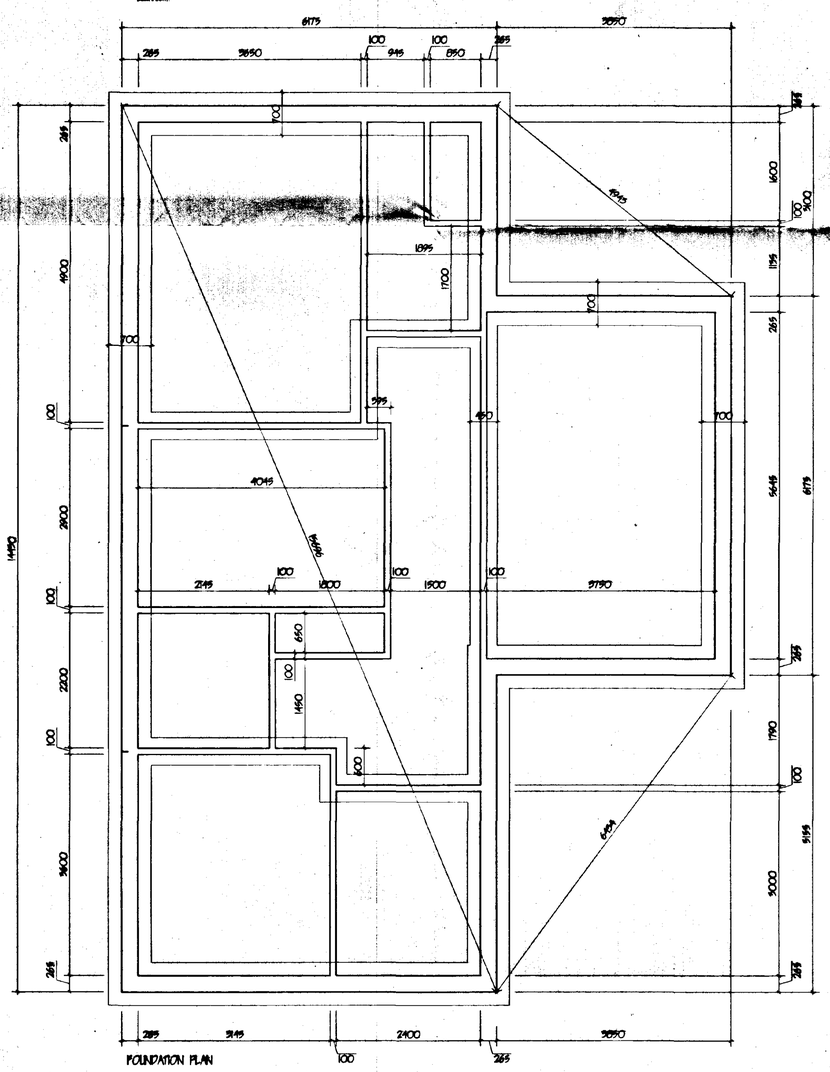

FOUNDATION PLAN

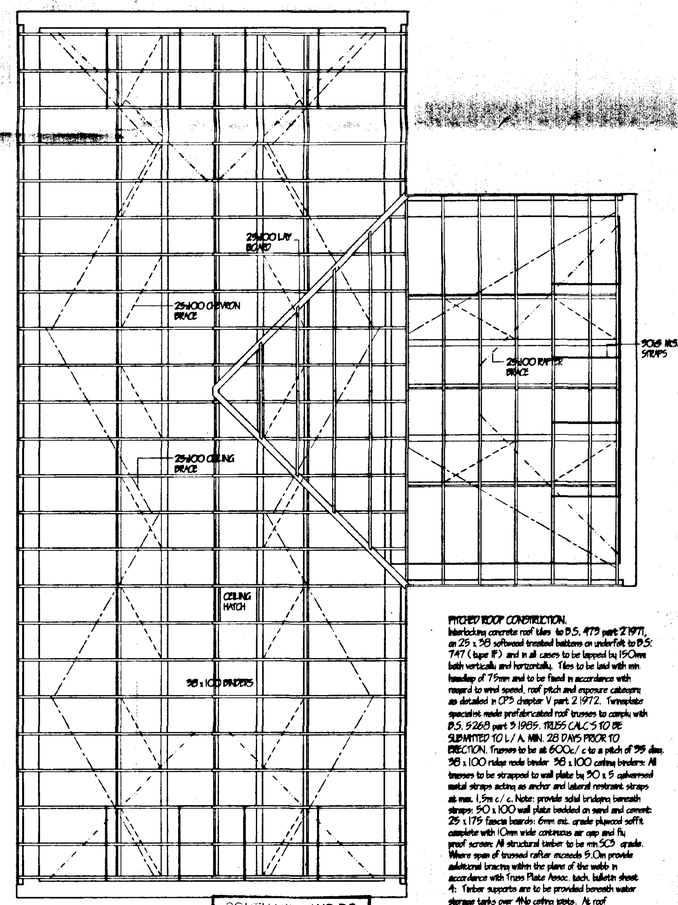

ROOF PLAN

PITCHED ROOF CONSTRUCTION.
Interlocking concrete roof tiles to B.S. 473 part 2 1971, on 25 x 149 softwood treated battens on underfelt to B.S. 747 (type 1F) and in all cases to be lapped by 150mm both vertically and horizontally. Tiles to be laid with min headlap of 75mm and to be fixed in accordance with regard to wind speed, roof pitch and exposure categorie as detailed in CP3 chapter V part 2 1972. Formedotes spaced ins. made profabricated roof trusses to comply with B.S. 5268 part 3 1985. TRUSS CALCS TO BE SUBMITTED TO L / A MIN. 28 DAYS PRIOR TO ERECTION. Trusses to be at 600c/ c to a pitch of 35 deg. 38 x 100 ridge node binder 38 x 100 centre binders: All trusses to be strapped to wall plate by 30 x 5 galvanised metal straps acting as anchor and lateral restraint straps at max. 1.5m c / c. Note: provide solid bridging beneath straps: 50 x 100 wall plate bedded on sand and cement: 25 x 175 fascia boards: 6mm ext. grade plywood soffit complete with 10mm wide continuous air gap and fly proof screen. All structural timber to be min SC5 grade. Where span of trussed rafter exceeds 9.0m provide additional bracing within the plane of the webs in accordance with Truss Plate Assoc. tech. bulletin sheet 4: Timber supports are to be provided beneath water storage tanks over 4No centres spots. At roof intersections provide 25 x 100 lay boards and dwangs trusses at 600 c/ c : Install code 4 lead valley liner. Close cavity at plate level.

SOUTH HOLLAND DC
HOUSING & PLANNING
09 APR 1998
Ref: S98/0188

DETERMINED
PLAN