

**FLOOD RISK ASSESSMENT
FOR A CHANGE OF USE AT
FRENCH DROVE, GEDNEY HILL**

FINAL REPORT

ECL1638/STATUS DESIGN

DATE SEPTEMBER 2025

ELLINGHAM CONSULTING LTD

Email: tim@ellinghamconsulting.co.uk

CONTENTS

1.0 INTRODUCTION

2.0 SITE LOCATION AND DESCRIPTION

- 2.1 Site Location
- 2.2 Existing Site
- 2.3 Proposed Development
- 2.4 Local Development Documents
- 2.5 Available Flood Risk Information

3.0 FLOOD RISK VULNERABILITY

- 3.1 The Sequential and Exception Test
- 3.2 Vulnerability Classification
- 3.3 Application of the Sequential Test

4.0 SITE SPECIFIC FLOOD RISK

- 4.1 Local Flood Assets
- 4.2 Sources of Flooding
- 4.3 Probability of Flooding
- 4.4 Historic Flooding
- 4.5 Climate Change
- 4.6 Residual Risks

5.0 FLOOD RISK MITIGATION

- 5.1 Summary of Risks
- 5.2 Mitigation Measures

6.0 CONCLUSIONS

ATTACHMENT 1 – Site Plan (Dwg SD25/023/1)

DISCLAIMER

This document has been prepared solely as a Flood Risk Assessment in support of a planning application for a change of use at French Drove, Gedney Hill. "Ellingham Consulting Ltd" accepts no responsibility or liability whatsoever for any use made of this document other than by the client Status Design for the purposes it was originally commissioned and prepared. All comments and opinions made are based upon information available to "Ellingham Consulting Ltd" during the necessary investigative process, and the conclusions and recommendations, could therefore, differ in the event of material subsequently being found erroneous, incomplete, or misleading. "Ellingham Consulting Ltd" therefore, accepts no liability should this prove to be the case.

1.0 INTRODUCTION

This Flood Risk Assessment has been prepared in accordance with National Planning Policy Framework (NPPF) and supporting planning practice guidance (PPG) on Flood Risk and Coastal Change.

In areas at risk of flooding or for sites of 1 hectare or more, developers are required to undertake a site-specific Flood Risk Assessment to accompany an application for planning permission. This Flood Risk Assessment has been produced on behalf of Status Design in respect of a development that consists of the change of use of a storage building to be 100% domestic storage at 26 Station House, French Drove, Gedney Hill.

A planning application for the proposed development is to be submitted by Status Design.

2.0 SITE LOCATION AND DESCRIPTION

2.1 Site Location

The site is located at Station House, French Drove, Gedney Hill, Spalding, Lincolnshire, PE12 0NR. The National Grid Reference of the site is 53324/30914.

The location of the site is shown in Figure 1.

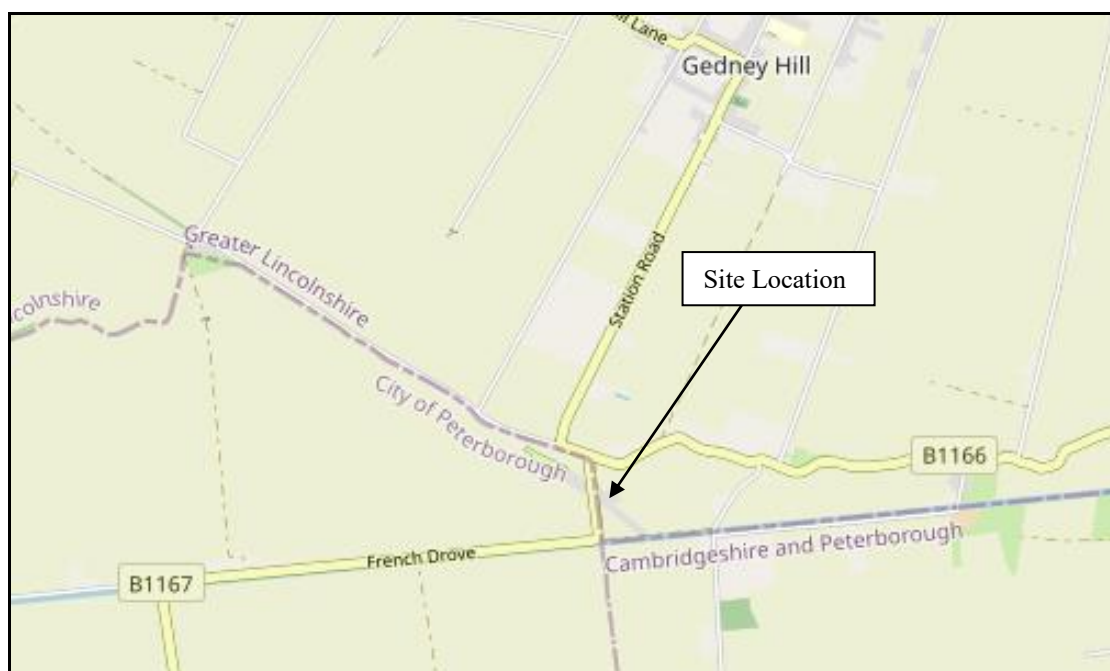


Figure 1 – Location Plan (© OpenStreetMap contributors)

2.2 Existing Site

The site is on the eastern side of French Drove. The site consists of a residential dwelling, the surrounding garden and an office and storage building that have a commercial use. The site is surrounded by agricultural land. The area of development is approximately 0.35 hectares.

Environment Agency LiDAR Data shows that ground levels around the storage building are typically +1.5m OD. The carriageway level of French Drove and the western part of the site around the dwelling are between +3.0m OD and +3.2m OD. The surrounding agricultural land is typically at +1.0m OD.

The site is in the North Level Internal Drainage Board's (IDB) district. Surface water at the site would naturally drain through soakaway and hence to the IDB drainage system. There is a riparian drain close to the northern boundary of the site and IDB Watercourse, Littleworth Drove Drain, 200m east of the site.

The online British Geological Survey maps indicate that the site is likely to be underlain by Oxford Clay Formation Mudstone. The bedrock is shown to be overlain with superficial deposits of clay and silt.

2.3 Proposed Development

The proposed development consists of the change of use of a storage building from domestic / commercial to 100% domestic storage. Details of the proposed development are provided in Attachment 1.

2.4 Local Development Documents

The South East Lincolnshire Local Plan 2011 – 2036, adopted in March 2019, is the Local Plan for the district. Policy 4: Approach to Flood Risk states the requirements for flood risk reduction.

The South East Lincolnshire Level 1 and Level 2 Strategic Flood Risk Assessment (SFRA) was prepared in June 2017.

The Joint Lincolnshire Flood Risk and Drainage Management Strategy has been prepared by Lincolnshire County Council as the Lead Local Flood Authority. The purpose of the Strategy is to increase the safety of people across Lincolnshire by reducing the number of people at risk of flooding, increasing the resilience of local communities, and reducing the impact of flooding.

2.5 Flood Zones

An extract from the Environment Agency Flood Maps for Planning is shown in Figure 2. The site is located within Flood Zone 3, an area with a high probability of flooding.

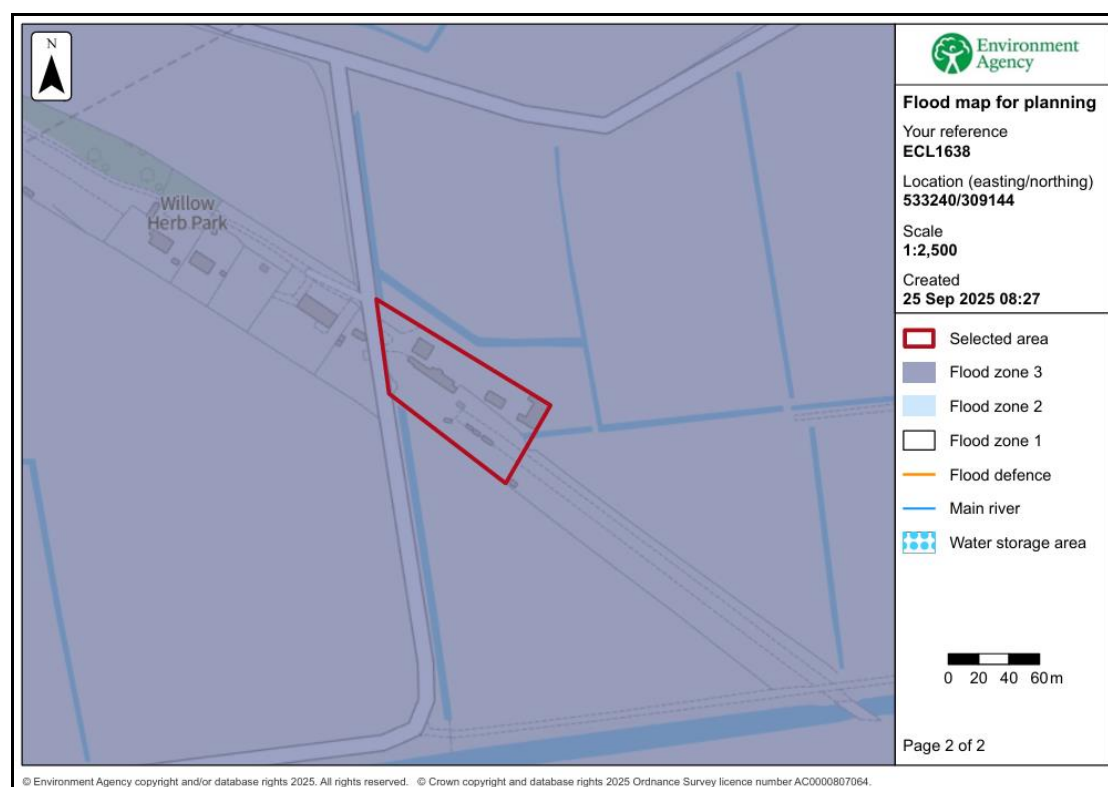


Figure 2 – Environment Agency Flood Map for Planning

The Environment Agency Long Term Flood Risk maps provide an indication of the risk from the primary sources of flooding. The details provided with these maps are summarised in Table 1. The depth of flooding identified is the maximum depth that occurs during a low chance (between 0.1% and 1% chance each year) event.

	Present Day		2050 Epoch	
	Chance of Flooding	Depth (Low chance)	Chance of Flooding	Depth (Low chance)
Rivers and the Sea	The site has a medium chance (between 1% and 3.3% chance each year)	No data available	No data available	No data available
Surface Water	There is an isolated area with a medium chance (between 1% and 3.3% chance each year)	Below 0.2m	There is an isolated area with a medium chance (between 1% and 3.3% chance each year)	Below 0.2m
Reservoir	Outside of the area at risk.			

Table 1 – Environment Agency Long Term Flood Risk Maps

Table 2 shows the level of risk at the site within the South East Lincolnshire SFRA.

SFRA Map	Present Day	2116
Residual Flood Hazard Map for the 1% fluvial and 0.5% tidal event	The site is outside the 'Low Hazard' area	The site is outside the 'Low Hazard' area
Residual Peak Depth Map for the 1% fluvial and 0.5% tidal	The site is outside the area at risk	The site is outside the area at risk

Table 2 – Flood Risk within SFRA Maps

3.0 FLOOD RISK VULNERABILITY

3.1 The Sequential and Exception Test

The NPPF requires the application of a Sequential Test to ensure that new development is in areas with the lowest probability of flooding.

The Exception Test is a method to demonstrate and help ensure that flood risk to people and property will be managed, while allowing necessary development to go ahead in situations where suitable sites at lower risk of flooding are not available.

3.2 Vulnerability Classification

Table 2 of the PPG Flood Risk and Coastal Change categorises different types of uses and development according to their vulnerability to flood risk. The proposed change of use is to a building that is classified as 'Less Vulnerable'.

Table 3 of the PPG Flood Risk and Coastal Change sets out Flood Risk Vulnerability and flood zone 'compatibility'. The site is within Flood Zone 3 and the development is 'Less Vulnerable' therefore it is not necessary to complete the Exception Test.

PPG Flood Risk and Coastal Change defines that the lifetime of the development in terms of flood risk and coastal change is 100 years.

3.3 Application of the Sequential Test

It is for the Local Planning Authority, using the evidence provided and taking advice from the Environment Agency as appropriate, to consider whether an application passes the Sequential Test.

Paragraph 033 of planning practice guidance (PPG) on Flood Risk and Coastal Change states that 'The Sequential Test does not need to be applied for applications for Change of Use (except for a change of use to a caravan, camping or chalet site, or to a mobile home or park home site)'.

Paragraph 048 of the PPG states that 'A Change of Use may involve an increase in flood risk if the vulnerability classification of the development is changed. In such cases, the applicant will need to show in their flood risk assessment that future users of the development will not be placed in danger from flood hazards throughout its lifetime.' The mitigation measures proposed in Section 5.2 of this flood risk assessment are such that risks to future users are mitigated.

4.0 SITE SPECIFIC FLOOD RISK

4.1 Local Flood Assets

The site is 7.8km north of the River Nene. The site is protected by the River Nene defences between Peterborough and Wisbech.

The site is 9.8km east of the River Welland. Crowland Washes provides floodplain storage for the River Welland. The land to the east of the River Welland is protected from the River Welland and Crowland Washes by the Corporation Bank.

The River Nene and River Welland are the responsibility of the Environment Agency. There is a long-term strategy for the maintenance of the Environment Agency defences which is reviewed and updated periodically.

The site is in the North Level Internal Drainage Board's (IDB) district with the nearest Board Drain, Littleworth Drove Drain, located 200m east of the site. The extensive local drainage network drains by gravity in an easterly direction to the North Level Main Drain. The North Level Main Drain discharges into the tidal River Nene at the Tydd Pumping Station.

During the operation and maintenance of its pumping stations, associated structures, and channel systems, the IDB seeks to maintain a general standard capable of providing flood protection to its district. A routine maintenance programme is in place to ensure that the Boards assets are commensurate with the standard of protection that is sought.

Current maintenance standards of the South Holland Internal Drainage Board and the Environment Agency are generally good.

4.2 Sources of Flooding

A summary of the sources of flooding is provided in Table 3.

Source of Flooding	Level of Risk
Drainage Network Flooding	The risk is assessed in Section 4.3.
Surface Water Flooding	Apart from an isolated area with a medium risk the risk is very low.
Fluvial Flooding	The risk is assessed in Section 4.3 and 4.5.
Tidal Flooding	The risk is assessed in Section 4.3 and 4.5.
Reservoir Flooding	The site is not at risk of reservoir flooding.
Groundwater Flooding	There is no evidence to suggest the site is at risk of groundwater flooding.

Table 3 – Sources of Flooding

4.3 Probability of Flooding

The probability of flooding associated with blockages within the IDB drainage system is low due to the maintenance standards already achieved and managed by the IDB. Failure of Tydd Pumping Station would lead to an increased level of risk in the IDB catchment.

Through the operation and maintenance of the pumping stations and the channel system the Board seek to maintain a general standard capable to providing flood protection to agricultural land and developed areas of 1 in 20 years and 1 in 100 years respectively. The risk associated with flood events that exceed the standard of protection provided is lowered due to the North Level IDB main drains incorporating freeboard. This freeboard provides storage during the exceedance events.

The site benefits from defences on the River Nene and River Welland that provide protection during a 0.5% annual probability (1 in 200 chance each year) tidal event and a 1% annual probability (1 in 100 chance each year) fluvial event.

4.4 Historic Flooding

During the preparation of this assessment, no evidence was discovered of the site being flooded.

4.5 Climate Change

Climate change is likely to impact the site through increased rainfall intensity and duration affecting the local drainage network and increased flood levels in the River Nene.

The River Nene and River Welland defences have been designed to include an allowance for climate change.

In summary the existing systems and defences are appropriate for the design life of the development (i.e., 100 years).

4.6 Residual Risk

There is a residual risk of flooding in the South Holland IBD area should a breach of the tidal defences occur. The South East Lincolnshire SFRA includes maps demonstrating the residual peak depth in 2116. When climate change allowances are applied to the 1% annual probability (1 in 100 chance each year) fluvial event and 0.5% annual probability (1 in 200 chance each year) tidal event the site is not at risk during a breach.

5.0 FLOOD RISK MITIGATION

5.1 Summary of Risks

The probability of this development flooding from localised drainage systems is low. Failure of Tydd Pumping Station could increase the level of risk within the IDB catchment.

The probability of the site flooding from any Environment Agency system is less than 1% annual probability (1 in 100 chance each year) because of the standards of the existing flood defences. Over time there will be a gradual increase in risk to the site due to climate change. During the design life of the development, it is not anticipated that the site would flood.

The SFRA considers the residual risk associated with overtopping and a breach in the defences in 2115. The maps show that the site is not at risk.

There will be no increase in impermeable area associated with the development so there is no potential that flood risk will be increased elsewhere.

5.2 Mitigation Measures

The site has a low 'actual risk' of flooding. Considering the development is the change of use of a storage building there are no specific mitigation measures proposed associated with the design.

The developer should ensure that the users of the building are sufficiently aware of the risk of flooding, and the standard of the existing defences. The Environment Agency operates a flood warning system for properties at risk of flooding to enable householders to protect life or take actions to manage the effect of flooding on property. Floodline Warnings Service is a national system run by the Environment Agency for broadcasting flooding warnings. The users of the building should register to receive flood warnings.

Failure of Tydd Pumping Station may occur due to mechanical breakdown or power supply being disrupted. However, in these circumstances, if conditions were such to put properties and land at risk of flooding, the IDB would take emergency action to maintain the drainage level of service by using temporary pumping equipment.

It is recommended that surface water run-off is managed so that stormwater from the site will not affect any adjoining properties or increase the flood risk elsewhere.

6.0 CONCLUSIONS

As a result of the assessment, the following conclusions have been reached.

- The proposed development consists of the change of use of a storage building from domestic / commercial to 100% domestic storage at Station House, French Drove, Gedney Hill.
- The site is located within an Internal Drainage Board catchment and through the operation and maintenance of the pumping stations and the channel system the Board seek to maintain a general standard capable to providing flood protection to agricultural land and developed areas of 1 in 20 and 1 in 100 years respectively.
- The proposed development is in Flood Zone 3. The site benefits from defences on the River Nene and River Welland that provide protection during the 0.5% annual probability (1 in 200 chance each year) tidal event including an allowance for climate change. The site is not at risk during a breach of the tidal defences.
- There are no specific recommendations associated with the storage building to reduce the risk of flooding to the development.
- The development passes the Sequential Test and is therefore suitable for the proposed location.

ATTACHMENT 1

SITE PLAN (DWG SD25/023/1)

NOTE
FOR EXISTING STORAGE BUILDING REFER
TO ORIGINAL DRAWING SD17-048/2

BUILDING FOR CHANGE
OF USE

EXISTING
STORAGE
BUILDING

EXISTING
GARAGE

EXISTING
OFFICES

EXISTING
HOUSE

EX.
ACCESS

EX.
ACCESS

Status
DESIGN
CONSULTANTS IN ARCHITECTURE & PLANNING

PROPOSED CONVERSION OF
EXISTING STORAGE
BUILDING FROM 25%
COMMERCIAL 75% DOMESTIC
TO 100% DOMESTIC AT
STATION HOUSE, FRENCH
DROVE, GEDNEY HILL FOR

MR. T. NEW.

SITE PLAN

1:200 | SD25/023/1

AUG-25 | B.GILHAM.

Westfield Lodge, Low Lane, Huddersfield, Lines, PE12 7PW
Tel: 01466 423433
Email: info@status-design.co.uk

SD25-023/1