


DOMESTIC VEHICLE CROSSING (REF. CLAUSE 1.9(A))

DOMESTIC VEHICLE CROSSING
(Flexible Construction)

1 Excavate for as necessary and compact the formation prior to laying any foundation material. Provide, lay and compact using vibrating compaction equipment 380mm finished thickness of non-frost susceptible crushed rock, crushed slag or crushed concrete to Type 1 grading. If CBR values are below 2% an approved Geotextile or an extra 150mm of sub-base will be required.

2 Provide, lay and compact 50mm finished thickness of 20mm nominal size dense bitumen macadam basecourse to BS: 4987 using 100 pen bitumen binder. Void content 2.8%.

3 Provide, lay and compact 25mm finished thickness of 6mm nominal size bitumen macadam wearing course to BS: 4987 using 100 pen bitumen binder. Void content 2.10%.

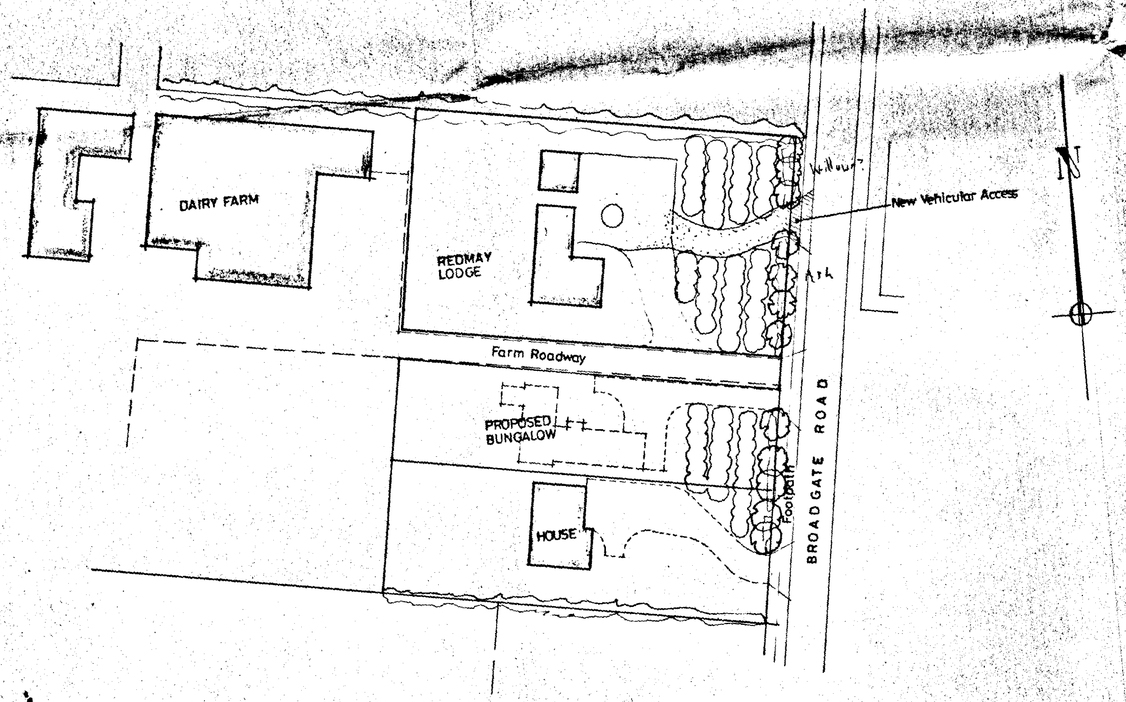

SITE PLAN



LOCATION PLAN
1 : 2500

SOUTH HOLLAND DC
HOUSING & PLANNING
5 OCT 1998
Ref: H180/98

G. R. MERCHANT
I.ENG AMICE, FIWO,
ARCHITECTURAL, STRUCTURAL
& LAND DRAINAGE CONSULTAN
TEL: HOLBEACH (01406) 490800

PROJECT:
VEHICULAR ACCESS
REDMAY LODGE
BROADGATE ROAD
SUTTON ST EDMUND

CLIENT:
S.H. & M. MORRIS

SCALES: *AS INDICATED*
DATE: *SEPT*
G.R.MERCHANT
DRAWING N
SH&

DETERMINED