
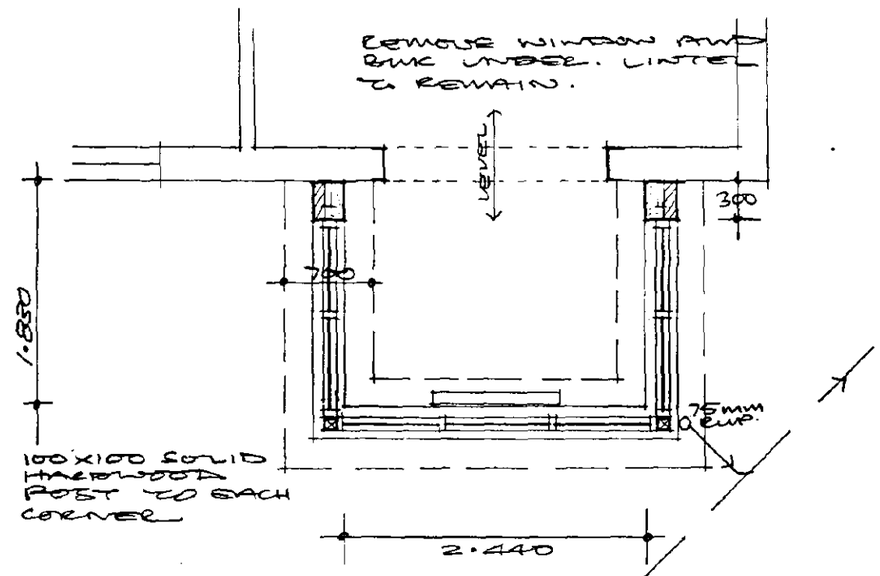


PLAN.

ELECT. MAIN STORE HEATER TO BE REPOSITIONED AS SHOWN.

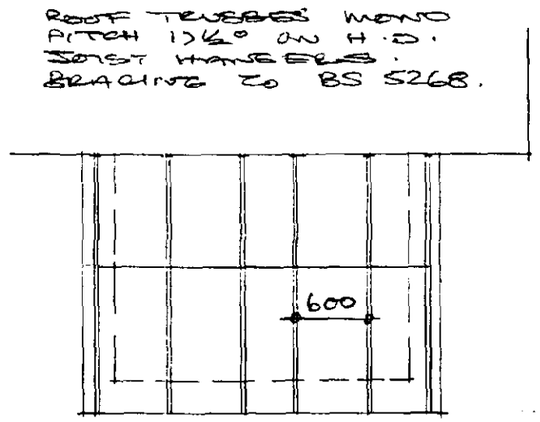


ROOF PLAN.

MARLEY RED ROLL RIDGE TILES TO MATCH EXISTING ON 25 x 50 T.T. BATTENS ON UTEARTHANE ROOFING FELT LAPPED 150 MM ALL WAYS ON TWINAPLATE ROOF TRUSSES.
150 MM FIBREGLASS WITH 50MM AIR GAP TO EAVES. 12 MM FOIL BACKED P/BOARD + ARTEX. 200 x 100 SOLID H.W. EAVES BEAMS.
NEW VENTED SOFFITS. 100 HR GUTTERS + 75 MM RWPS TO MATCH EXISTING.
H.W. WINDOW FRAMES STAINED TO MATCH EXIST. DOUBLE GLAZED. SUN RETENTION TOUGHENED GLASS. 4000 SQ MM TRICKLE VENTS.


FACINGS TO MATCH EXISTING, 50MM CAVITY FILLED 50MM BRUTHERM 100 MM CELCON. 10 NO TIES PER SQ.M. REFER D.A.C. CLASS A BLOCKS BELOW G.L. CAVITY FILLED WEAK MIX BELOW G.L.
700 x 250 CONT STRIP FOOTINGS TO LOADBEARING STRATA.

100 MM HEPSEWARE RW GOODS CONN TO EXISTING SYSTEM.

TIMBER SHINGLES TO MONO GABLES FIXED TO GROUNDS ON 19 MM MARINE PLY ON TRUSS.
NOTE 200 SQ MM VENT TO EACH SIDE.
CODE 5 LEAD FLASHINGS.

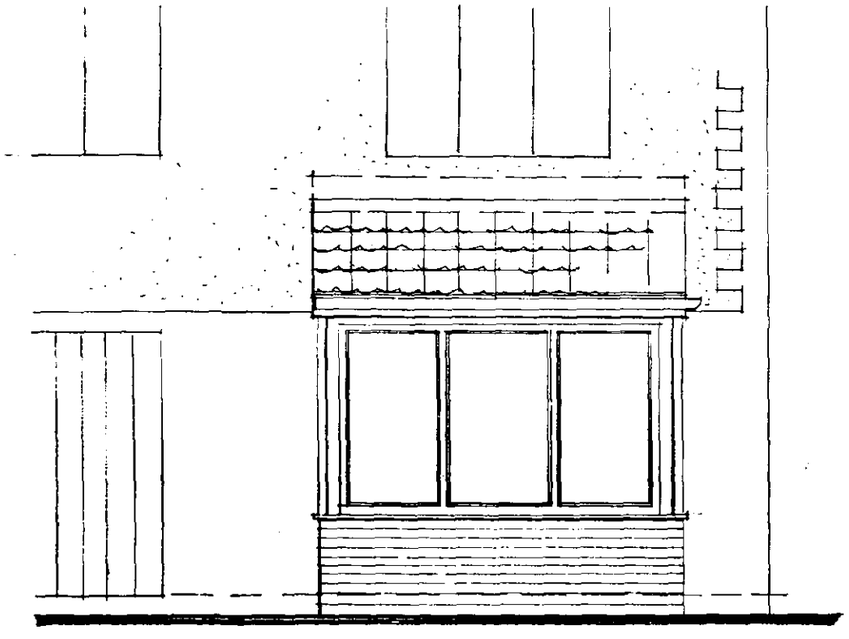


FRONT.

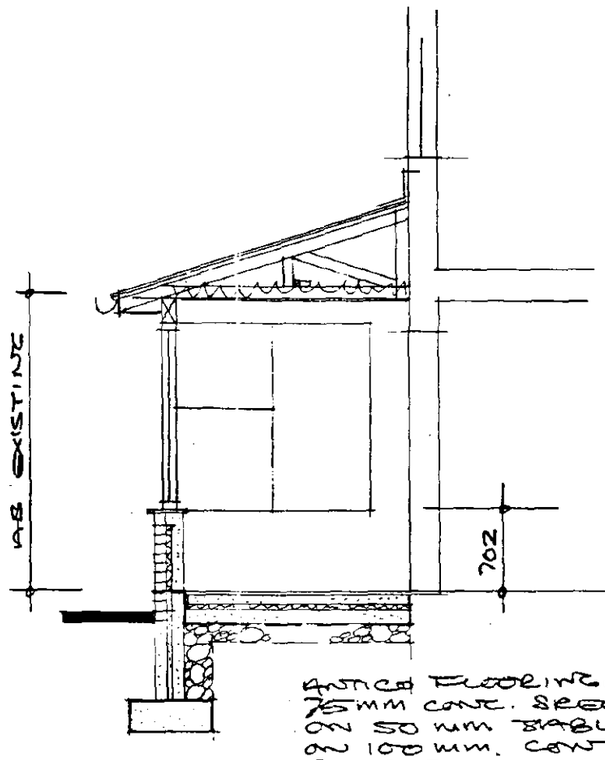

SECTION.

ANTICA FLOORING ON 25MM CONT. SCREED ON 50 MM SLABLITE ON 100 MM. CONC SLAB STA MIX ON USQUEEN 1200G. WRAPPED 150 MM ALL WALLS AND ONTO WALL DPC. 150 MM CONC. HARDCORE.

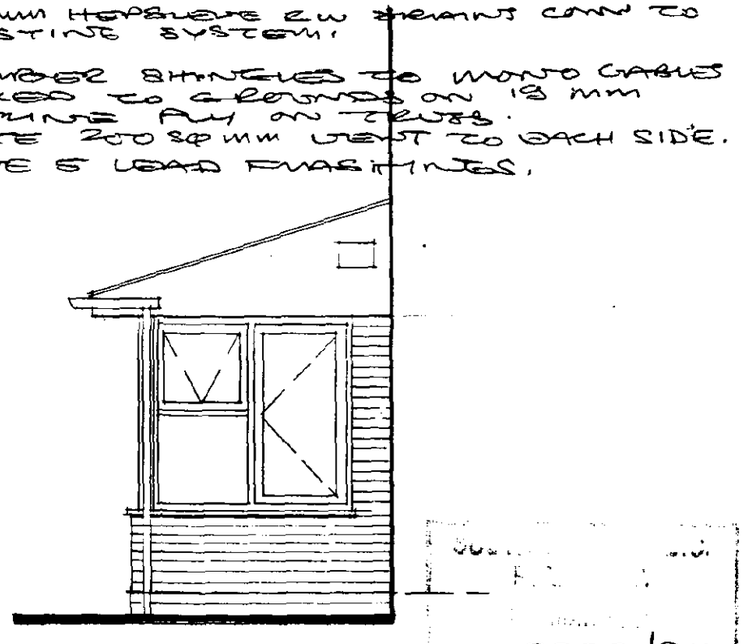


SIDE. (BOTH ~~THIS~~ SIMILAR)

0222/95


DETERMINED
PLAN

PROPOSED BAY WINDOW - MR + MRS D.I. GOSNEY.

LCD 0406 422126 . . . . .

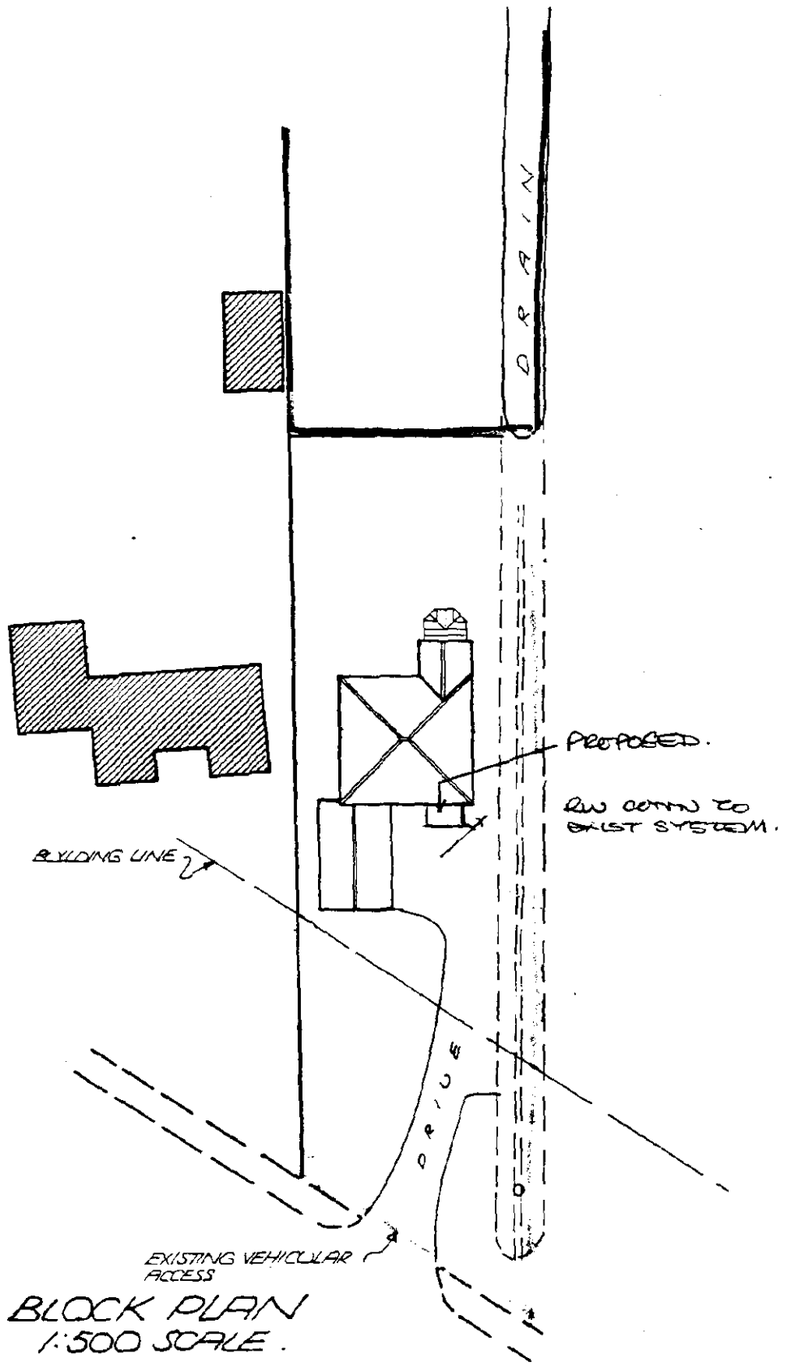

BLOCK PLAN
1:500 SCALE.

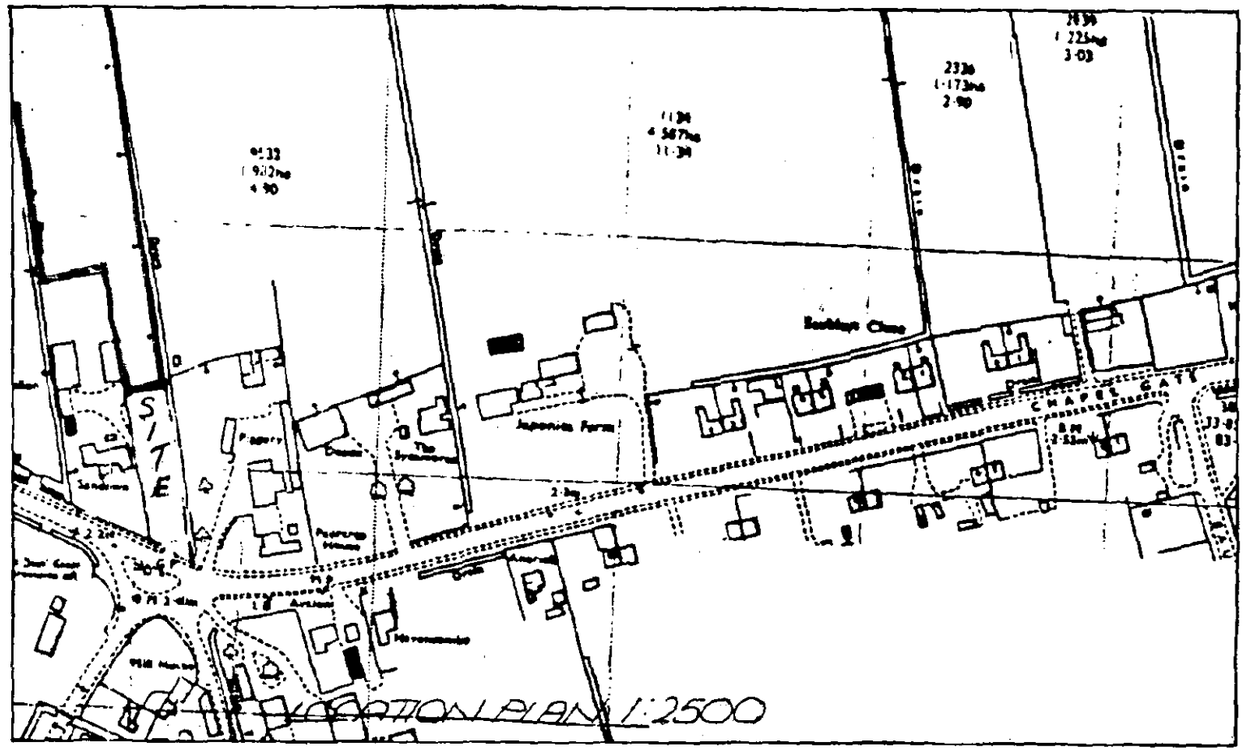

CROWN COPYRIGHT RESERVED.

PROPOSED BAY WINDOW TO EXISTING DWELLING ~ MR + MRS D. I. GOSNEY.
CHAPELGATE. SUTTON ST. JAMES.
SPALDING. LINCS.

DETERMINED PLAN

01 MAR 1995
0222/95.

SCALES AS SHOWN. LCD. 0406 422126. 9521/2