
LEVEL SCHEDULE

DPC	10.150m
MH1 COVER	10.000m
MH1 INVERT	9.500m
MH2 COVER	10.000m
MH2 INVERT	9.420m
MH3 COVER	10.000m
MH3 INVERT	9.300m

DOOR SCHEDULE

LOCATION	CLEAR OPENING WIDTH
FRONT ENTRANCE	775mm
BEDROOM 2	750mm
BEDROOM 1	750mm
ENSUITE	750mm
BATHROOM	800mm
KITCHEN	800mm
LOUNGE	800mm
BEDROOM 3	750mm

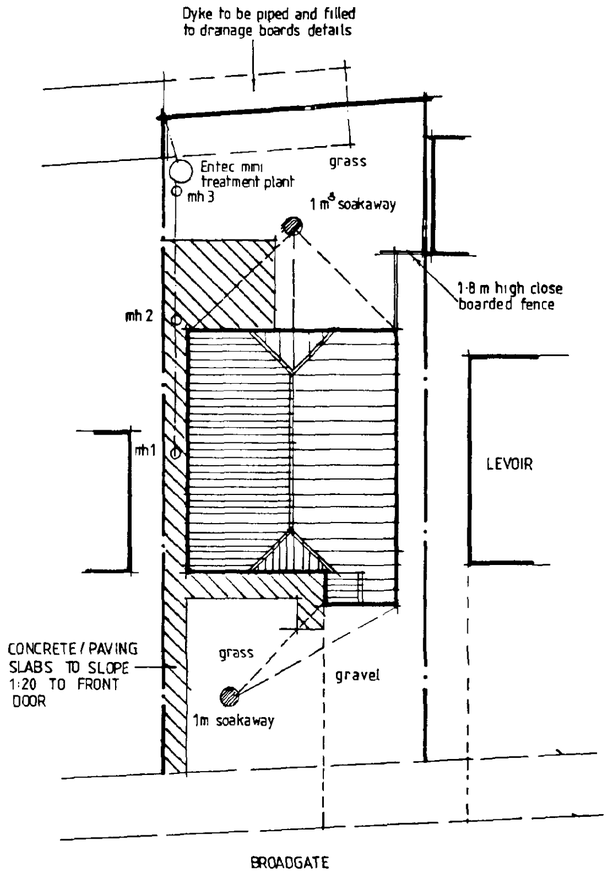


SITE PLAN 1:200

DRAINAGE
Inspection chambers to be Hepworth or similar approved polypropylene with 100mm dia. Inlets, 450 dia. Int. upto 1m deep, 1050mm dia. . Up to 1.5m deep. Cast iron cover & frame. 100mm dia. Upvc foul & surface water drains bedded & surrounded in 150mm pea gravel.
Drains protected against differential movement where passing through walls to be wrapped in 25mm fibreglass & have lintels over. Drains protected where passing under floors if within 300mm of underside of floor slab, by surrounding in 25mm fibreglass & 150mm concrete.
Drains passing under road/drives to be protected if within 900mm of surface, by reinforced concrete bridging slab bearing on firm ground/I.C. in road/drives protected by surrounding in 150mm concrete. Cover & frame to have a wheel load of 15 tonnes.
No connection to be made to s&vp within 450mm of invert.S&vp to terminate 900mm above nearest window opening balloon guard.
No bends to occur in wet section of s&vp. Boxed in S&VP to terminate with ventilator tile.
Shower set on 150mm high plinth. Front panel to shower to be screwed to allow access to clean waste.
All hand basins, baths & showers to have resealing traps Bath & sink 38 dia waste, shower 40 dia. Waste, hand basin 32 dia. waste, w.c. 100 dia. waste. Where runs over 1.7m waste pipes to be 40 dia. 75mm deep seal traps. Back inlet gullies to take waste pipes where s&vp not convenient

RAINWATER DRAINAGE
Surface water taken to soakaway min 4.5m from buildings.
Gutters 112mm dia. laid to fall 1:600, downpipes 68mm dia.
Where R.W.P. disperses on to roof, shoe to be fitted to bottom. Weather tile provided under shoe.

ALL DRAINS BE 100mm DIA. UPVC.
FALLS TO BE:- 1:40 BETWEEN SVP and I.C.
1:70 BETWEEN I.C. and I.C.
1:70 BETWEEN RWP and SOAKAWAY

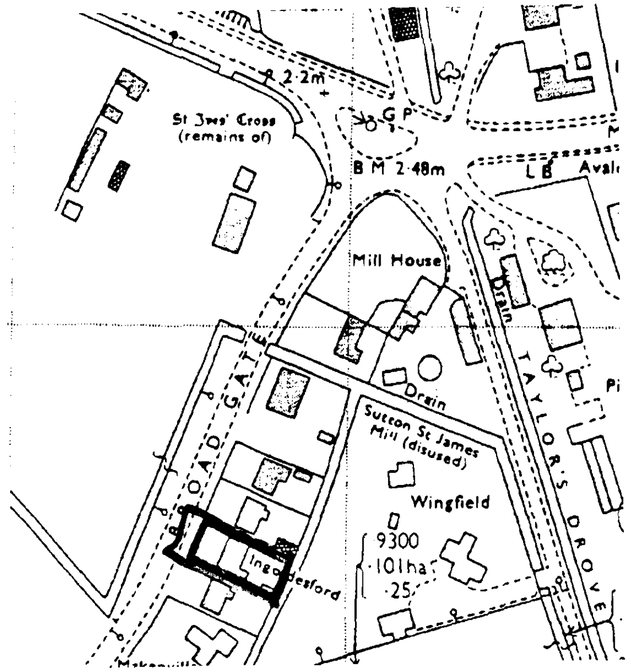

LOCATION PLAN 1:2500

DETERMINED PLAN

Peter Humphrey Associates
ARCHITECTURAL DESIGN AND BUILDING

PROJECT
Proposed Bungalow
Adj. Levoir
Broadgate
Sutton St James


CLIENT
Argyl Developments Ltd

DATE	SCALE	JOB No.
May 2001		2218/2


DATE REVISED	DETAILS

DO NOT SCALE FROM THIS DRAWING
COPYRIGHT: THIS DRAWING MUST NOT BE ISSUED, LOANED OR COPIED WITHOUT THE CONSENT OF PETER HUMPHREY ASSOCIATES


Architectural
Peter Humphrey Associates
ARCHITECTURAL DESIGN AND BUILDING
TELEPHONE 01945 466 966
39 OLD MARKET · WISBECH · CAMBS · PE13 1NB
E-MAIL: ENQUIRIES@PHARCHITECTURAL.CO.UK
British Institute of Architectural Technologists

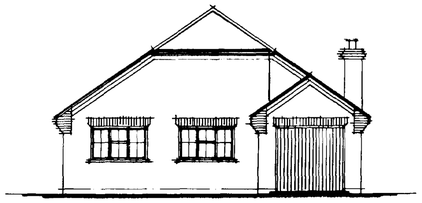


FRONT ELEVATION

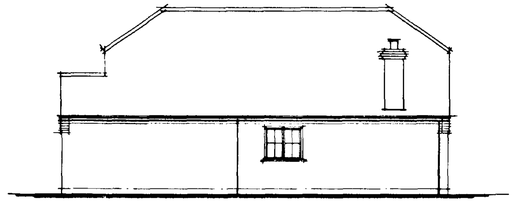

SIDE ELEVATION

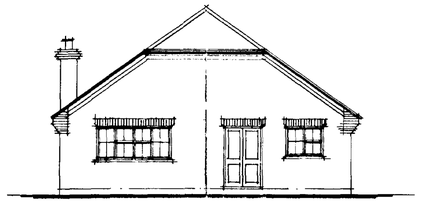


REAR ELEVATION

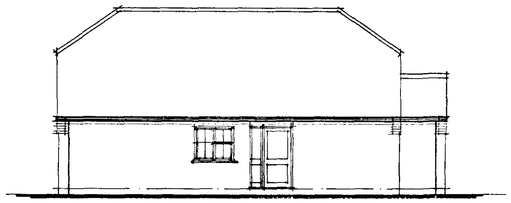

SIDE ELEVATION


Diagram 24 Clear space for frontal access to WC




EXTERNAL WALLS
Cavity wall 253mm overall consisting of good quality facing bricks 50mm min. cavity with Dritherm cavity insulation 50mm thick,100mm Thermalite insulating blocks 3.5N. 13mm plaster to internal faces of walls. All cavities to be sealed at highest point .Close reveals with damcore insulated vertical DPC in accordance with manufactures specification. DPC's to all walls external & internal, min 150mm above Finished Ground Level. DPC to be linked/lapped with DPM.
Galvanized butterfly wall ties 6 no. per square metre (450 ctrs vertically & 900 ctrs horizontally to B.S.1243 (1978) amended) & 300 mm max. ctrs at reveals.


WINDOWS
All windows to be double glazed and fitted with trickle vents providing the following background ventilation:-
Habitable rooms 8,000mm^2
Kitchen, W.C., Utility and Baths. 4,000mm 2
All glass lower than 1.5m above floor level, to doors adj. Sidelights and windows, and lower than 800mm above floor level should be break safety glass or laminated or toughened glass to B.S. 6206:1981.
Double glazing to have min 12mm air gap between glass.

LINTELS
Lintels to be I.G. Catnic or similar approved lintels installed in accordance with manufacturer's instructions.
I.G. lintels to have cavity tray over. .
Min. 2m headroom under all arches.
Lintels exposed protected with 1:6 cement/sand render with expamet for key.

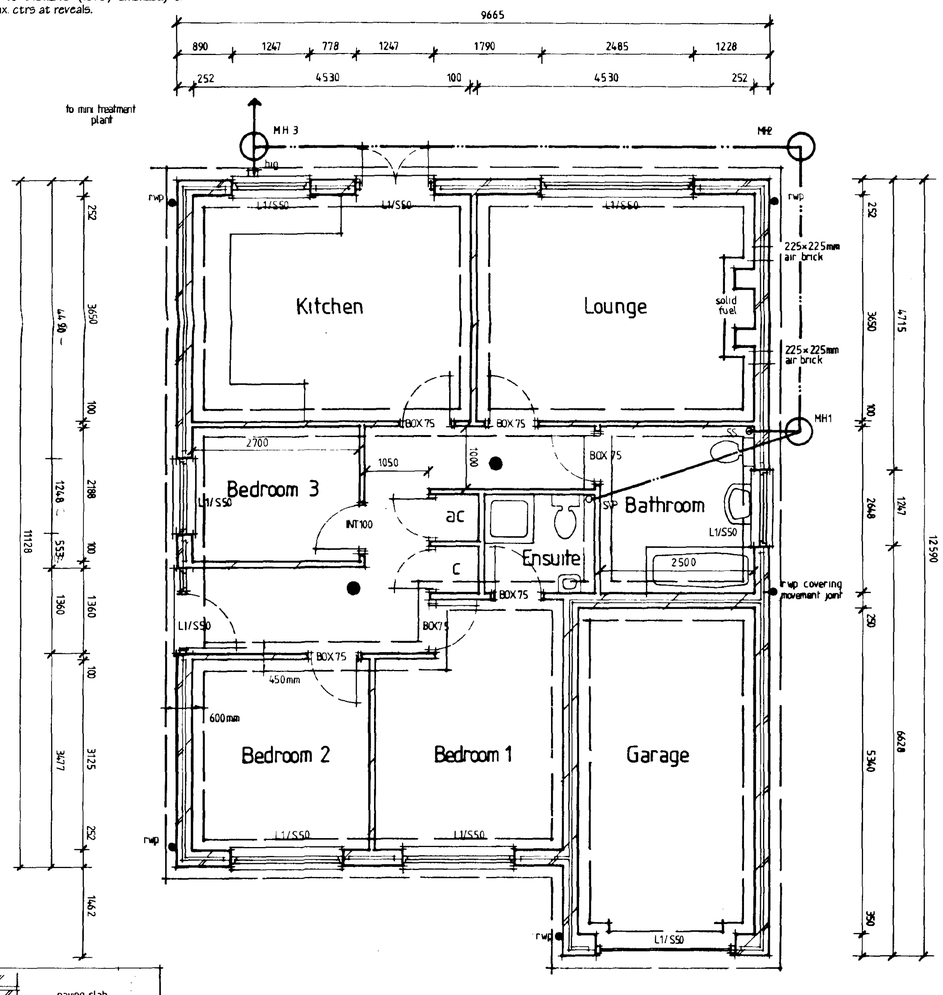

FLOOR PLAN







HEATING
Boiler to be oiled fired with balanced flue, durable wire guard over at ground floor level. All hot water pipes to be within insulated space unless adequately insulated.
Hot water storage vessel to be vented atmosphere & be well insulated.
Heating system to have zone controls, timing controls and boiler interlocks.
Zone controls required for hot water central heating systems, fan controlled electric storage heaters and electric panel heaters to control the temperatures independently in those areas that require different temperatures. The control devices could be room thermostats and /or thermostatic radiator valves at any other suitable temperature sensing devices. Timing devices should be provided to control the periods when heating systems operate. This provision should be made for gas fired and oil fired systems and for systems with solid fuel fired boilers where forced draught fans operate when heat is required.
Boiler control interlocks
Gas and oil fired hot water central heating systems controls should switch the boiler off when no heat is required whether control is by room thermostats or by thermostatic radiator valves.
Systems controlled by thermostats should fire only when a space heating or cylinder thermostats is calling for heat.
Systems controlled by thermostatic radiator valves should be fitted with flow control or other devices to prevent unnecessary boiler cycling.
Insulation of hot water storage vessel to be a 35mm thick factory applied coating of P.U. foam having zero ozone depletion potential and a minimum density 30 Kg/m.
Hot water pipes connected to a hot water storage vessel including primary flow and returns to be insulated for at least one metre from their points of connection. Insulation thickness minimum 15mm. hot water cylinder to be foam lagged type.

SUSPENDED FLOORS
Proprietary beam & block to manufacturers specifications, 38mm Jablite insulation, on DPM laid on floor with 65mm screed to be reinforced with chicken wire.Ventilation to floor void maintained with 225 x 75mm air bricks and PVC stepped sleeves at 1.2 m ctrs & to internal walls 225 x 225mm PVC air bricks. (If terra-cotta air bricks are used ctrs to be 450mm).
Incorporate 2 layers brush applied damp proof membrane, this must be bitumen based product & thoroughly dried prior to the installation of polystyrene insulation.


ROOF CONSTRUCTION
Roof truss manufacturers to provide design details & calculations of truss to L.A. prior to commencement of work on site. Truss rafters at 600mm max. ctrs., bracing & tank stand to TPA recommendations in accordance with B.S.5268 Part 2&3 1985.
100 x 75 wall plate, strapped to wall with 30 x 5 mm m.s. straps 1500 long once bent over at 2m ctrs. Fixed back to wall. Trusses fixed to wall plate by galvanized truss clip or tosh nailed.
30x 5mm m.s. straps 1500 long at 2m ctrs laid over 3 no. ceiling joists & up rake of rafters at gables, all with solid packing.
Concrete interlocking tiles at 35° Pitch on 38x25mm
battens on untearable felt to B.S.747.
Roof insulation to be 2 No. layers of 100mm fibreglass insulation running opposite ways.
Cross ventilation maintained with Redland Redvent Eaves Ventilators, giving min 10mm air gap & preventing insect penetration. Installed in accordance with manufacturer's instructions.
Valleys constructed via GRP valley troughs.
Compound truss to manufacturer's specification.
Roof hatch to be provided to gain access to roof void and water tanks. Moisture resisting chipboard to be used to form a walkway from hatch to tanks
Roof hatches to be insulated & draught sealed & lockable.
Code 4 lead flashing min. 150mm. upstand with cavity tray over at all abutments.

FIREPLACE
Chimney & fireplace to be constructed of non-combustible material. The hearth should be min 125mm thick of non-combustible material, projecting min. 500mm from chimney breast and 150mm from fire recess. 2 no. Fireguard clips fixed one each side of chimney breast.
Flues should be min 225 dia. clay flue liners with rebated sockets uppermost to prevent condensation as described in B.S. 1181:1971 (1977) Clay flue linings & flue terminals. Chimney to have 2 no. courses of engineering brick DPC above intersection of roof.
Code 4 lead flashing to roof & chimney stack. Chimney to terminate 600mm above ridge or 1m above highest point of intersection with roof, if more than 6.0mm from ridge.
No combustible material to be within 40mm of face of chimney masonry






1:10 SILL AND LINTEL





1:10 REVEALS



ACCESSIBLE THRESHOLD

Diagram 22 Heights of switches, sockets, etc.





MOVEMENT JOINT

SMOKE DETECTORS
Smoke detectors to be interconnected and run off mains with separate circuit at distribution board, to a min standard of BS.5839:Part 1: Standard L3..

CEILINGS
12.5mm plasterboard ceiling to underside of joists.
Shiplap boarding to all external ceilings.
Artex or plaster skin finish.


GARAGE CEILING
2 No. layers 12.5 mm plasterboard with staggered joints. Joints and edges tobe taped.
Min 50mm fibreglass insulation to garage ceiling.

EXTRACTOR FANS
Kitchen to have extract rate of 30 Litres/second adjacent to a hob or 60 Litres/second elsewhere.
Bathrooms to have extract rate of 15 Litres/second all ducted to external air.


DRAFT PROOFING
The following methods satisfy the requirements:-
Fitting draught-stripping in the frames of openable elements on windows, doors and roof lights.
Sealing around floor and ceiling hatches.
Ensuring boxing for concealed services is sealed at floor and ceiling levels and sealing piped. Services where they penetrate or project into hollow constructions or voids.

EXTERNAL WORK
Paths to be 75mm thick concrete on 100mm hard-core..
Movement joints at 4m. ctrs.

CONDITIONAL APPROVAL
The contractors should check the building regulations approval notice for conditions. The appropriate manufacturer's details must be obtained & submitted to the building consrol office

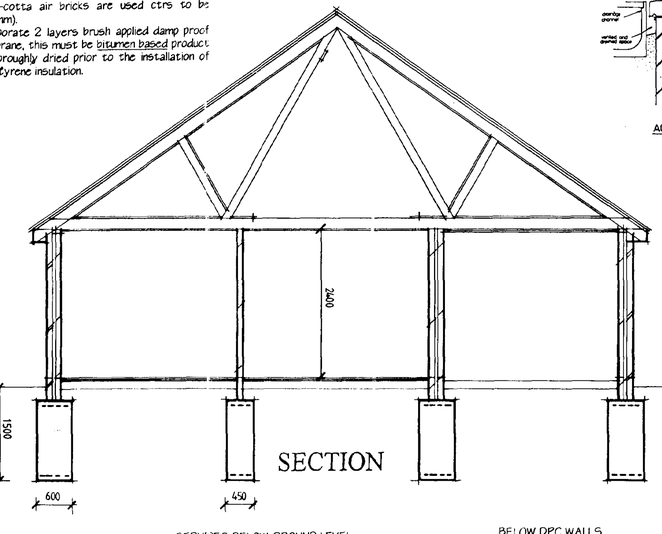

SECTION

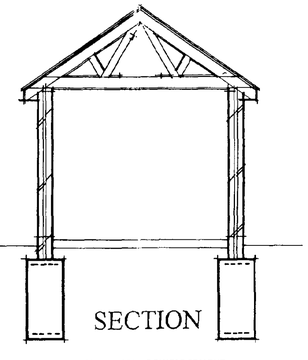

SECTION

FOUNDATIONS
FOUNDATION DESIGN AS STRUCTURAL ENGINEER'S DETAILS.

SERVICES BELOW GROUND LEVEL
Where drains pass through walls/footings below ground level to be protected with Osma protection sleeve or similar to prevent entry of vermin.

BELOW DPC WALLS
Incorporate 7N/mm^2 block below Ground level.
Lean mix concrete fill to cavity below Ground level.

A252 MESH REINFORCEMENT TOP AND BOTTOM 75mm ALL ROUND COVER

CONCRETE MIX TO BE RC35

Ref. A11

Peter Humphrey Associates
ARCHITECTURAL DESIGN AND BUILDING

PROJECT
Proposed Bungalow
Adj. Levair
Broadgate
Sutton St James

SOUTH HOLLAND DC HOUSING & PLANNING 16 JUL 2001 Ref: 548/01

CLIENT
Argyl Developments Ltd.

DATE	SCALE	JOB No.
May 2001	1:50 1:100	2218 / 1A

DATE REVISED	DETAILS
A 11 · 7 · 01	Amended

DETERMINED PLAN

DO NOT SCALE FROM THIS DRAWING
COPYRIGHT: THIS DRAWING MUST NOT BE ISSUED, LOANED OR COPIED WITHOUT THE CONSENT OF PETER HUMPHREY ASSOCIATES

Peter Humphrey Associates
ARCHITECTURAL DESIGN AND BUILDING
TELEPHONE 01945 466 966
30 OLD MARKET WISBECH CAMBS PE13 1NB
E-MAIL: ENQUIRIES@PHARCHITECTURAL.CO.UK
British Institute of Architectural Technology