FLOOD RISK ASSESSMENT
FOR RESIDENTIAL DEVELOPMENT AT
STATION ROAD, TYDD GOTE

FINAL REPORT

ECL0305-1/PETER HUMPHREY ASSOCIATES LTD

DATE AUGUST 2020

ELLINGHAM CONSULTING LTD
Email: tim@ellinghamconsulting.co.uk

DISCLAIMER
This document has been prepared solely as a Flood Risk Assessment in support of a planning application for proposed residential development at Station Road, Tydd Gote. "Ellingham Consulting Ltd" accepts no responsibility or liability whatsoever for any use made of this document other than by the client "Ashmore Developments Ltd" for the purposes it was originally commissioned and prepared. All comments and opinions made are based upon information available to "Ellingham Consulting Ltd" during the necessary investigative process, and the conclusions and recommendations, could therefore, differ in the event of material subsequently being found erroneous, incomplete or misleading. "Ellingham Consulting Ltd" therefore, accepts no liability should this prove to be the case.

CONTENTS

1.0 INTRODUCTION

2.0 SITE LOCATION AND DESCRIPTION
- 2.1 Site Location
- 2.2 Existing Site
- 2.3 Proposed Development
- 2.4 Local Development Documents
- 2.5 Available Flood Risk Information

3.0 FLOOD RISK VULNERABILITY
- 3.1 The Sequential and Exception Test
- 3.2 Vulnerability Classification
- 3.3 Application of the Sequential and Exception Test

4.0 SITE SPECIFIC FLOOD RISK
- 4.1 Local Flood Assets
- 4.2 Sources of Flooding
- 4.3 Probability of Flooding
- 4.4 Historic Flooding
- 4.5 Climate Change
- 4.6 Residual Risks

5.0 FLOOD RISK MITIGATION
- 5.1 Summary of Risks
- 5.2 Mitigation Measures

6.0 CONCLUSIONS AND RECOMMENDATIONS

ATTACHMENT 1 – Planning Drawing 1 (Dwg 6176/01D)

1.0 INTRODUCTION

This Flood Risk Assessment has been prepared in accordance with National Planning Policy Framework (NPPF) and supporting planning practice guidance (PPG) on Flood Risk and Coastal Change.

In areas at risk of flooding or for sites of 1 hectare or more, developers are required to undertake a site-specific Flood Risk Assessment to accompany an application for planning permission. This Flood Risk Assessment has been produced on behalf of Ashmore Developments Ltd in respect of a development that consists of one dwelling at Station Road, Tydd Gote.

A planning application for the proposed development is to be submitted by Peter Humphrey Associates Ltd.

2.0 SITE LOCATION AND DESCRIPTION

2.1 Site Location

The site is located on land adjacent to 41 Station Road, Tydd Gote, Wisbech, PE13 5QA. The National Grid Reference of the site is 54542/31797.

The location of the site is shown in Figure 1.

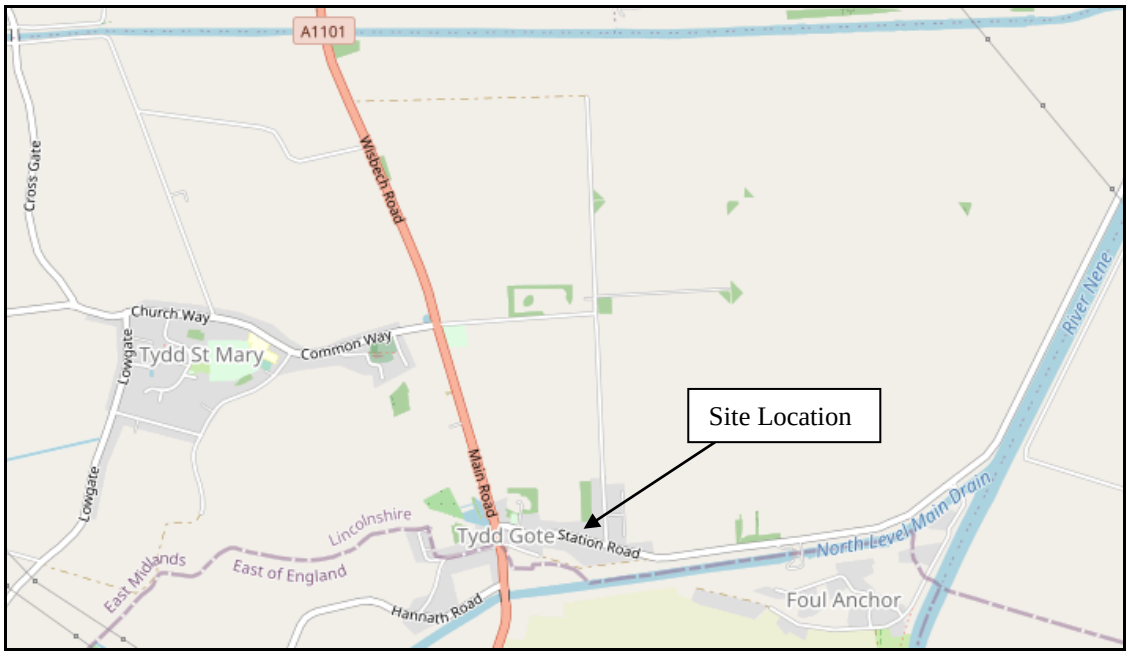


Figure 1 – Location Plan (© OpenStreetMap contributors)

2.2 Existing Site

The site is on the northern side of Station Road. The site is part of the garden of 41 Station Road. The area of development is approximately 0.12 hectares.

Environment Agency LIDAR information shows that ground levels within the site are typically between +3.6m OD and +3.7m OD. The carriageway level of Station Road adjacent to the site is +4.4m OD.

The site is in the South Holland Internal Drainage Board (IDB) District. Surface water at the site would naturally drain through soakaway and hence to the IDB drainage system.

The online British Geological Survey maps indicate that the site is likely to be underlain by Ampthill Clay Formation mudstone. The bedrock is shown to be overlain with superficial deposits of clay and silt.

2.3 Proposed Development

The proposed development consists of one new dwelling. The dwelling will have two storeys. The Site Plan is provided in Attachment 1.

2.4 Local Development Documents

The South East Lincolnshire Local Plan 2011 – 2036, adopted in March 2019, is the Local Plan for the district. Policy 4: Approach to Flood Risk states the requirements for flood risk reduction.

The South East Lincolnshire Level 1 and Level 2 Strategic Flood Risk Assessment (SFRA) was prepared in June 2017.

The Joint Lincolnshire Flood Risk and Drainage Management Strategy has been prepared by Lincolnshire County Council as the Lead Local Flood Authority. The purpose of the Strategy is to increase the safety of people across Lincolnshire by reducing the number of people at risk of flooding, increasing the resilience of local communities, and reducing the impact of flooding

2.5 Flood Zones

The site is located within Flood Zone 2, an area with a medium probability of flooding, of the Environment Agency Flood Maps for Planning as shown in Figure 2.

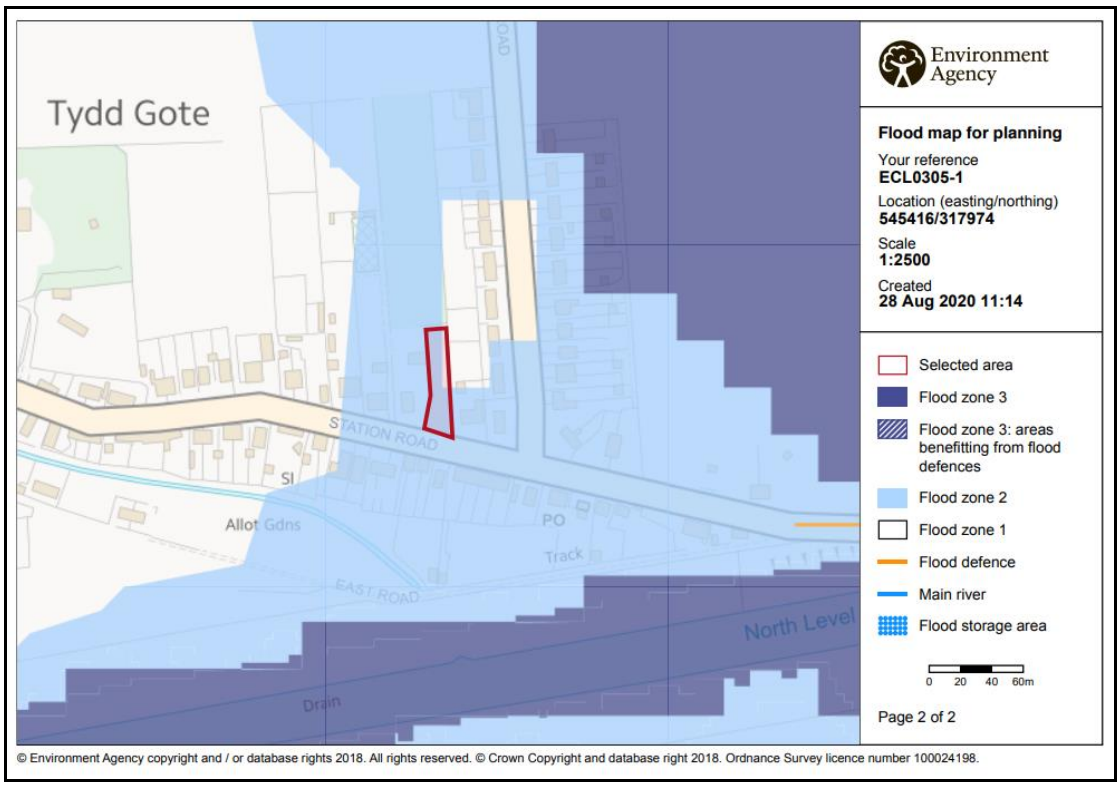


Figure 2 – Environment Agency Flood Map for Planning

The Environment Agency Long Term Flood Risk maps show that:

- the site has a low risk of flooding from rivers or the sea (annual probability between 0.1% and 1%);
- the site has a very low risk of surface water flooding (annual probability less than 0.1%); and
- the site is not within an area at risk of reservoir flooding.

Table 1 shows the level of risk at the site within the South East Lincolnshire SFRA.

SFRA Map	Present Day	2116
Residual Flood Hazard Map for the 1% fluvial and 0.5% tidal event	The site is outside of the 'Low Hazard' area	The site is outside of the 'Low Hazard' area
Residual Peak Depth Map for the 1% fluvial and 0.5% tidal	The site is outside of the area at risk of flooding	The site is outside of the area at risk of flooding

Table 1 – Flood Risk within SFRA Maps

3.0 FLOOD RISK VULNERABILITY

3.1 The Sequential and Exception Test

The NPPF requires the application of a Sequential Test to ensure that new development is in areas with the lowest probability of flooding.

The Exception Test is a method to demonstrate and help ensure that flood risk to people and property will be managed, while allowing necessary development to go ahead in situations where suitable sites at lower risk of flooding are not available.

3.2 Vulnerability Classification

Table 2 of the PPG Flood Risk and Coastal Change categorises different types of uses and development according to their vulnerability to flood risk. The proposed development is covered by the description of buildings used for dwellings and is classified as 'More Vulnerable'.

Table 3 of the PPG Flood Risk and Coastal Change sets out Flood Risk Vulnerability and flood zone 'compatibility'. The site is in Flood Zone 2 and the development is 'More Vulnerable' therefore it is not necessary to complete the Exception Test.

PPG Flood Risk and Coastal Change defines that the lifetime of the development in terms of flood risk and coastal change is 100 years.

3.3 Application of the Sequential Test

It is for the Local Planning Authority, taking advice from the Environment Agency as appropriate, to consider the Sequential Test.

Large parts of the South Holland district between the River Welland and River Nene lie within Flood Zone 2 and 3. As such, opportunities to undertake the development at an alternative site with a lower flood risk are limited. At this location it is not possible to position the development on higher ground within the proposed site.

A search of the area surrounding Tydd Gote on Rightmove, Zoopla and On the Market did not identify sites for sale that could accommodate a residential dwelling.

The River Nene and River Welland have defences that provide protection during the 0.5% annual probability (1 in 200 chance each year) event including climate change. Therefore the 'actual risk' of flooding is low and the site is considered to pass the Sequential Test.

4.0 SITE SPECIFIC FLOOD RISK

4.1 Local Flood Assets

The site is 1.2 km west of the tidal River Nene. The site is protected by the River Nene tidal defences between Wisbech and Sutton Bridge. The River Nene is the responsibility of the Environment Agency.

There is a long-term strategy for the maintenance of the Environment Agency defences which is reviewed and updated every 5 years.

There is an extensive local drainage network managed by South Holland IDB. The site and the surrounding land are within the Free Discharge catchment and drain to the South Holland Main Drain and discharge to the tidal River Nene at the Sutton Bridge Outfall Sluice. The site is approximately 1.8km south of the South Holland Main Drain.

To the south of Station Road, the land is within North Level IDB. This area drains to the North Level Main Drain which is approximately 150m south of the site.

During the operation and maintenance of its pumping stations, associated structures and channel systems, the IDB seeks to maintain a general standard capable of providing flood protection to its district. A routine maintenance programme is in place to ensure that the Boards assets are commensurate with the standard of protection that is sought.

Current maintenance standards of the South Holland Internal Drainage Board, North Level Internal Drainage Board and the Environment Agency are generally good.

4.2 Sources of Flooding

The potential sources of flooding that have been identified during this assessment are:

- local blockages to the South Holland IDB drainage system;
- an event in the local drainage network greater that exceeds the standard of protection;
- failure of Sutton Bridge Outfall Sluice; and
- overtopping and/or breaching of the tidal River Nene.

4.3 Probability of Flooding

The probability of flooding associated with blockages in the South Holland IDB drainage system is low due to the maintenance standards achieved and managed by the IDB.

The standard of drainage provided by South Holland IDB is assessed at 2% annual probability (1 in 50 chance each year), compatible with the Department of the

Environment, Food and Rural Affairs (DEFRA) target level of service for rural drainage and flood defence works. The risk associated with flooding due to events greater than 2% annual probability (1 in 50 chance each year) is lowered due to the South Holland IDB high priority watercourses incorporating a freeboard. This provides storage during events greater than 2% annual probability (1 in 50 chance each year).

The maximum flood level in the North Level Main Drain is -1.65m OD and therefore the site is not at risk from this watercourse.

The site benefits from defences on the River Nene that provide protection during a 0.5% annual probability (1 in 200 chance each year) tidal event and a 1% annual probability (1 in 100 chance each year) fluvial event.

4.4 Historic Flooding

During the preparation of this assessment, no evidence was discovered of the site being flooded.

4.5 Climate Change

Climate change is likely to impact the site through increased rainfall intensity and duration affecting the local drainage network and increased flood levels. The River Nene tidal defences have been designed to include an allowance for climate change. In summary the existing systems and defences are appropriate for the design life of the development (i.e. 100 years).

4.6 Residual Risk

The South East Lincolnshire SFRA includes maps demonstrate that the site is not at risk during a breach in 2116. An extract from this map is shown in Figure 3 below.

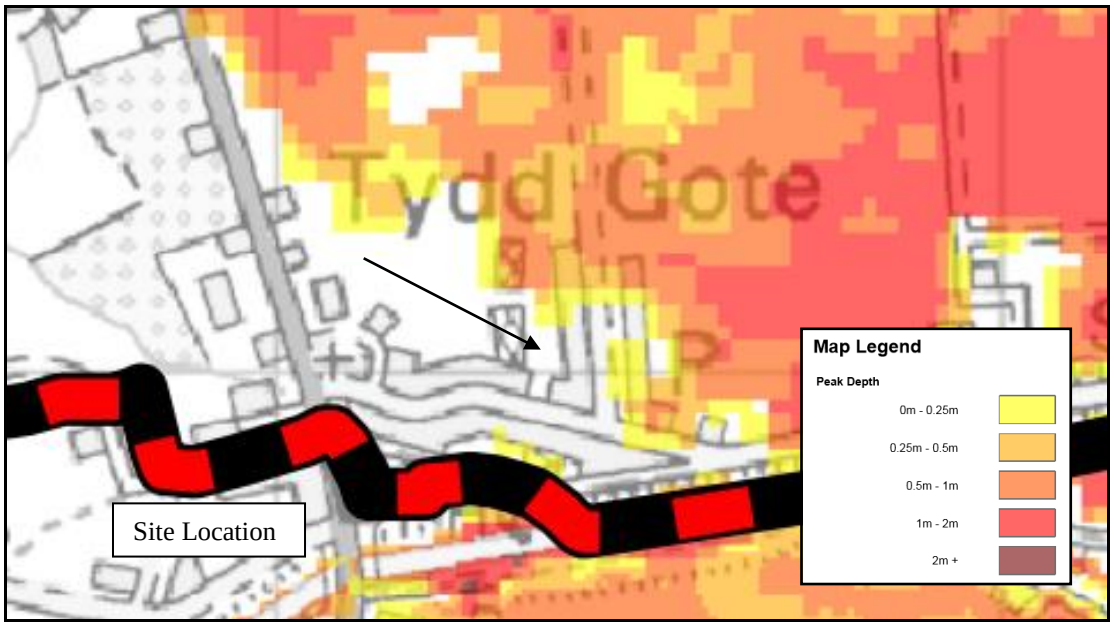


Figure 3 – SFRA 2116 Residual Peak Depth Map

5.0 FLOOD RISK MITIGATION

5.1 Summary of Risks

The probability of this development flooding from localised drainage systems is low. Failure of Sutton Bridge Outfall Sluice could lead to an increased level of risk at the site.

The probability of the site flooding from any Environment Agency system is less than 1% annual probability (1 in 100 chance each year) because of the standards of the existing flood defences. Over time there will be a gradual increase in risk to the site due to climate change. During the design life of the development it is not anticipated that the site would flood.

The SFRA considers the residual risk associated with overtopping and a breach in the defences in 2116. The site is not at risk.

The proposed development increases the impermeable area and therefore there is an increased volume of surface water that has the potential to increase flood risk.

5.2 Mitigation Measures

The site has a low 'actual risk' of flooding. Based upon the information available during the preparation of this flood risk assessment, to mitigate against the remote risk of flooding it is recommended that the floor level of the dwelling is 0.3m above surrounding ground levels. Furthermore, it is recommended that there is 0.3m of flood resilient construction above finished floor level.

The developer should ensure that the eventual occupier of the dwelling is sufficiently aware of the risk of flooding, and the standard of the existing defences. The Environment Agency provides a Flood Warning Service which includes Flood Warning Codes and uses direct warning methods where the risks and impacts of flooding are high.

In addition to direct and indirect flood warnings, the Environment Agency operates a 24 hour a day Floodline Service providing advice and information on flooding. The occupier of the dwelling should register with the Floodline Direct Warnings Service to receive any future flood warnings.

Should there be a failure of Sutton Bridge Outfall Sluice and conditions were such to put properties and land at risk of flooding, the Internal Drainage Board would take emergency action to maintain the drainage level of service by utilising temporary pumping equipment.

It is recommended that surface water run-off is discharged to soakaways to BRE365 design requirements and therefore water from the site will not affect any adjoining properties or increase the flood risk elsewhere.

6.0 CONCLUSIONS AND RECOMMENDATIONS

As a result of the assessment, the following conclusions have been reached.

- The proposed development comprises a new dwelling on Station Road, Tydd Gote.

- The proposed development is in a defended floodplain. It is in the floodplain of the tidal River Nene and protected during the 0.5% annual probability (1 in 200 chance each year) tidal event including climate change.

- The site is located within an Internal Drainage Board catchment with a minimum standard of drainage of 2% annual probability (1 in 50 chance each year) which accords with DEFRA guidelines for rural development. The risk of flooding is lowered further due to the South Holland IDB high priority watercourses incorporating a significant freeboard. This provides storage during events greater than 2% annual probability (1 in 50 chance each year).

- It is recommended that the finished floor level is 0.3m above surrounding ground levels and there is 0.3m of flood resilient construction above finished floor level. Surface water run-off from the development should be discharged to soakaways to BRE365 design requirements so that adjoining land and properties are not affected.

- The development passes the Sequential Test and is therefore suitable for the proposed location.

ATTACHMENT 1

PLANNING DRAWING 1
(Dwg 6176/01D)




Proposed Front Elevation 1:100


Proposed Side Elevation 1:100

Proposed Rear Elevation 1:100


Proposed Side Elevation 1:100

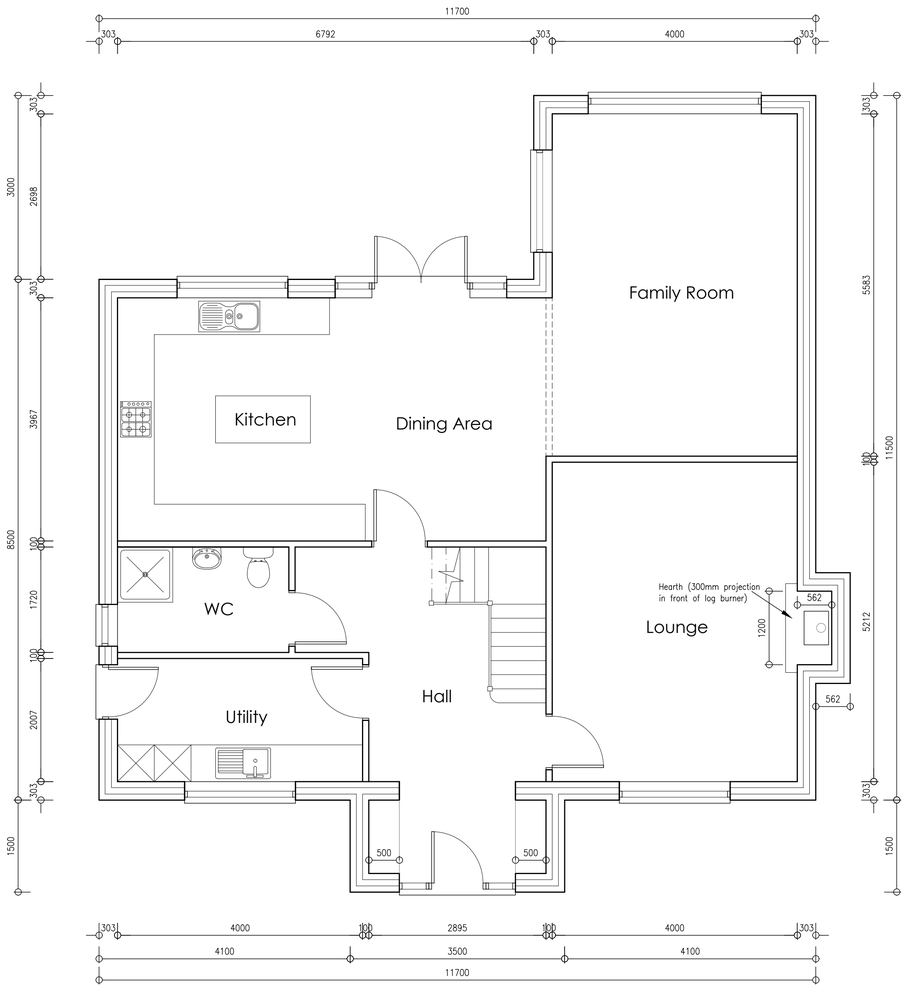

Proposed Ground Floor Plan 1:50

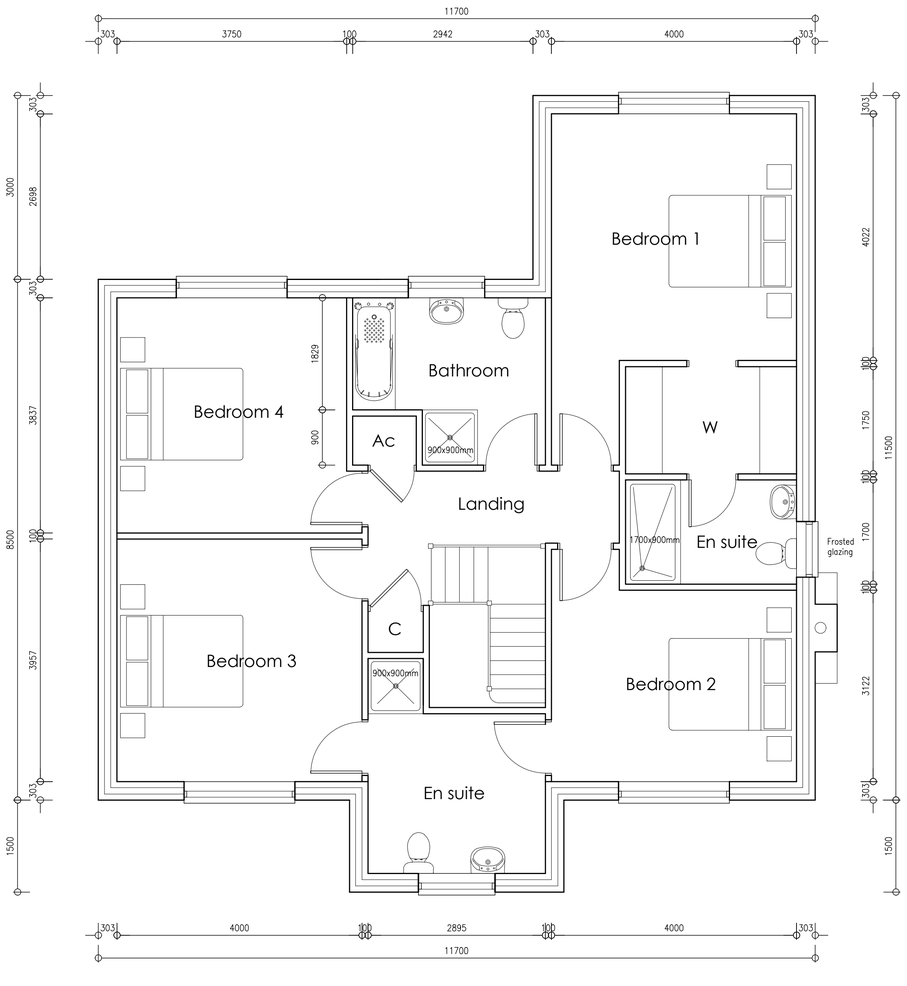

Proposed First Floor Plan 1:50

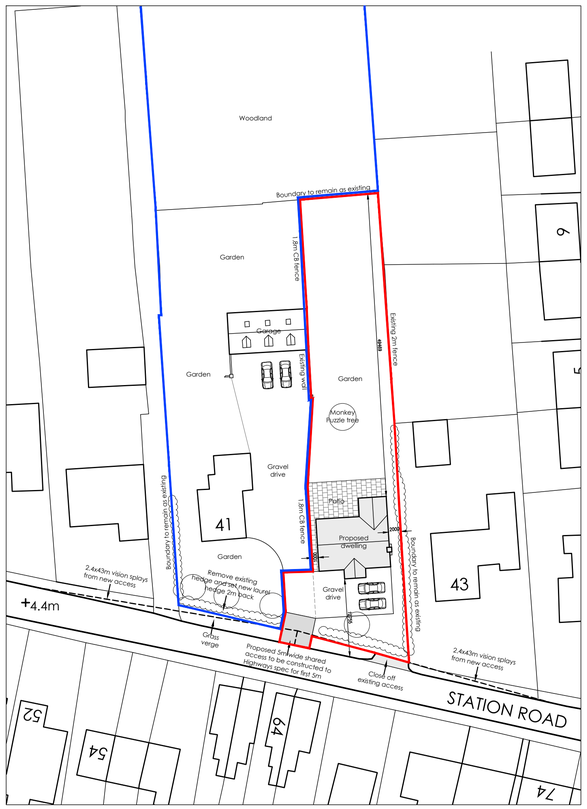

Proposed Site Plan 1:500

N

Peter Humphrey Associates
ARCHITECTURAL DESIGN AND BUILDING

PROJECT
Proposed Dwelling
Land adj. No.41
Station Road
Tydd Gote
PE13 5QA

DRAWING TITLE
PLANNING DRAWING 1

DATE June 20 SCALE AS SHOWN JOB No. 6176/01D

DO NOT SCALE FROM THIS DRAWING

COPYRIGHT: THIS DRAWING MUST NOT BE ISSUED, LOANED OR COPIED WITHOUT THE CONSENT OF PETER HUMPHREY ASSOCIATES

Peter Humphrey Associates
ARCHITECTURAL DESIGN AND BUILDING
TELEPHONE 01945 466 966
FAX 01945 466 433
E-MAIL: info@peterhumphrey.co.uk
31 OLD MARKET WISBECH CAMBS PE13 1NB
Fenland District Council
Building Design Awards
Building Excellence in Fenland
Category Winner 2008