

David Broker to Design Services
Concept 2000 Design & Development Ltd



PROPOSED FRONT ELEVATION

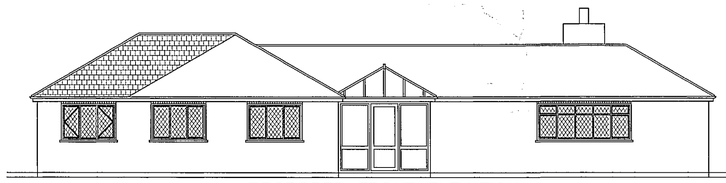


PROPOSED SIDE ELEVATION

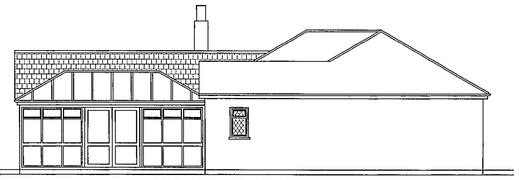


PROPOSED REAR ELEVATON

ROOF CONSTRUCTION
TILES TO MATCH EXISTING ON TYVEC BREATHER FELT
ON 25X38 BATTENS
ON CUT ROOF TIMBERS
CEILING JOISTS 15X38 @400 MM C-C
BINDERS 47X200 @ MID SPAN
RAFTERS 150X38 @ 400 MM C-C
PURLIN AT MID SPAN 47X200 MM
WALL PLATE 100X75 MM

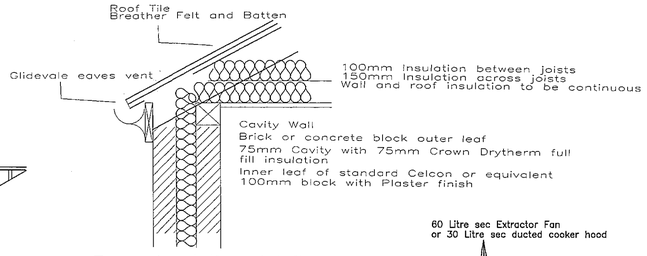


Eaves Insulation detail



Open Loft Roof Insulation



PROPOSED SIDE ELEVATION

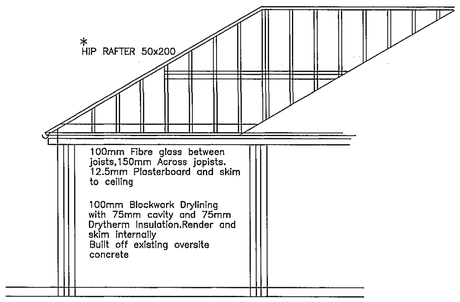


Existing floor to have new insulated floor laid over
100mm Jablite insulation
1200g Polythene dpm
18mm T/G Chipboard with 10mm perimeter gap for expansion

Remove existing garage door and frame take down reveals(retaining bricks) Rebuild to new window width toothing and bonding in new to existing bricks Excavte and form new concrete strip foundation 250 thick by 600mm wide concrete at existing foundation depth


Build in new upvc double glazed window with 'K' glass and trickle ventilators giving min 8,000mm sq vent
Build in IG Lintel above

PROPOSED FLOOR PLAN

Wall reveal Insulation

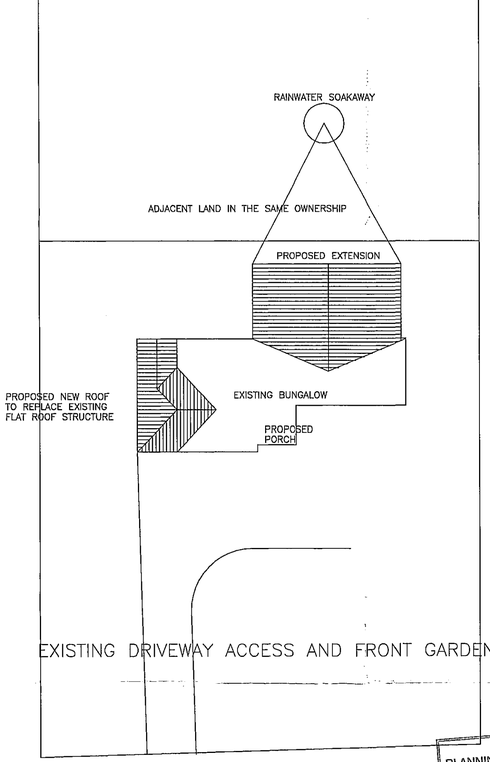

BLOCK PLAN SCALE 1:250

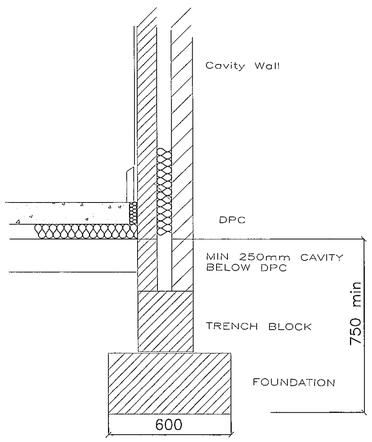

Wall and Floor Insulation

SHDC
PLANNING & DEVELOPMENT
- 3 MAR 2006
Ref. 1728/05

AMENDED PLAN
Ref. A2

CLIENT S PAYNE
DRAWING/FILE No 1029
PROJECT
PROPOSED EXTENSION AT
TYSDALE BUNGALOW
TYDD ST MARY
SCALE 1:50 1:100
DATE OCT 05
DRAWN DB

Issued	
Revisions	

ARCHITECTURAL TECHNICIANS
DANBROOKE HOUSE STATION ROAD
WISBECH ST MARY
WISBECH CAMBS.PE13 4RW
Telephone 01945410421
Facsimile 01945410400

DO NOT SCALE ALL DIMENSIONS TO BE VERIFIED ON SITE

THIS DRAWING AND DESIGN REMAINS THE COPYRIGHT OF DAVID BROKER AND MAY NOT BE REPRODUCED WITHOUT PERMISSION.

File: C:\WORK\1029 S PAYNE 2.dwg Plotted: 2006-03-01 10:53:17