

**FLOOD RISK ASSESSMENT
FOR RESIDENTIAL DEVELOPMENT AT
BROADGATE, WESTON HILLS**

FINAL REPORT

ECL0912/PDG ARCHITECTS

DATE JANUARY 2023

ELLINGHAM CONSULTING LTD

Email: tim@ellinghamconsulting.co.uk

CONTENTS

1.0 INTRODUCTION

2.0 SITE LOCATION AND DESCRIPTION

- 2.1 Site Location
- 2.2 Existing Site
- 2.3 Proposed Development
- 2.4 Local Development Documents
- 2.5 Available Flood Risk Information

3.0 FLOOD RISK VULNERABILITY

- 3.1 The Sequential and Exception Test
- 3.2 Vulnerability Classification
- 3.3 Application of the Sequential Test and Exception Test

4.0 SITE SPECIFIC FLOOD RISK

- 4.1 Local Flood Assets
- 4.2 Sources of Flooding
- 4.3 Probability of Flooding
- 4.4 Historic Flooding
- 4.5 Climate Change
- 4.6 Residual Risks

5.0 FLOOD RISK MITIGATION

- 5.1 Summary of Risks
- 5.2 Mitigation Measures

6.0 CONCLUSIONS

ATTACHMENT 1 – Proposed Site Plan (Dwg 22037/PL03)

ATTACHMENT 2 – Environment Agency Flood Risk Information

DISCLAIMER

This document has been prepared solely as a Flood Risk Assessment in support of a planning application for proposed residential development at Broadgate, Weston Hills. "Ellingham Consulting Ltd" accepts no responsibility or liability whatsoever for any use made of this document other than by the client the Farmer Educational Foundation for the purposes it was originally commissioned and prepared. All comments and opinions made are based upon information available to "Ellingham Consulting Ltd" during the necessary investigative process, and the conclusions and recommendations, could therefore, differ in the event of material subsequently being found erroneous, incomplete, or misleading. "Ellingham Consulting Ltd" therefore, accepts no liability should this prove to be the case.

1.0 INTRODUCTION

This Flood Risk Assessment has been prepared in accordance with National Planning Policy Framework (NPPF) and supporting planning practice guidance (PPG) on Flood Risk and Coastal Change.

In areas at risk of flooding or for sites of 1 hectare or more, developers are required to undertake a site-specific Flood Risk Assessment to accompany an application for planning permission. This Flood Risk Assessment has been produced on behalf of the Farmer Educational Foundation in respect of a development that consists of two dwellings at Broadgate, Weston Hills.

A planning application for the proposed development is to be submitted by PDG Architects.

2.0 SITE LOCATION AND DESCRIPTION

2.1 Site Location

The site is located on land between 357 and 363 Broadgate, Weston Hills, Spalding, PE12 6DB. The National Grid Reference of the site is 52777/32040.

The location of the site is shown in Figure 1.



Figure 1 – Location Plan (© OpenStreetMap contributors)

2.2 Existing Site

The site is on the eastern side of Broadgate. The site consists of agricultural land that has an access from Broadgate. There are dwellings to the north and south of the site and agricultural land to the east. The site area is approximately 0.19 hectares.

Environment Agency LiDAR data shows that the site is flat with ground levels typically between +2.9m OD and +3.1m OD. The carriageway level of Broadgate adjacent to the site +3.0m OD.

The site is in the South Holland Internal Drainage Board (IDB) District. Surface water at the site would naturally drain through soakaway and hence to the IDB drain system. There is a riparian drain 100m east of the site and an IDB Ordinary Watercourse 950m east of the site.

The online British Geological Survey maps indicate that the site is likely to be underlain by Oxford Clay Formation Mudstone. The bedrock is shown to be overlain with superficial deposits of clay and silt.

2.3 Proposed Development

The proposed development consists of two residential dwellings. The dwellings will be single storey. A Site Plan is provided in Attachment 1.

2.4 Local Development Documents

The South East Lincolnshire Local Plan 2011 – 2036, adopted in March 2019, is the Local Plan for the district. Policy 4: Approach to Flood Risk states the requirements for flood risk reduction.

The South East Lincolnshire Level 1 and Level 2 Strategic Flood Risk Assessment (SFRA) was prepared in June 2017.

The Joint Lincolnshire Flood Risk and Drainage Management Strategy has been prepared by Lincolnshire County Council as the Lead Local Flood Authority. The purpose of the Strategy is to increase the safety of people across Lincolnshire by reducing the number of people at risk of flooding, increasing the resilience of local communities, and reducing the impact of flooding.

2.5 Flood Zones

An extract from the Environment Agency Flood Map for Planning is shown in Figure 2. The site is located within Flood Zone 3, an area with a high probability of flooding.

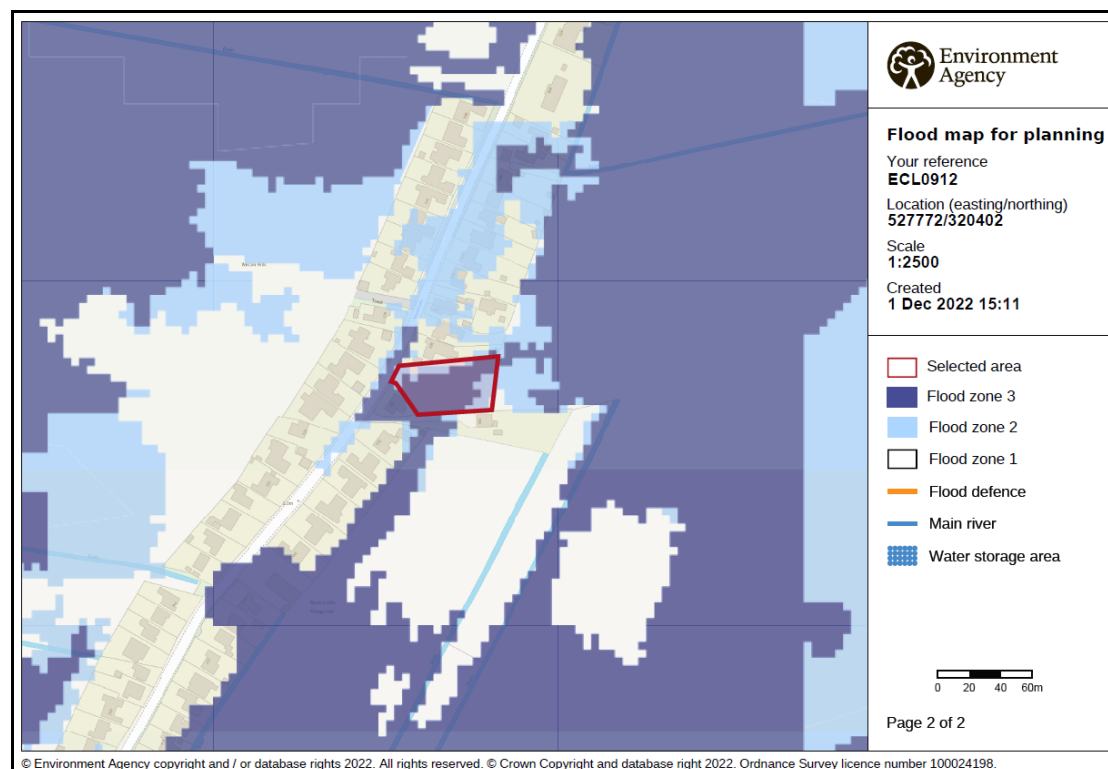


Figure 2 – Environment Agency Flood Map for Planning

The Environment Agency Long Term Flood Risk maps show that:

- the site has a medium risk of flooding from rivers or the sea (annual probability between 1% and 3.3%);
- the site has a very low risk of surface water flooding (annual probability less than 0.1%); and
- the site is at risk of reservoir flooding when river levels are normal.

Table 1 shows the level of risk at the site within the South East Lincolnshire SFRA.

SFRA Map	Present Day	2116
Residual Flood Hazard Map for the 1% fluvial and 0.5% tidal event	The site is outside the 'Low Hazard' area	The site is outside the 'Low Hazard' area
Residual Peak Depth Map for the 1% fluvial and 0.5% tidal	The site is outside the area at risk	The site is outside the area at risk

Table 1 – Flood Risk within SFRA Maps

3.0 FLOOD RISK VULNERABILITY

3.1 The Sequential and Exception Test

The NPPF requires the application of a Sequential Test to ensure that new development is in areas with the lowest probability of flooding.

The Exception Test is a method to demonstrate and help ensure that flood risk to people and property will be managed, while allowing necessary development to go ahead in situations where suitable sites at lower risk of flooding are not available.

3.2 Vulnerability Classification

Table 2 of the PPG Flood Risk and Coastal Change categorises different types of uses and development according to their vulnerability to flood risk. The proposed development is covered by the description of buildings used for dwellings and is classified as 'More Vulnerable'.

Table 3 of the PPG Flood Risk and Coastal Change sets out Flood Risk Vulnerability and flood zone 'compatibility'. The site is in Flood Zone 3 and the development is 'More Vulnerable' therefore it is necessary to complete the Exception Test.

PPG Flood Risk and Coastal Change defines that the lifetime of the development in terms of flood risk and coastal change is 100 years.

3.3 Application of the Sequential Test and Exception Test

It is for the Local Planning Authority, using the evidence provided and taking advice from the Environment Agency as appropriate, to consider whether an application passes the Sequential Test.

Large parts of the South Holland district between the River Welland and River Nene lie within Flood Zone 3. As such, opportunities to undertake the development at an alternative site with a lower flood risk are limited.

The SFRA states that as it is necessary to use the refined flood risk information (hazard and depth maps) to assist with the application of the sequential test. The refined flood risk information contained within the SFRA demonstrates the site is not at risk during the 1% annual probability fluvial and 0.5% annual probability tidal event including climate change. The site therefore has a low probability of flooding and is considered to pass the Sequential Test.

The Exception Test requires consideration of the wider sustainability benefits of a development and that the development would be safe and residual risks managed.

The Local Plan has a target of a net increase of at least 11,681 dwellings in South Holland over the 25-year local plan period. The Plan considers this new housing is

required to ensure the sustainability of the Local Plan area. The proposed development will contribute to this target.

Section 5 of this Flood Risk Assessment describes the flood mitigation measures and the management of the residual risks, demonstrating that this development will be safe and not increase flood risk elsewhere. The development is considered to pass the Exception Test.

4.0 SITE SPECIFIC FLOOD RISK

4.1 Local Flood Assets

The site is 3.6km east of the River Welland. Cowbit Wash is the floodplain to the River Welland and the land to the east is protected from the River Welland by the Cowbit Wash Barrier Bank.

The site is 2.3km south east of the Coronation Channel, a bypass channel of the River Welland. The embankments of the Coronation Channel were constructed in the 1950's to convey river flows around Spalding. The Coronation Channel together with the Crowland and Cowbit Washes offer flood reduction to Spalding and the surrounding district. The Cowbit Wash Barrier Bank and the Coronation Channel are the responsibility of the Environment Agency.

There is a long-term strategy for the maintenance of the Environment Agency defences which is reviewed and updated periodically.

There is an extensive local drainage network managed by South Holland IDB. There is an IDB Ordinary Watercourse 950m east of the site. The site and surrounding land are part of the Little Holland catchment and drain by gravity to Little Holland Pumping Station. The pumped water enters the South Holland Main Drain that discharges to the tidal River Nene at the Sutton Bridge Outfall Sluice.

During the operation and maintenance of its pumping stations, associated structures, and channel systems, the IDB seeks to maintain a general standard capable of providing flood protection to its district. A routine maintenance programme is in place to ensure that the Boards assets are commensurate with the standard of protection that is sought.

Current maintenance standards of the South Holland Internal Drainage Board and the Environment Agency are generally good.

4.2 Sources of Flooding

The potential sources of flooding that have been identified during this assessment are:

- local blockages to the South Holland IDB drainage system;
- an event in the local drainage network greater that exceeds the standard of protection;
- failure of Little Holland Pumping Station; and
- overtopping and/or breaching of the tidal River Welland.

4.3 Probability of Flooding

The probability of flooding associated with blockages in the South Holland IDB drainage system is low due to the maintenance standards achieved and managed by the IDB.

Through the operation and maintenance of the pumping stations and the channel system the Board seek to maintain a general standard capable to providing flood protection to agricultural land and developed areas of 1 in 20 years and 1 in 100 years, respectively. The risk associated with flood events that exceed the standard of protection provided is lowered due to the South Holland IDB main drains incorporating freeboard. This freeboard provides storage during the exceedance events.

The Coronation Channel earth embankment has a minimum crest level of +6.0m OD. The 1% annual probability (1 in 100 chance each year) peak flood level inclusive of climate change during the next 100 years in the River Welland is +5.45m OD. The Coronation Channel embankment provides a standard of protection of 1% annual probability (1 in 100 chance each year) with a minimum 0.55m freeboard.

The Cowbit Wash Barrier Bank is at a level of +5.90m OD and therefore provides 0.45m of freeboard above the flood level during the 1% annual probability (1 in 100 chance each year) event with climate change. The Cowbit Wash Barrier Bank falls within the Reservoirs Act 1975 legislation. As such it is regularly inspected by a Supervising Engineer who will assess its structural integrity to provide protection to people and property.

4.4 Historic Flooding

During the preparation of this assessment, no evidence was discovered of the site being flooded.

4.5 Climate Change

Climate change is likely to impact the site through increased rainfall intensity and duration affecting the local drainage network and increased tide levels.

The River Welland defences have been designed to include an allowance for climate change.

In summary the site is not at risk for the design life of the development (i.e., 100 years).

4.6 Residual Risk

The South East Lincolnshire SFRA includes maps demonstrating the impact of climate change in 2116. The Residual Peak Depth maps within the SFRA indicate the maximum flood depths associated with a breach of the tidal defences. These show

that when the climate change allowances are applied to the combination of a 1% annual probability (1 in 100 chance each year) fluvial event and a 0.5% annual probability (1 in 200 chance each year) tidal event the site is not at risk.

The proposed development includes single storey dwellings and therefore the finished floor level within these dwellings needs to consider the 0.1% annual probability (1 in 1000 chance each year) breach event in 2115. The Environment Agency provided 0.1% annual probability (1 in 1000 chance each year) maps for the site. An extract from this map is shown in Figure 3 which shows that the site is not at risk.

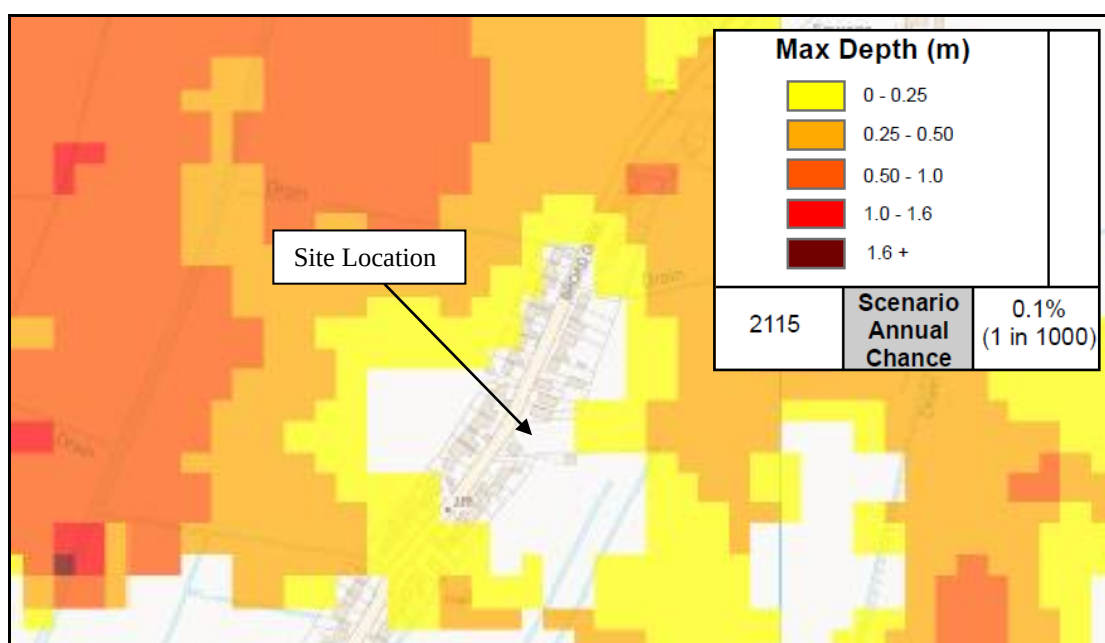


Figure 3 - Breach Hazard Map 0.1% Annual Probability (1 in 1000 Change Each Year)

5.0 FLOOD RISK MITIGATION

5.1 Summary of Risks

The probability of this development flooding from localised drainage systems is low. Failure of Little Holland Pumping Station could lead to an increased level of risk at the site.

The probability of the site flooding from any Environment Agency system is less than 0.5% annual probability (1 in 200 chance each year) because of the standards of the existing flood defences. Over time there will be a gradual increase in risk to the site due to climate change. During the design life of the development, it is not anticipated that the site would flood from overtopping of the defences.

Environment Agency Breach Hazard Mapping considers the residual risk associated with a breach in the defences in 2115. The maps show that the site is not at risk for events up to the 0.1% annual probability (1 in 1000 chance each year).

The proposed arrangement increases the impermeable area and therefore there will be an increased volume of surface water that has the potential to increase flood risk.

5.2 Mitigation Measures

Based upon the information available during the preparation of this flood risk assessment, it is recommended that the floor level of the dwellings is 0.3m above site levels and there is flood resilient construction to a height 0.3m above finished floor level.

The developer should ensure that the eventual occupiers of the dwellings are sufficiently aware of the risk of flooding, and the standard of the existing defences. The Environment Agency operates a flood warning system for properties at risk of flooding to enable householders to protect life or take actions to manage the effect of flooding on property. Floodline Warnings Service is a national system run by the Environment Agency for broadcasting flooding warnings. The occupier of the dwellings should register to receive flood warnings.

Should there be a failure of Little Holland Pumping Station and conditions were such to put properties and land at risk of flooding, the Internal Drainage Board would take emergency action to maintain the drainage level of service by using temporary pumping equipment.

It is recommended that surface water run-off is managed so that stormwater from the site will not affect any adjoining properties or increase the flood risk elsewhere.



6.0 CONCLUSIONS

As a result of the assessment, the following conclusions have been reached.


- The proposed development consists of two single storey dwellings on land between 357 and 363 Broadgate, Weston Hills, Spalding.
- The site is located within an Internal Drainage Board catchment and through the operation and maintenance of the pumping stations and the channel system the Board seek to maintain a general standard capable to providing flood protection to agricultural land and developed areas of 1 in 20 and 1 in 100 years, respectively.
- The proposed development is in Flood Zone 3. The development is protected by defences during the 1% annual probability (1 in 100 chance each year) fluvial event and 0.5% annual probability (1 in 200 chance each year) tidal event including an allowance for climate change. The site is not at risk during a breach of the tidal defences.
- It is recommended that the finished floor levels are 0.3m above site levels and there is 0.3m of flood resilient construction above finished floor level.
- The development passes the Sequential Test and Exception Test and is therefore suitable for the proposed location.

ATTACHMENT 1

PROPOSED SITE PLAN (DWG 22037/PL03)

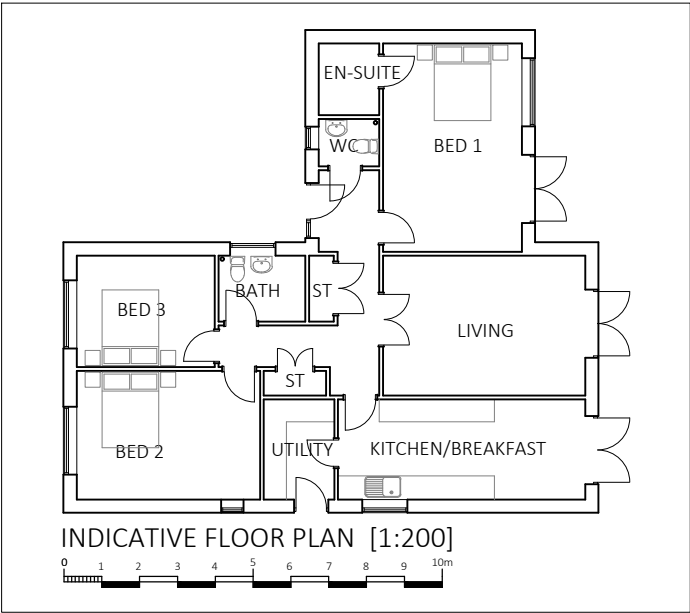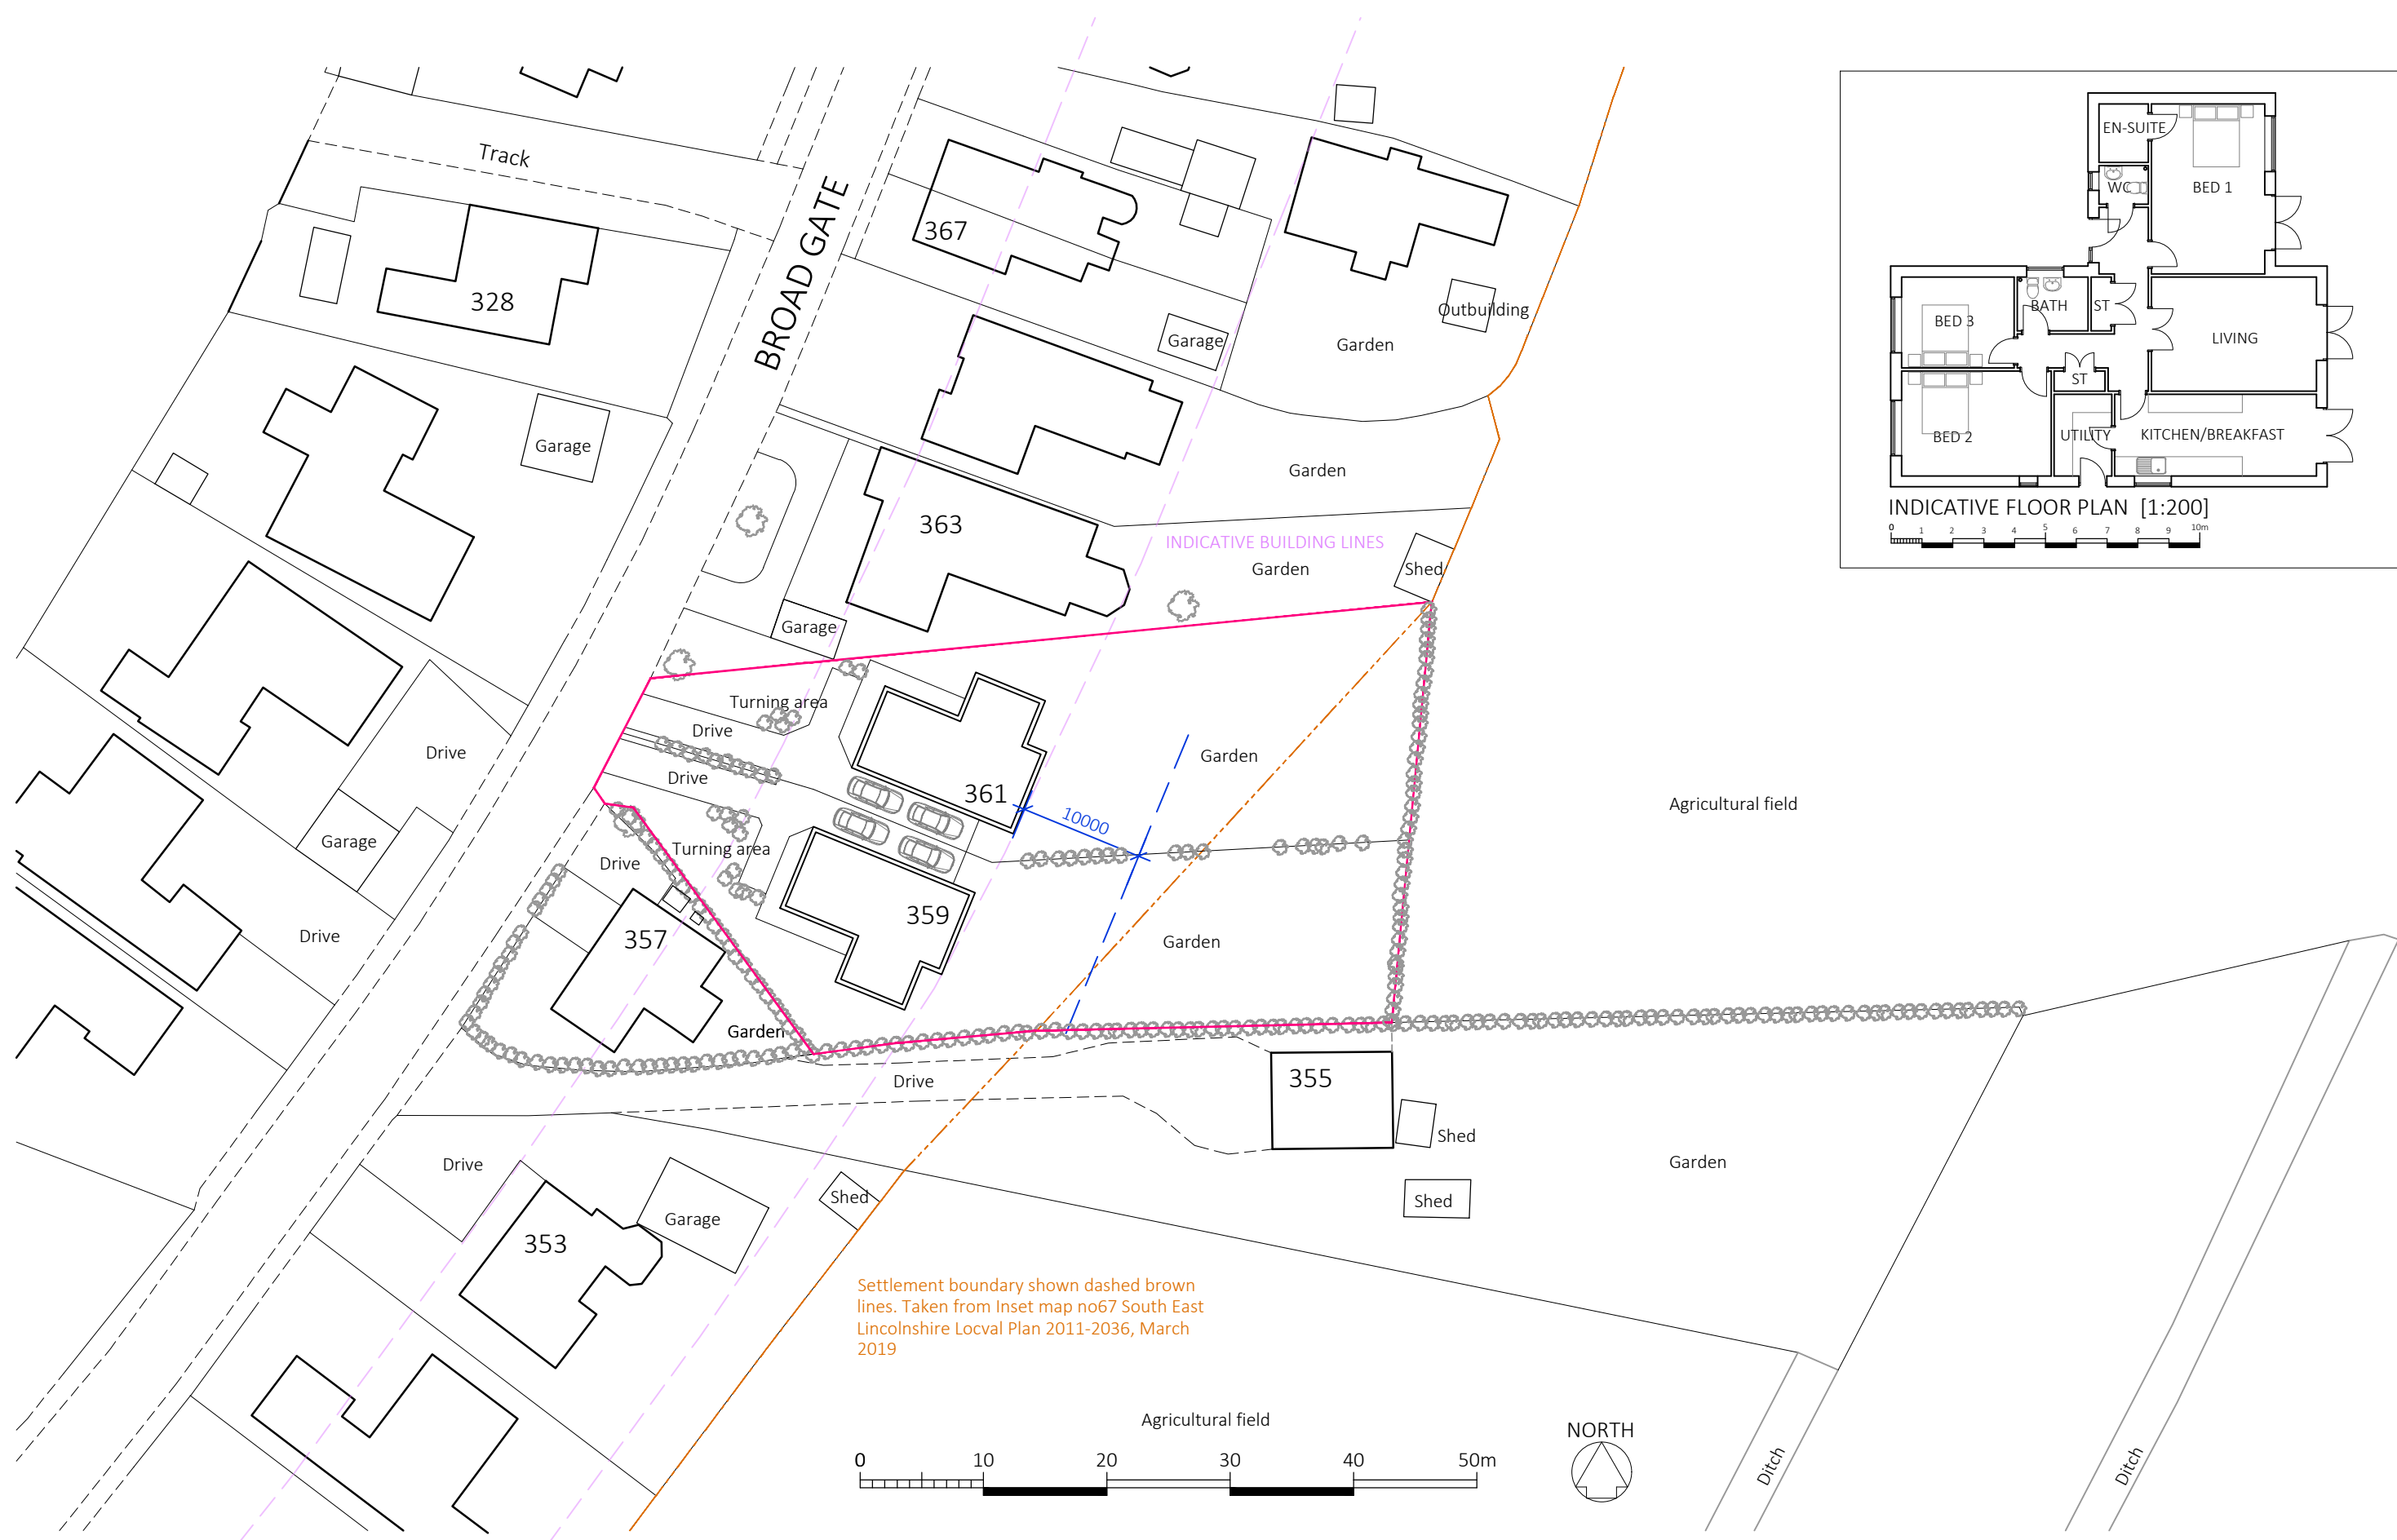

Settlement boundary shown dashed brown lines. Taken from Inset map no67 South East Lincolnshire Local Plan 2011-2036, March 2019



RESIDENTIAL DEVELOPMENT, LAND BETWEEN
357 & 363 BROADGATE, WESTON HILLS
PROPOSED SITE PLAN
Scale: 1:500/200@A3 Date: 11/2022
Drawn: CRB Dwg No: 22037/PL03

PDG ARCHITECTS LTD
1 Eaglethorpe Barns,
Eaglethorpe, Warrington,
Peterborough, PE8 6TJ
T: 01733 371000
E: design@pdgarchitects.co.uk
W: www.pdgarchitects.co.uk

ATTACHMENT 2

ENVIRONMENT AGENCY FLOOD RISK INFORMATION

Tim Ellingham
tim@ellinghamconsulting.co.uk

Our ref: CCN-2022-291623

Date: 15/12/2022

Dear Tim,

Provision of Flood Risk Information for Broadgate, Weston Hills

Thank you for your request for our flood risk information for the above site. The information is set out below and attached. It is important you read any contextual notes on the maps provided.

If you are preparing a Flood Risk Assessment (FRA) for this site, please note this information may not be sufficient by itself to produce an adequate FRA to demonstrate the development is safe over its lifetime. Additional information may be required to carry out an appropriate assessment of all risk, such as consequence of a breach in defences.

We aim to review our information on a regular basis, so if you are using this data more than twelve months from the date of this letter, please contact us again to check it is still valid.

1. Flood Map

The attached map includes the current Flood Map for your area. The Flood Map indicates the area at risk of flooding, **assuming no flood defences exist**, for a flood with a 0.5% chance of occurring in any year for flooding from the sea, or a 1% chance of occurring for fluvial (river) flooding. It also shows the extent of the Extreme Flood Outline which represents the extent of a flood with a 0.1% chance of occurring in any year, or the highest recorded historic extent if greater.

In some locations, such as around the fens and the large coastal floodplains, showing the area at risk of flooding assuming no defences may give a slightly misleading picture in that if there were no flood defences, water would spread out across these large floodplains. This flooding could cover large areas of land but to relatively shallow depths and could leave pockets of locally slightly higher land as isolated dry islands. It is important to understand the actual risk of the flooding to these dry islands, particularly in the event of defence failure.

The Flood Map also shows the location of formal raised flood defences and flood storage reservoirs. It represents areas at risk of flooding for present day only and does not take account of climate change.

The Flood Map only indicates the extent and likelihood of flooding from rivers or the sea. It should also be remembered flooding may occur from other sources such as surface water sewers, road drainage, etc.

2. Historic Flood Event Outlines

With regards to the history of flooding I can advise we do not have any records of flooding in this area. It is possible recent flooding may have occurred which we are currently investigating, therefore this information may be subject to change. It is possible other flooding may have occurred which other risk management authorities, such as the Lead Local Flood Authority (i.e. top tier council) or Internal Drainage Board (where they exist) have responsibility.

Ceres House, Searby Road, Lincoln, LN2 4DW
Customer services line: 03708 506 506
Email: enquiries@environment-agency.gov.uk
www.gov.uk/environment-agency

Calls to 03 numbers cost the same as calls to standard geographic (i.e. numbers beginning with 01 or 02)

3. Schemes in the area

There are no ongoing capital projects to reduce or sustain the current flood risk to this site.

4. Fluvial Flood Risk Information

This site is not at risk of flooding from any Main River. The site may be at risk from local ordinary watercourses for which other risk management authorities, such as the Lead Local Flood Authority (i.e. top tier council) or Internal Drainage Board (where they exist) have responsibility.

5. Tidal Flood Risk Information

5.1 Tidal Defence Information

The existing tidal defences protecting this site consist of earth embankments.

They are in fair condition and reduce the risk of flooding (at the defence) to a 1% (1 in 100) chance of occurring in any year. We inspect these defences routinely to ensure potential defects are identified.

Refer to paragraph 3 for details of any ongoing capital projects to reduce the flood risk to this site.

5.2 Tidal Flood Levels

The attached data sheets show our current best estimate for extreme tide levels.

Please read the information notes on the data sheets.

5.3 Tidal Hazard Mapping

For certain locations we have carried out modelling to map the maximum values of flood depth, velocity and hazard rating (danger to people) resulting from overtopping and / or breaching of defences at specific locations for a number of scenarios.

At present this information is available along the full coastal / tidal floodplain, except the tidal Witham Haven in Boston (upstream of Hobhole) where only breaching and not overtopping has been modelled and the tidal River Welland upstream of Fosdyke Bridge where neither breaching nor overtopping are available.

The number of locations we have this information for is expected to increase in time.

The attached maps show the maximum values of flood depth, velocity and hazard rating (danger to people) resulting from breaching of the defences at specific locations for the scenarios below. For some locations the breach mapping also includes flooding from overtopping if this is expected in that scenario. The location of modelled tidal breaches is shown on a separate attached map.

5.3.1 Tidal Hazard Mapping - Breaches

- Year 2006 0.5% (1 in 200) chance
- Year 2006 0.1% (1 in 1000) chance
- Year 2115 0.5% (1 in 200) chance
- Year 2115 0.1% (1 in 1000) chance

5.3.2 Tidal Hazard Mapping - Overtopping

Your site is not affected by overtopping of the defences for the present day (2006) and climate change (2115) scenarios.

6. Development Planning

If you would like local guidance on preparing a flood risk assessment for a planning application, please contact our Sustainable Places team at LNplanning@environment-agency.gov.uk. It will help if you mention this data request and attach your site location plan.

We provide free preliminary advice; additional/detailed advice, review of draft FRAs and meetings are chargeable at a rate set to cover our costs, currently £100 (plus VAT) per hour of staff time. Further details are available on our website at <https://www.gov.uk/guidance/developers-get-environmental-advice-on-your-planning-proposals>.

General advice on flood risk assessment for planning applications can be found on GOV.UK at <https://www.gov.uk/guidance/flood-risk-assessment-for-planning-applications>

Climate change will increase flood risk due to overtopping of defences. Please note, unless specified otherwise, the climate change data included has an allowance for 20% increase in flow. Updated guidance on how climate change could affect flood risk to new development - 'Flood risk assessments: climate change allowances' was published on GOV.UK in **July 2021**. The appropriate updated climate change allowance should be applied in a Flood Risk Assessment.

You should also consult the Strategic Flood Risk Assessment produced by your local planning authority.

7. Data Licence and Other Supporting Information

We respond to requests for recorded information we hold under the Freedom of Information Act 2000 (FOIA) and the associated Environmental Information Regulations 2004 (EIR).

This information is provided in accordance with the Open Government Licence which can be found here: <http://www.nationalarchives.gov.uk/doc/open-government-licence/version/3/>

Further information on flood risk can be found on the GOV.UK website at: <https://www.gov.uk/browse/environment-countryside/flooding-extreme-weather>

8. Other Flood Risk Management Authorities

The information provided with this letter relates to flood risk from main river or the sea. Additional information may be available from other risk management authorities, such as the Lead Local Flood Authority (i.e. top tier council) or Internal Drainage Board (where they exist).

Ceres House, Searby Road, Lincoln, LN2 4DW
Customer services line: 03708 506 506
Email: enquiries@environment-agency.gov.uk
www.gov.uk/environment-agency

Calls to 03 numbers cost the same as calls to standard geographic (i.e. numbers beginning with 01 or 02)

I hope we have correctly interpreted your request. If you have any queries or would like to discuss the content of this letter further please contact Alexander Tan using the email address below and quoting our CCN reference number above.

Yours sincerely,




for Alastair Windler
Welland and Nene Partnerships and Strategic Overview Team Leader
e-mail PSOWN@environment-agency.gov.uk

Enc.
Flood Map
Tidal Level Data Sheets - Map and Tables
Tidal Breach Points – Locations Map
Hazard Mapping – Breaching

Ceres House, Searby Road, Lincoln, LN2 4DW
Customer services line: 03708 506 506
Email: enquiries@environment-agency.gov.uk
www.gov.uk/environment-agency

Calls to 03 numbers cost the same as calls to standard geographic (i.e. numbers beginning with 01 or 02)

Flood Map centred on TF 27772 20402 - created December 2022 [Ref: CCN-2022-291623]

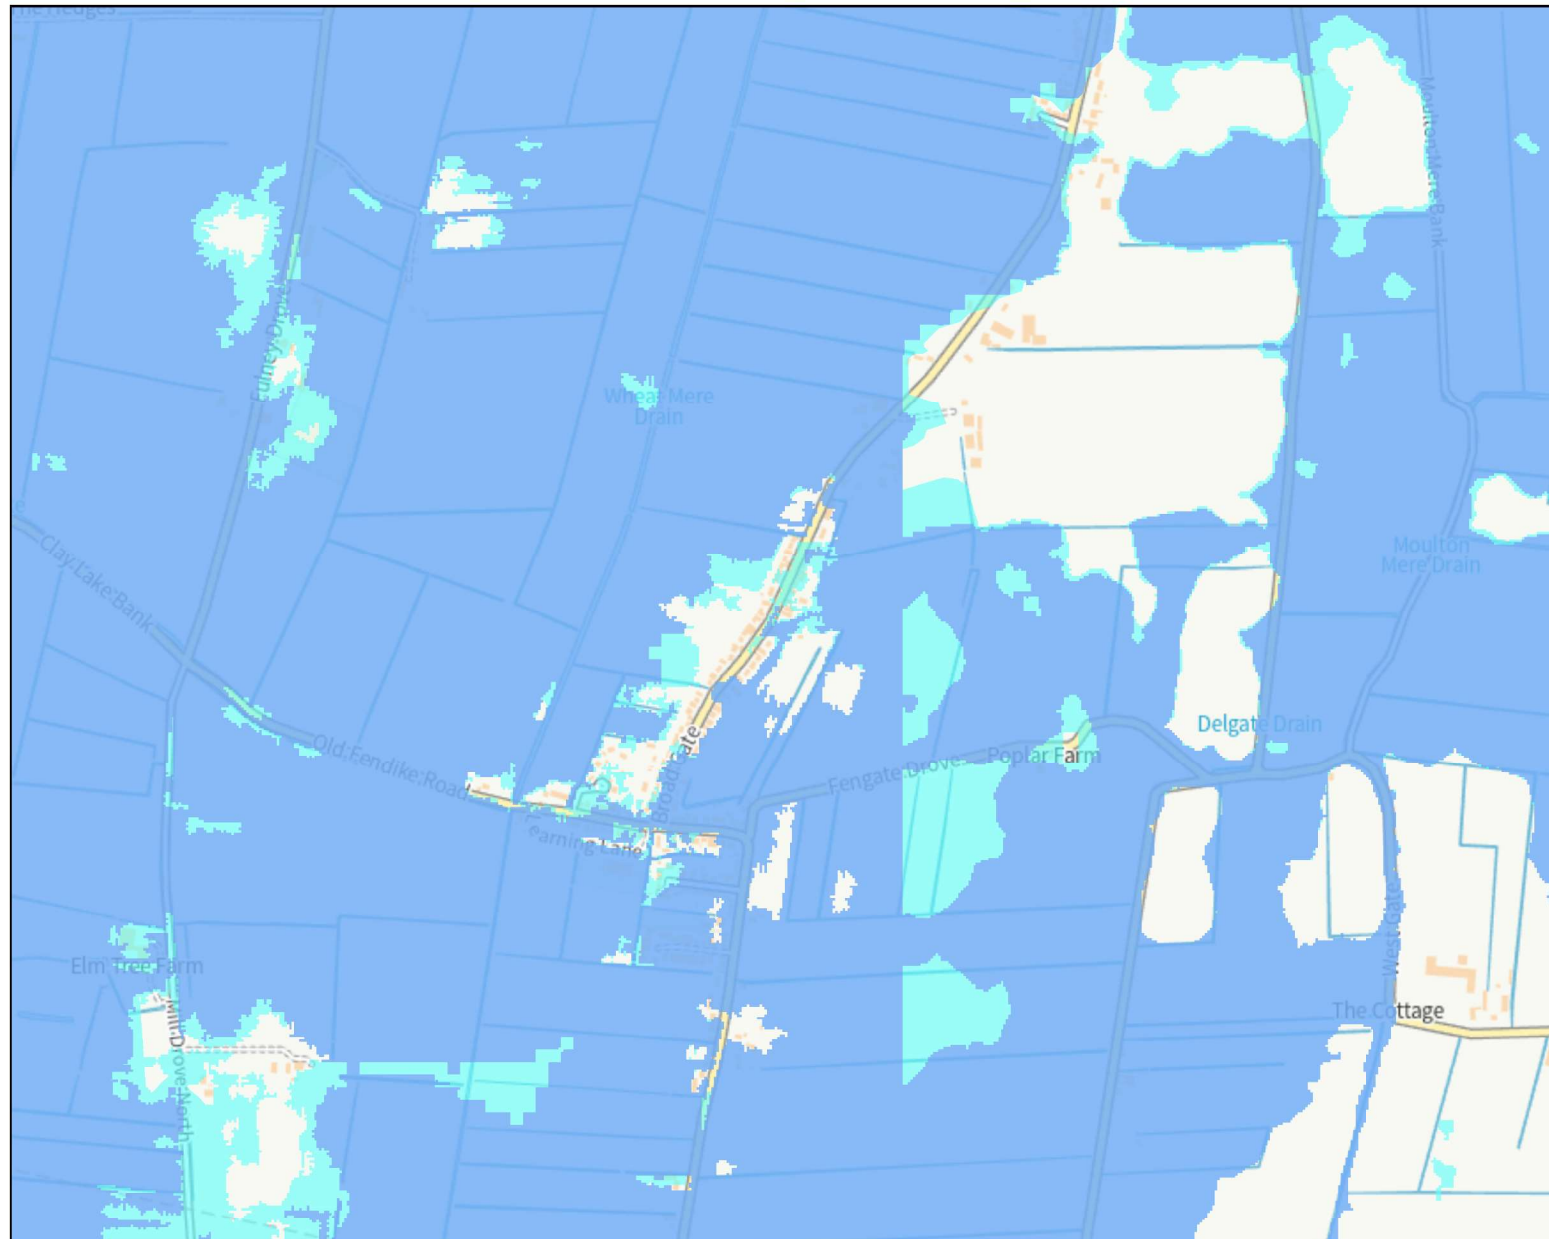

Scale 1:10,000



Legend

- Raised Defences
- ▨ Flood Storage Areas
- Areas at Risk of Flooding from Rivers or the Sea
- Extreme Flood Outline

Dark blue shows the area that could be affected by flooding, either from rivers or the sea, if there were no flood defences. This area could be flooded:

- from the sea by a flood that has a 0.5% (1 in 200) or greater chance of happening each year.
- or from a river by a flood that has a 1% (1 in 100) or greater chance of happening each year.

Light blue shows the extent of the Extreme Flood Outline, which represents the extent of a flood event with a 0.1% chance of occurring in any year, or the highest recorded historic extent if greater.

These two colours show the extent of the natural floodplain if there were no flood defences or certain other manmade structures and channel improvements. Sites outside the two extents, but behind raised defences, may be affected by flooding if the defences are overtopped or fail.

Created by the Partnerships and Strategic Overview Team, Kettering

East Coast and Wash - 2018 Coastal Flood Boundary [CFB] Dataset

Key Node Points



Scale 1:550,000



▲ East Coast and Wash

See separate data sheet for predicted flood levels

Created by the Partnerships and Strategic Overview Team, Lincoln

© Environment Agency copyright and / or database rights 2022. All rights reserved. © Crown Copyright and database rights 2022 Ordnance Survey 100024198.

Contact Us: National Customer Contact Centre, PO Box 544, Rotherham, S60 1BY. Tel: 03708 506 506 (Mon-Fri 8-6). Email: enquiries@environment-agency.gov.uk

East Coast and Wash: Immingham to the West Lighthouse

2018 Coastal Flood Boundary Extreme Sea Levels

CFB REF	LOCATION	EASTING	NORTHING	ANNUAL CHANCE (1 IN X) OF TIDE LEVEL IN METRES ODN																					
				1			10			50			100			200			300			1000			
				Confidence Bound			Confidence Bound			Confidence Bound			Confidence Bound			Confidence Bound			Confidence Bound			Confidence Bound			
				2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%	
3888	Immingham	520440	417625	4.16	4.17	4.19	4.50	4.53	4.62	4.73	4.80	5.00	4.83	4.93	5.19	4.93	5.06	5.41	4.98	5.14	5.55	5.15	5.38	6.01	
3890	Haborough Marsh	522100	416512	4.14	4.15	4.17	4.48	4.51	4.60	4.70	4.77	4.97	4.80	4.90	5.16	4.90	5.03	5.38	4.94	5.10	5.51	5.11	5.34	5.97	
3898	Grimsby	529295	413162	3.98	3.99	4.01	4.31	4.34	4.43	4.53	4.60	4.80	4.61	4.71	4.97	4.71	4.84	5.19	4.74	4.90	5.31	4.88	5.11	5.74	
3906	Buck Beck	534709	407369	3.87	3.88	3.90	4.19	4.23	4.31	4.41	4.50	4.68	4.50	4.61	4.86	4.61	4.75	5.10	4.64	4.82	5.22	4.80	5.05	5.66	
3910	Tetney	538035	405537	3.85	3.86	3.89	4.17	4.22	4.30	4.40	4.50	4.67	4.49	4.61	4.86	4.60	4.75	5.10	4.63	4.82	5.21	4.80	5.06	5.66	
3918	Donna Nook	544641	401997	3.82	3.83	3.86	4.14	4.19	4.27	4.38	4.48	4.65	4.47	4.60	4.85	4.58	4.74	5.10	4.63	4.82	5.22	4.81	5.08	5.68	
3928	Saltfleet	549131	393360	3.78	3.79	3.82	4.11	4.16	4.26	4.36	4.46	4.64	4.47	4.59	4.86	4.57	4.74	5.11	4.63	4.83	5.25	4.83	5.11	5.74	
3942	Boygrift	555131	380860	3.72	3.74	3.77	4.06	4.11	4.22	4.33	4.43	4.65	4.43	4.57	4.87	4.56	4.73	5.13	4.62	4.83	5.28	4.85	5.15	5.82	
3968	Gibraltar Point	557652	356181	4.16	4.17	4.20	4.51	4.56	4.67	4.76	4.85	5.08	4.85	4.97	5.27	4.94	5.10	5.49	4.99	5.18	5.63	5.14	5.41	6.09	
3992_14	Hobhole	535990	340116	4.96	4.97	5.01	5.40	5.44	5.56	5.66	5.76	5.98	5.78	5.90	6.20	5.88	6.04	6.44	5.92	6.11	6.57	6.03	6.31	6.99	
	Grand Sluice*	532366	344510	4.93	4.94	4.98	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3		
3992_9	Boston Barrier	532754	342852	4.93	4.94	4.98	5.41	5.45	5.57	5.73	5.83	6.05	5.85	5.97	6.27	5.93	6.09	6.49	5.94	6.13	6.59	5.98	6.26	6.94	
3992_5	Fosdyke Bridge	531886	332234	4.87	4.88	4.92	5.31	5.35	5.47	5.58	5.68	5.90	5.71	5.83	6.13	5.82	5.98	6.38	5.87	6.06	6.52	6.01	6.29	6.97	
4008	West Lighthouse	550094	329971	4.87	4.88	4.91	5.21	5.26	5.37	5.46	5.56	5.78	5.56	5.68	5.98	5.66	5.82	6.21	5.71	5.90	6.35	5.86	6.14	6.81	
-	Marsh Road	525988	324065	-	5.04	-	-	5.44	-	-	5.73	-	-	5.85	-	-	5.98	-	-	-	-	-	-	-	
-	Wisbech	546110	309940	-	4.83	-	-	5.25	-	-	5.53	-	-	5.66	-	-	5.78	-	-	-	-	-	-	-	
-	Dog-in-a-Doublet	527200	299287	-	3.67	-	-	4.00	-	-	4.22	-	-	4.32	-	-	4.42	-	-	-	-	-	-	-	

See next page for notes

East Coast and Wash: Immingham to the West Lighthouse

2018 Coastal Flood Boundary Extreme Sea Levels

NOTES:

The following notes apply to all CFB sites (ie all on table excluding Marsh Road, Wisbech, Dog-in-a-Doublet)




- The base date for the data is 2017.
- The levels are still water levels. Depending on the use of the data it may be necessary to consider wave heights and / or joint probability analysis of water level and other variables.
- Levels for other annual chance probabilities are available if required.
- For additional information relating to the 2018 Coastal Flood Boundary Extreme Sea Levels or to access the full dataset for the above sites or intermediate locations refer to the Defra Metadata Catalogue at <https://deframetadata.com/geonetwork/srv/eng/catalog.search#/metadata/84a5c7c0-d465-11e4-b0bd-f0def148f590>

The following notes apply to all Marsh Road, Wisbech, Dog-in-a-Doublet

- The base date for the data is 2006
- The levels are still water levels. Depending on the use of the data it may be necessary to consider wave heights and / or joint probability analysis of water level and other variables.
- Levels for other annual chance probabilities are available if required.
- These levels will be updated as their respective tidal river models are updated.

The following notes apply to Grand Sluice

- The data is based on CFB 2018 data for Boston Barrier site, capped at 5.3mAOD to reflect use of the barrier.
- The base date for the data is 2017
- The levels are still water levels. Depending on the use of the data it may be necessary to consider wave heights and / or joint probability analysis of water level and other variables.
- For additional information relating to the 2018 Coastal Flood Boundary Extreme Sea Levels or to access the full dataset for the above sites or intermediate locations refer to the Defra Metadata Catalogue at <https://deframetadata.com/geonetwork/srv/eng/catalog.search#/metadata/84a5c7c0-d465-11e4-b0bd-f0def148f590>

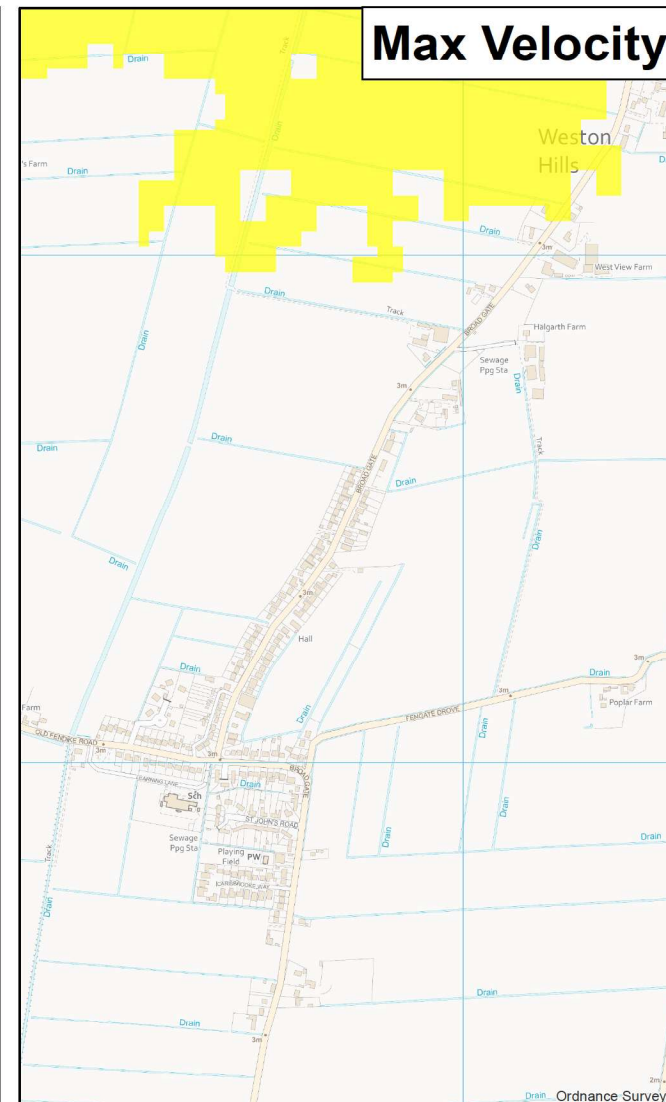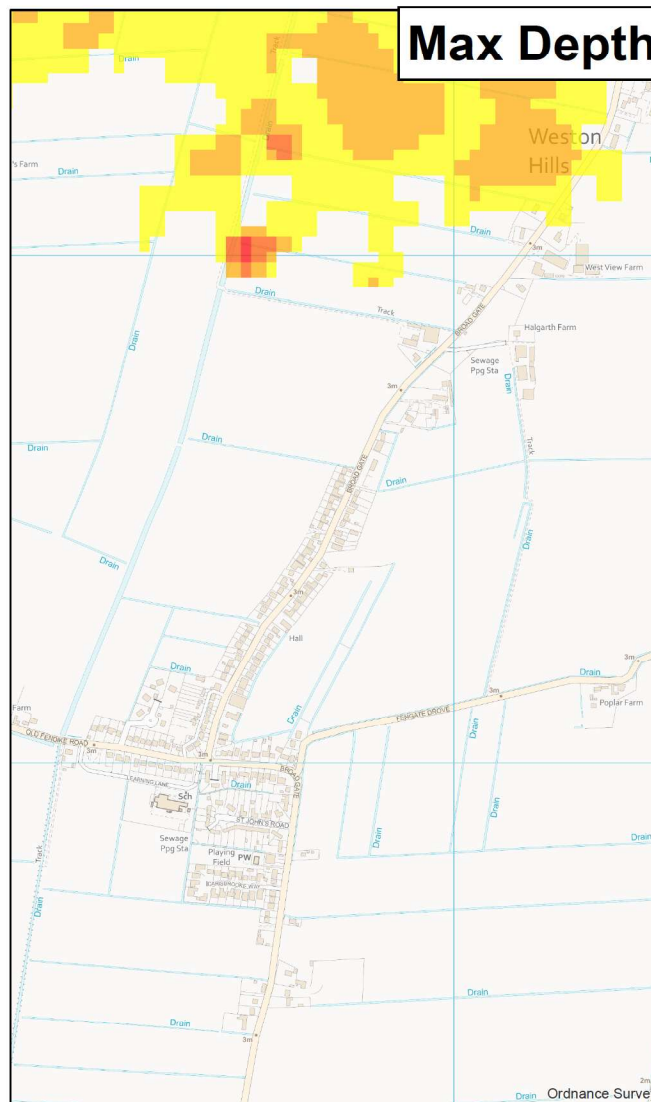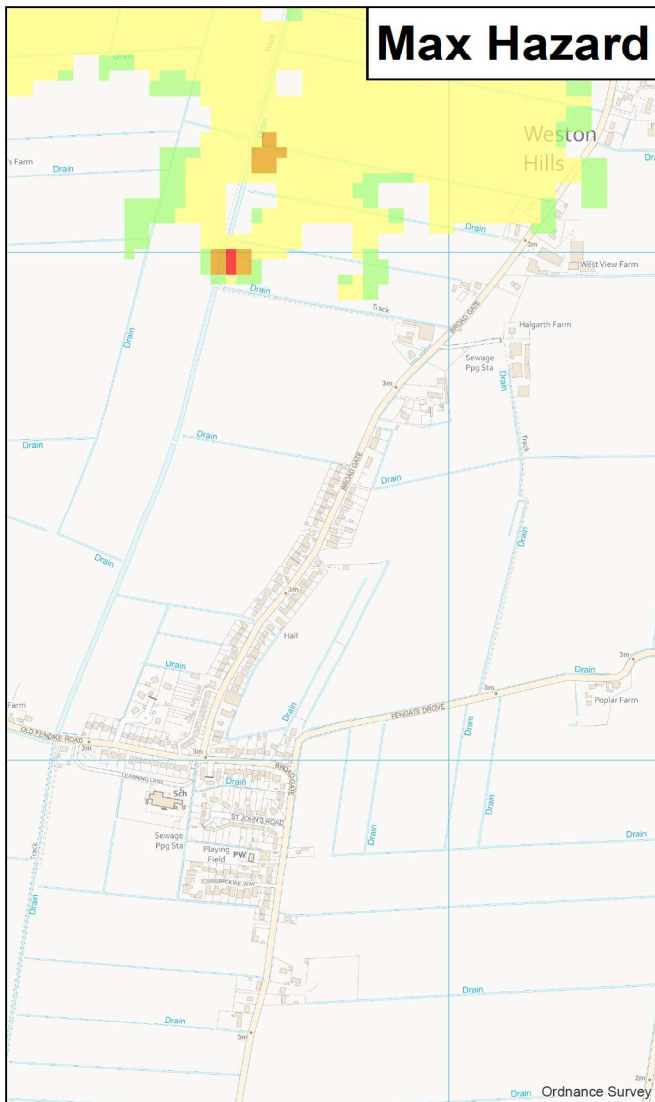

★ Modelled Breach Locations - see also the accompanying plan "Location of Modelled Breaches"							
Max Hazard (Flood Risk to People : FD2320)		Max Depth (m)		Max Velocity (m/s)			
	Less than 0.75 (Low Hazard)		0 - 0.25		0 - 0.3		
	Between 0.75 and 1.25 (Danger for Some)		0.25 - 0.50		0.3 - 1.0		
	Between 1.25 and 2.0 (Danger for Most)		0.50 - 1.0		1.0 - 1.5		
	Greater than 2.0 (Danger for All)		1.0 - 1.6		1.5 - 2.5		
			1.6 +		2.5 +		
Date Printed	December 2022	Scenario year	2006	Scenario Annual Chance	0.1% (1 in 1000)	CCN Number	CCN-2022-291623

This map shows the level of flood hazard to people (called a hazard rating) if our flood defences are breached at certain locations, for a range of scenarios. The hazard rating depends on the depth and velocity of floodwater, and maximum values of these are also mapped.

The map is based on computer modelling of simulated breaches at specific locations. Each breach has been modelled individually and the results combined to create this map. Multiple breaches, other combinations of breaches, different sized tidal surges or flood flows may all give different results.

The map only considers the consequences of a breach, it does not make any assumption about the likelihood of a breach occurring. The likelihood of a breach occurring will depend on a number of different factors, including the construction and condition of the defences in the area. A breach is less likely where defences are of a good standard, but a risk of breaching remains.




General Enquiries No: 03708 506 506. Weekday Daytime calls cost 5p plus up to 6p per minute from BT Weekend Unlimited. Mobile and other providers' charges may vary



Lincolnshire and Northamptonshire Tidal Breaching Hazard Mapping

Map Centred on TF 27772 20402

This map is reproduced by permission of Ordnance Survey on behalf of The Controller of Her Majesty's Stationary Office. Crown copyright. All rights reserved. Environment Agency 100024198, 2022. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.

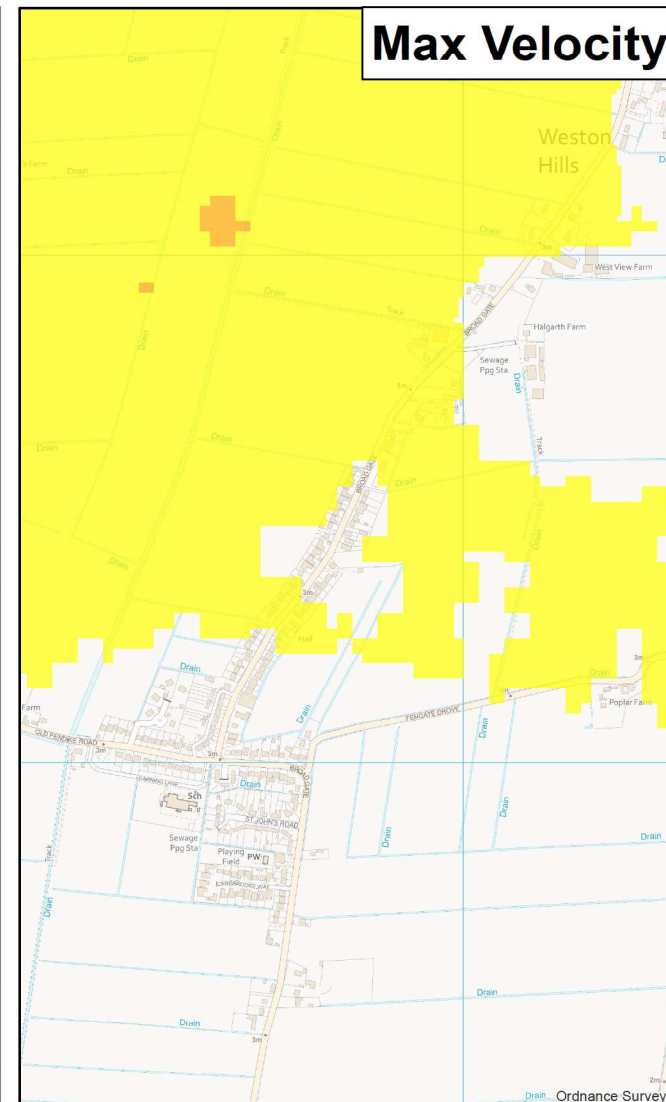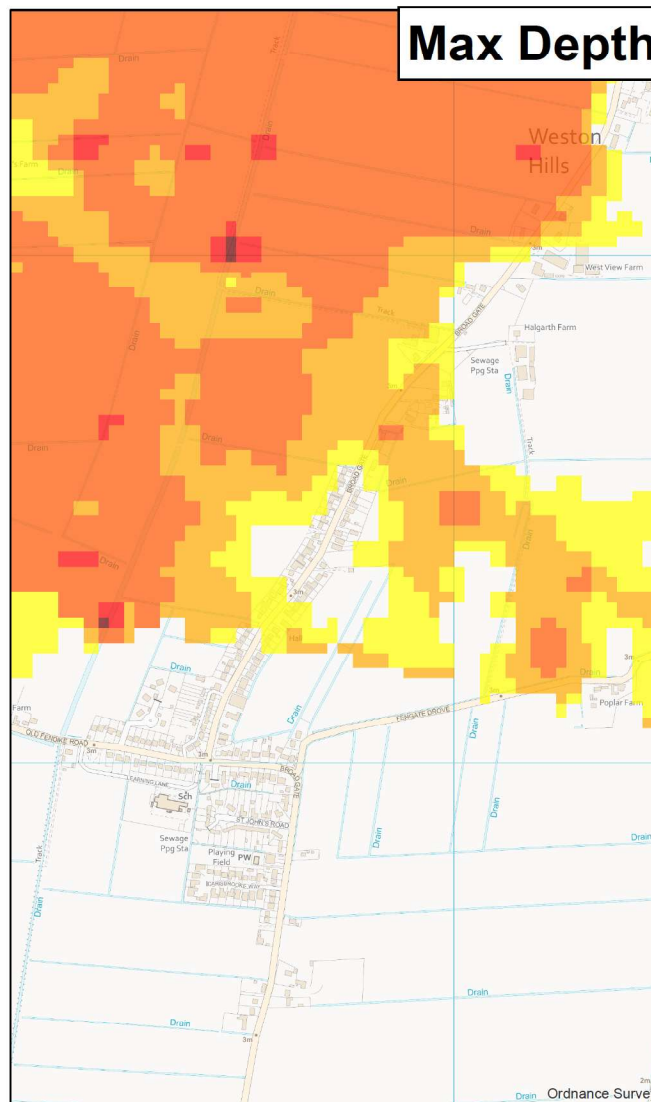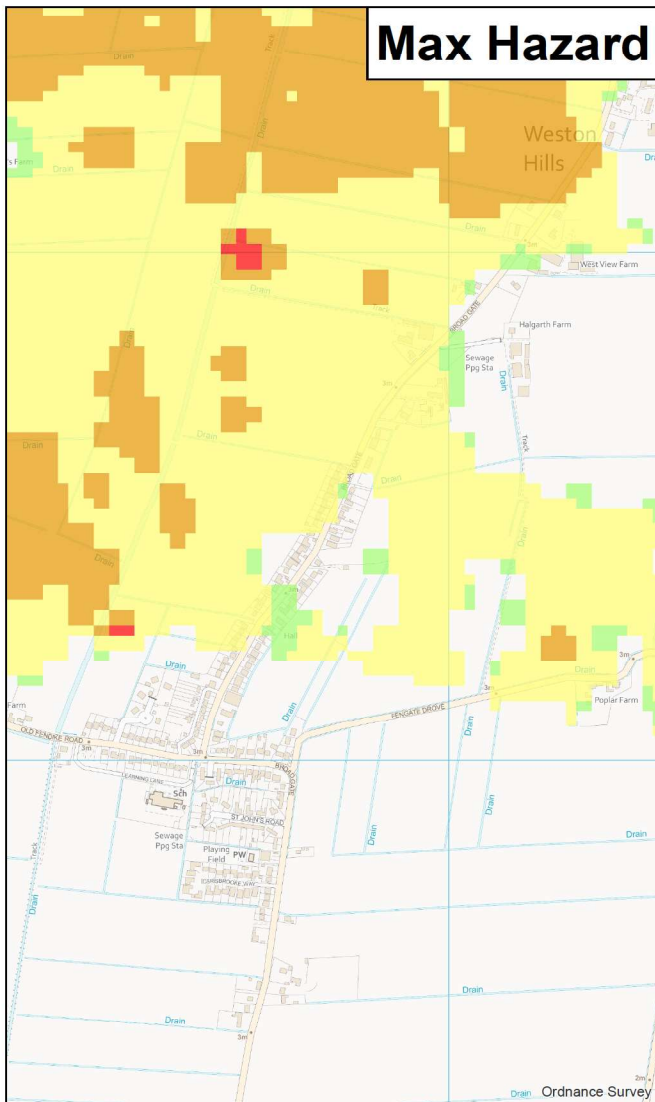

★ Modelled Breach Locations - see also the accompanying plan "Location of Modelled Breaches"							
Max Hazard (Flood Risk to People : FD2320)		Max Depth (m)		Max Velocity (m/s)			
Less than 0.75 (Low Hazard)		0 - 0.25		0 - 0.3			
Between 0.75 and 1.25 (Danger for Some)		0.25 - 0.50		0.3 - 1.0			
Between 1.25 and 2.0 (Danger for Most)		0.50 - 1.0		1.0 - 1.5			
Greater than 2.0 (Danger for All)		1.0 - 1.6		1.5 - 2.5			
		1.6 +		2.5 +			
Date Printed	December 2022	Scenario year	2115	Scenario Annual Chance	0.5% (1 in 200)	CCN Number	CCN-2022-291623

This map shows the level of flood hazard to people (called a hazard rating) if our flood defences are breached at certain locations, for a range of scenarios. The hazard rating depends on the depth and velocity of floodwater, and maximum values of these are also mapped.

The map is based on computer modelling of simulated breaches at specific locations. Each breach has been modelled individually and the results combined to create this map. Multiple breaches, other combinations of breaches, different sized tidal surges or flood flows may all give different results.

The map only considers the consequences of a breach, it does not make any assumption about the likelihood of a breach occurring. The likelihood of a breach occurring will depend on a number of different factors, including the construction and condition of the defences in the area. A breach is less likely where defences are of a good standard, but a risk of breaching remains.




General Enquiries No: 03708 506 506. Weekday Daytime calls cost 5p plus up to 6p per minute from BT Weekend Unlimited. Mobile and other providers' charges may vary



Lincolnshire and Northamptonshire Tidal Breaching Hazard Mapping

Map Centred on TF 27772 20402

This map is reproduced by permission of Ordnance Survey on behalf of The Controller of Her Majesty's Stationary Office. Crown copyright. All rights reserved. Environment Agency 100024198, 2022. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.

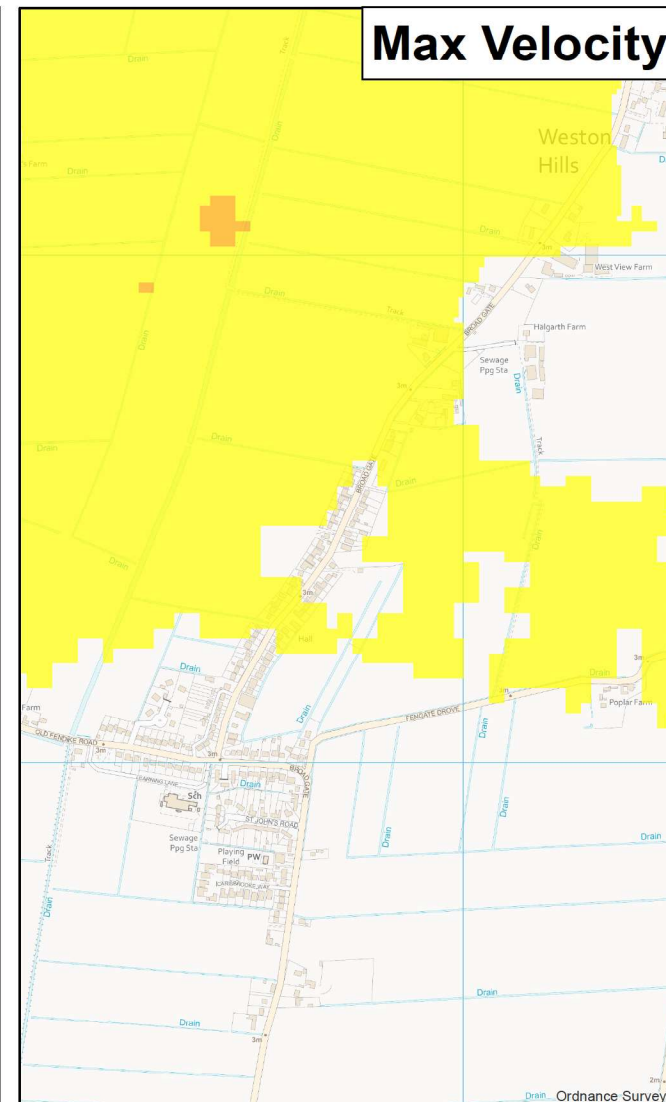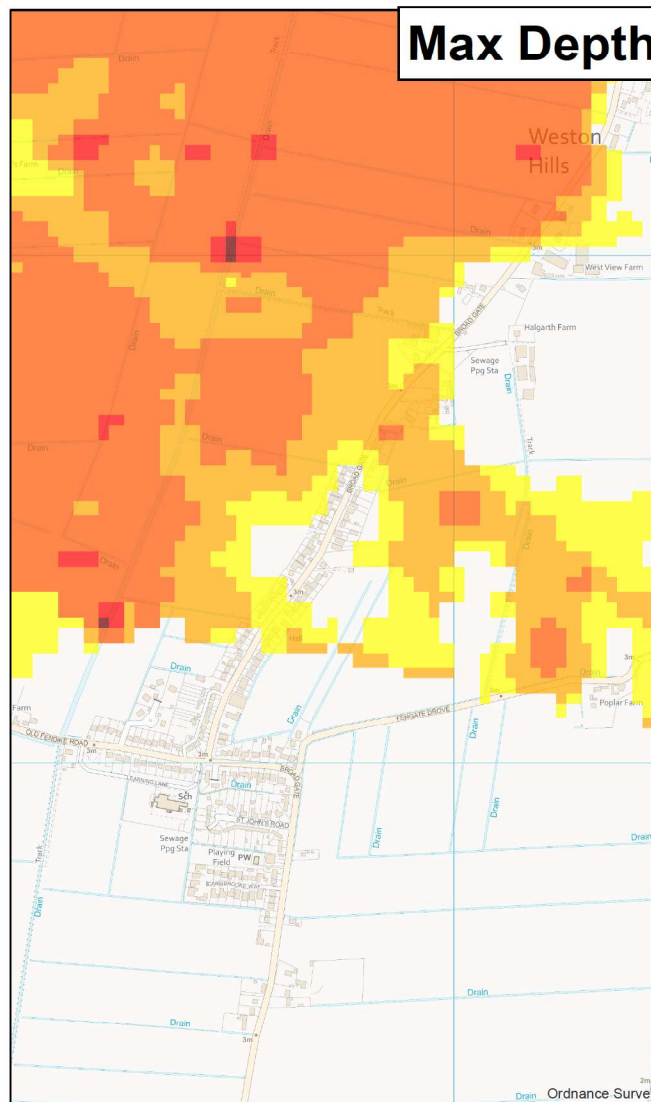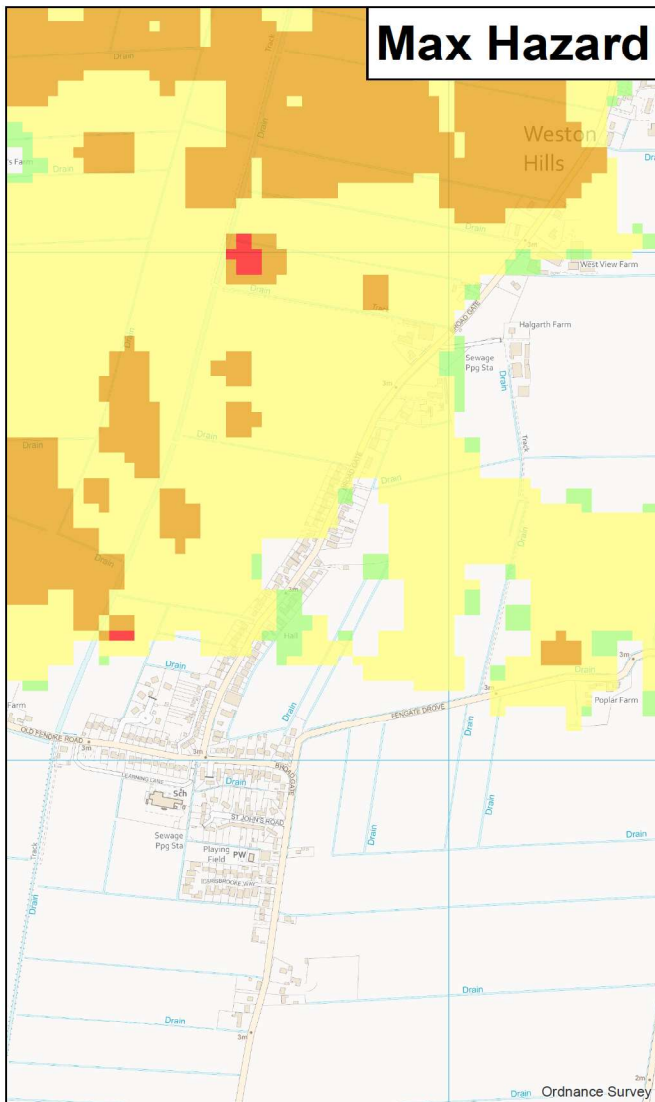

★ Modelled Breach Locations - see also the accompanying plan "Location of Modelled Breaches"							
Max Hazard (Flood Risk to People : FD2320)		Max Depth (m)		Max Velocity (m/s)			
Less than 0.75 (Low Hazard)		0 - 0.25		0 - 0.3			
Between 0.75 and 1.25 (Danger for Some)		0.25 - 0.50		0.3 - 1.0			
Between 1.25 and 2.0 (Danger for Most)		0.50 - 1.0		1.0 - 1.5			
Greater than 2.0 (Danger for All)		1.0 - 1.6		1.5 - 2.5			
		1.6 +		2.5 +			
Date Printed	December 2022	Scenario year	2115	Scenario Annual Chance	0.1% (1 in 1000)	CCN Number	CCN-2022-291623

This map shows the level of flood hazard to people (called a hazard rating) if our flood defences are breached at certain locations, for a range of scenarios. The hazard rating depends on the depth and velocity of floodwater, and maximum values of these are also mapped.

The map is based on computer modelling of simulated breaches at specific locations. Each breach has been modelled individually and the results combined to create this map. Multiple breaches, other combinations of breaches, different sized tidal surges or flood flows may all give different results.

The map only considers the consequences of a breach, it does not make any assumption about the likelihood of a breach occurring. The likelihood of a breach occurring will depend on a number of different factors, including the construction and condition of the defences in the area. A breach is less likely where defences are of a good standard, but a risk of breaching remains.

General Enquiries No: 03708 506 506. Weekday Daytime calls cost 5p plus up to 6p per minute from BT Weekend Unlimited. Mobile and other providers' charges may vary



Lincolnshire and Northamptonshire Tidal Breaching Hazard Mapping

Map Centred on TF 27772 20402

This map is reproduced by permission of Ordnance Survey on behalf of The Controller of Her Majesty's Stationary Office. Crown copyright. All rights reserved. Environment Agency 100024198, 2022. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.