



Wavin Stormwater Management



CONNECT TO BETTER

Wavin Stormwater Management

Project Details			
Project Name	Highgrove Weston	Produced By	- -
Client Name	Highgrove Homes		
Site Address	High Road, Weston, Spalding, PE12 6JU	Date	29/01/2025

Modular Units and Tank Details - Individual Plot (1 or 2)


Unit configuration

The following information provides an approximate calculation and some assumptions. If more accurate information is required, please contact our technical team.

Length	4m	4 units
Width	3m	6 units
Depth	0.8m	2 units
Total Number of Units		48 units

Recommended Unit

Wavin recommend using the following unit for your installation.

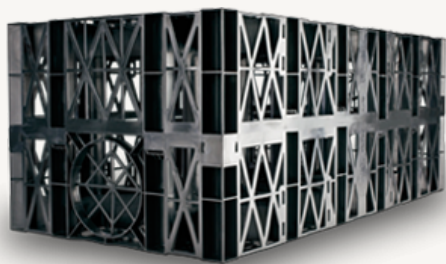

AquaCell Eco

Product Number: 6LB025

AquaCell Eco is manufactured from specially reformulated, recycled material and has been designed for shallow, non-trafficked, landscaped applications.

Other Unit(s)

The following unit(s) can also be used with, or in place of the recommended unit.

Calculations

Site Details

Area	267m ²
Soil Type	Dense sand and gravel
Groundwater Present	No

Traffic Loading (Soakaway size based on 1:30 year Storm)	Non-Trafficked
--	----------------

Area Sales Manager

If you would like to find out how to purchase, please contact your Area Sales Manager

Name	Andrew Nichols
Phone Number	07880 148491

Aquacell Disclaimer

- All information generated by this tool is supplied in good faith and without charge to enable reasonable assessment of the practical performance of Wavin products.
- Wavin offers a program of continuous improvement and reserves the right to modify the specification of products without notice.
- All information in this publication is believed to be correct at time of preparation. However, no responsibility can be accepted for any errors or omissions. Final determination of the suitability of information or material for the use contemplated and the manner of the use is the sole responsibility of the user
- Calculations are based upon relevant industry standards in accordance with the Wallingford Procedure, and should be verified by a qualified engineer.