

LEGEND

- denotes STORM WATER DRAINAGE
- denotes FOUL WATER DRAINAGE
- OS1 denotes STORM WATER MANHOLE
- OF1 denotes FOUL WATER MANHOLE
- og denotes GULLY
- PF1a denotes PRIVATE FOUL INSPECTION CHAMBER
- PLOTS 1-3 PRIVATE FOUL IS INDICATIVE ONLY AND IS TO BE DETERMINED BY OTHERS TO SUIT DEVELOPERS REQUIREMENTS
- PS2a denotes PRIVATE SURFACE WATER INSPECTION CHAMBER
- PLOTS 1&2 PRIVATE SURFACE WATER IS INDICATIVE ONLY AND IS TO BE DETERMINED BY OTHERS TO SUIT DEVELOPERS REQUIREMENTS
- PC denotes PRAM/INVALID CROSSING
- 20.200 denotes SUGGESTED FINISHED FLOOR LEVEL

ROAD LIGHTING KEY:



6m TYPE 3MIO COLUMN WITH POST TOP MOUNTED LANTERN TO APP 14/2 (WRTL 55w FLUORESCENT OR EQUIVALENT) DIRECTLY FED.

5m TYPE 3MIO COLUMN WITH POST TOP MOUNTED LANTERN TO APP 14/2 (PHILIPS F65223/24w OR EQUIVALENT) DIRECTLY FED.

PROVISIONAL 100mm HDPE BLACK DUCT TO ACCOMMODATE P.E.S. SUPPLIES.

N.B. THE ELECTRICAL CONTRACTOR IS MADE AWARE OF THE S.H.W. APPENDICES AND OTHER CORRESPONDENCE RELATED TO THIS DEVELOPMENT

STREET LIGHTING DESIGN		DESIGNER: L.D. ROSSON
DATE: 19/03/05		DATE: 19/03/05

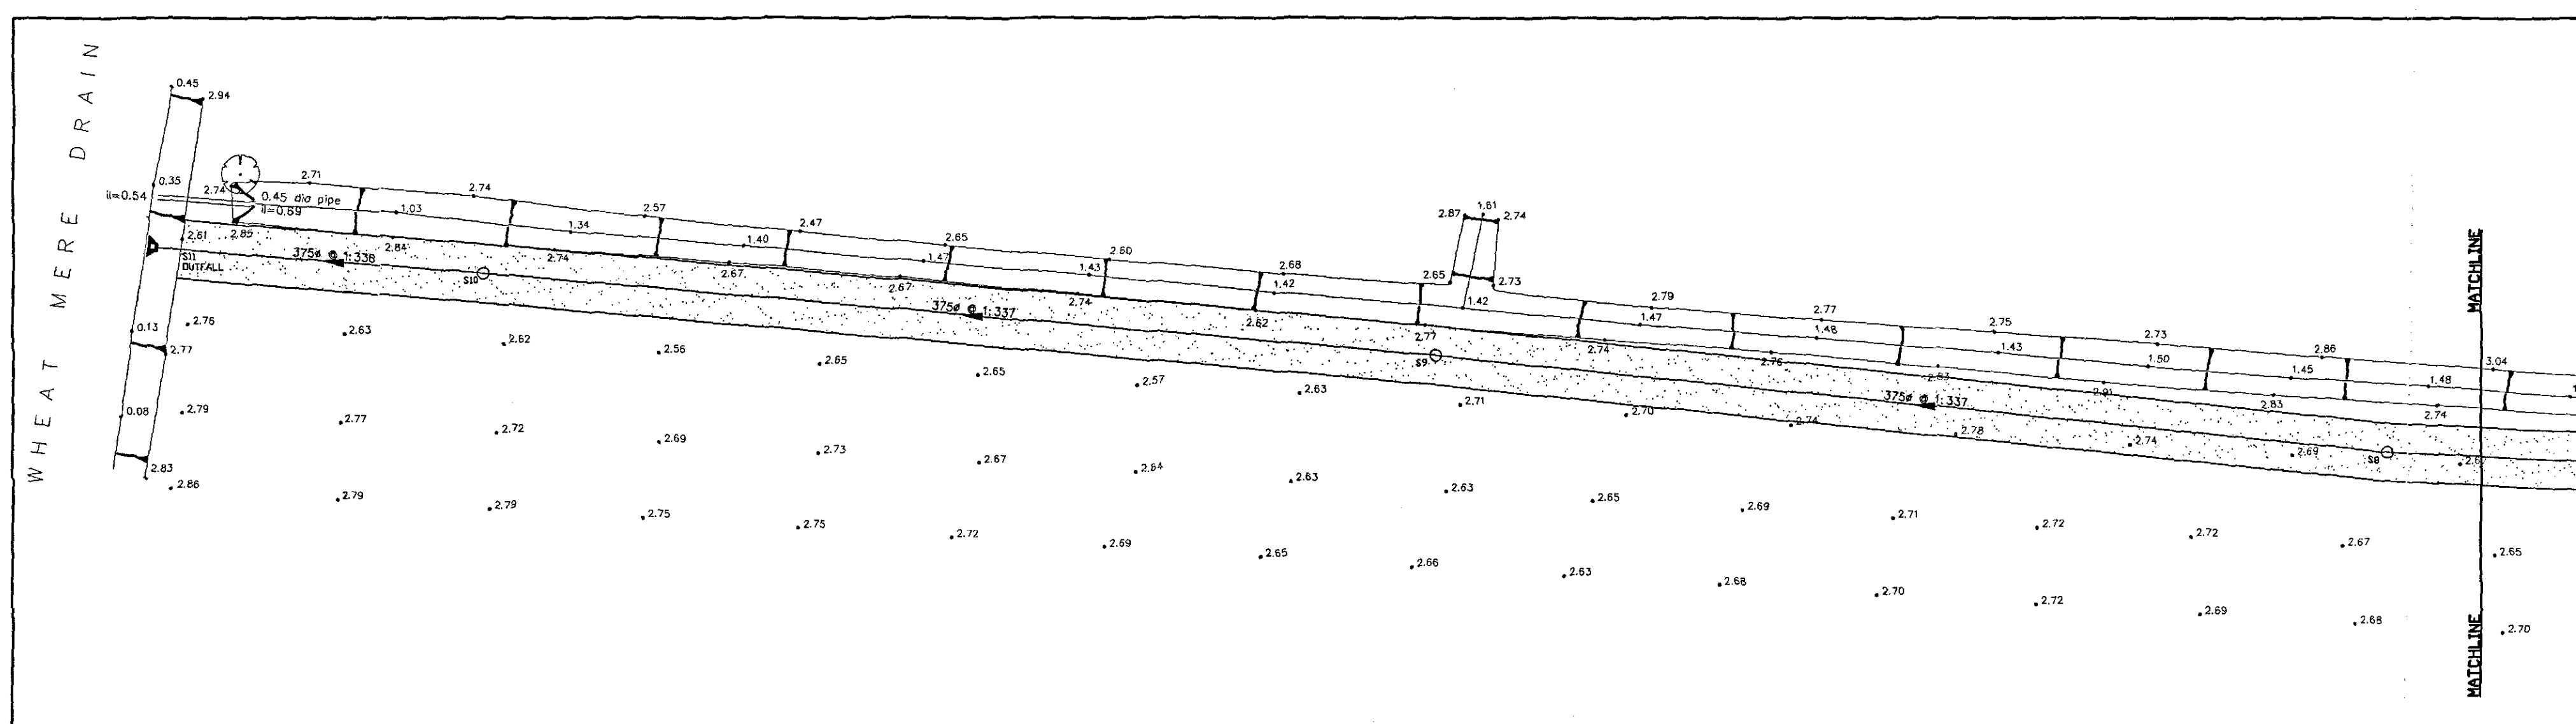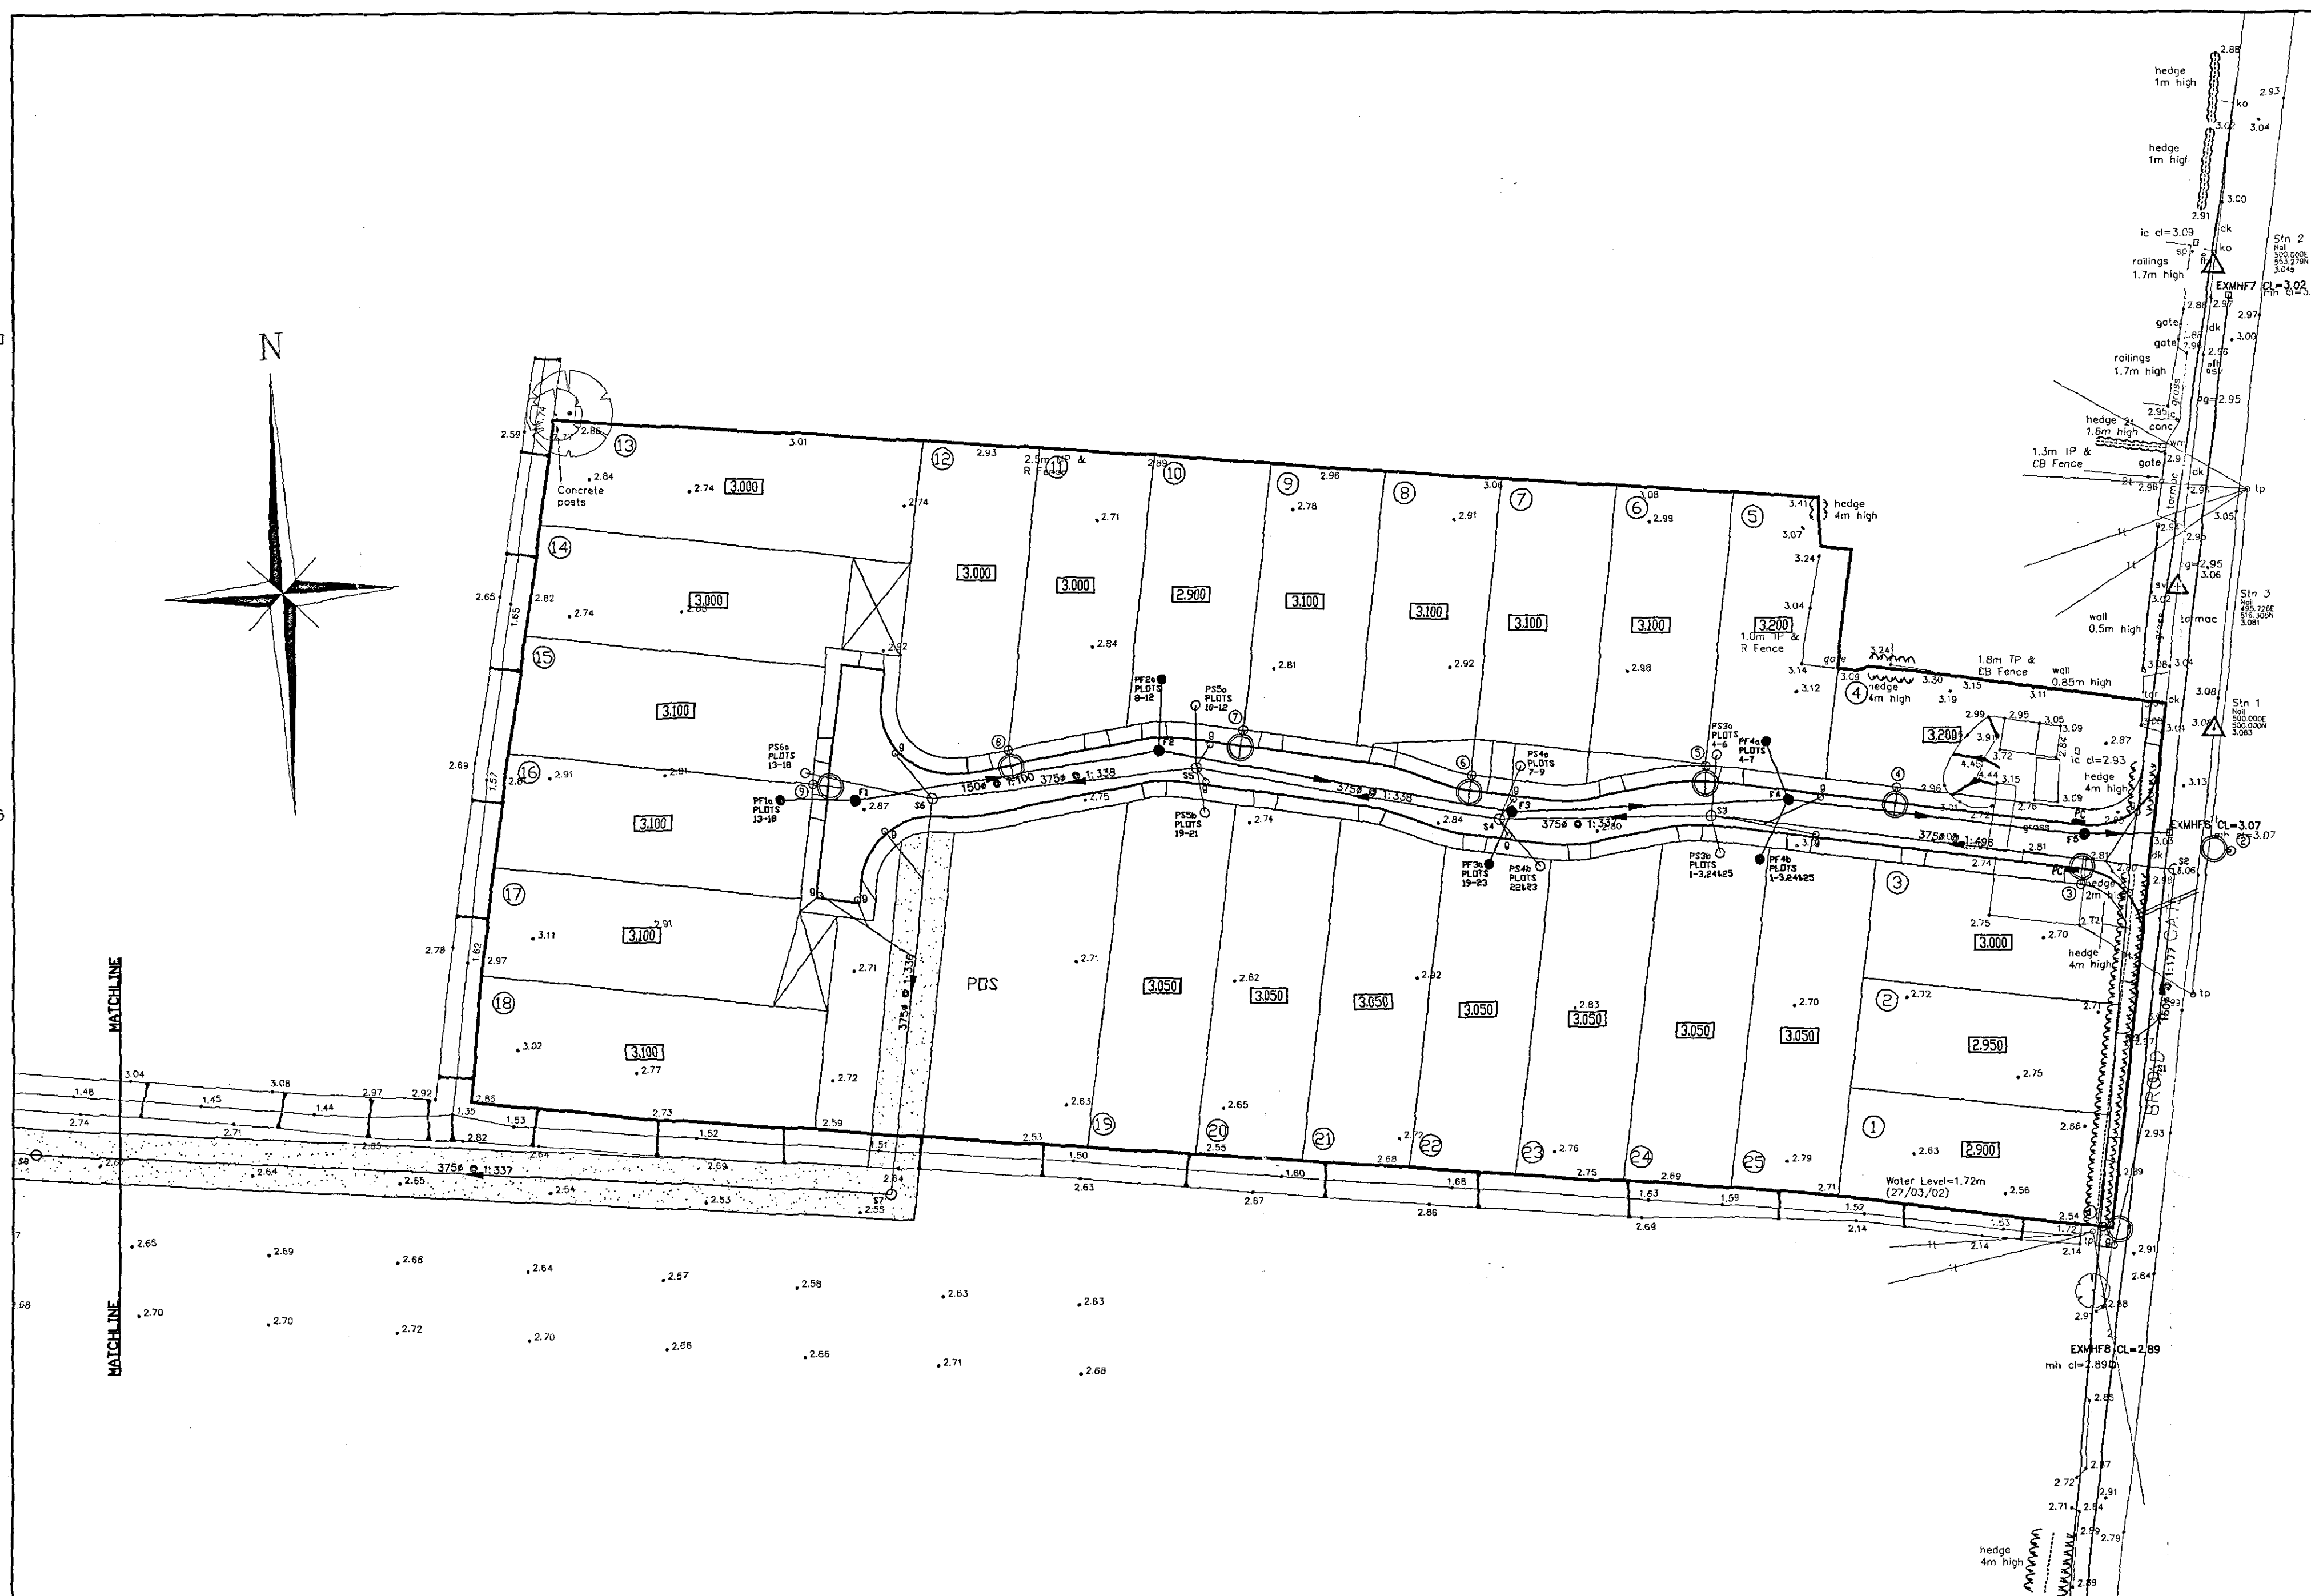

(C)2003 WALDECK ASSOCIATES LTD.

NOTES

1. DO NOT SCALE THIS DRAWING.
2. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS STATED OTHERWISE.
3. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT DRAWINGS.
4. ALL PROPRIETARY ITEMS ARE TO BE INSTALLED IN STRICT COMPLIANCE WITH THE MANUFACTURE INSTRUCTIONS AND RECOMMENDATIONS.
5. PROVIDE CONCRETE SURROUND TO ALL PIPEWORK, WHERE 1.2m OF COVER TO TOP OF PIPE BARREL IS NOT ACHIEVABLE.
6. BRANCH AND ANCILLARY CONNECTIONS TO BE 150mm DIA LAID AT GRADIENTS BETWEEN 1:10 AND 1:80.
7. JULLY CONNECTIONS TO BE 150mm DIA. LAID AT GRADIENTS OF AT LEAST 1:150 UNLESS OTHERWISE STATED.
8. ALL PIPEWORK TO BE LAID WITH LEVEL SOFFITS UNLESS OTHERWISE STATED.
9. ALL FOUL PIPES TO BE 150Ø AT A GRADIENT OF 1:150 UNLESS OTHERWISE STATED.
10. NO WORKS SHALL COMMENCE ON SITE UNTIL APPROVAL HAS BEEN OBTAINED FROM LCC, AWS AND ALL OTHER RELEVANT AGENCIES/AUTHORITIES.
11. ANY SIGNAGE AND LINE MARKINGS ARE TO BE PROVIDED AT THE DISCRETION OF THE AREA HIGHWAYS MANAGER. ALL SIGNAGE AND LINE MARKINGS MUST CONFORM TO 'THE TRAFFIC SIGNS REGULATIONS AND GENERAL DIRECTIONS 1994'.
12. THE SPECIFICATION IN ALL RESPECTS SHALL BE IN ACCORDANCE WITH THE CURRENT 'LINCOLNSHIRE DESIGN GUIDE FOR RESIDENTIAL AREAS' AND 'DEVELOPMENT ROAD SPECIFICATION AND CONSTRUCTION' PUBLICATIONS IN FORCE ON THE COUNTY AT THE TIME OF CONSTRUCTION.
13. PRAM/INVALID CROSSINGS WITH TACTILE PAVING ARE TO BE PROVIDED AT ALL ROAD JUNCTIONS WHERE A FOOTWAY IS PROVIDED. SUCH FACILITIES SHALL BE IN ACCORDANCE WITH CURRENT DEPARTMENT OF TRANSPORT GUIDELINES.
14. ALL SEWERS ARE TO BE CONSTRUCTED IN ACCORDANCE WITH THE PROCEDURES AND SPECIFICATIONS CONTAINED IN 'SEWERS FOR ADOPTION' (5th Edition - July 2001).
15. SURVEY INFORMATION BASED UPON SURVEYLINE DRAWING No. SL1433/16.

B	FINISHED FLOOR LEVELS ADDED AS PER CB DESIGN FAX (19/08/03)	SO	AUG 03
A	STREETLIGHTING ADDED	SO	AUG 03
Rev.	Amendments	Rev'd By	Date

Client
CB DESIGN GROUP

Project
PROPOSED DEVELOPMENT, BROADGATE, WESTON HILLS, SPALDING

Title
PROPOSED DEVELOPMENT OVERLAY

SHDC
Planning & Development
2 MAR 2005
Ref: 0222/05

Job No	33376
Drawing No	33376/A1/03B
Status	PRELIMINARY
Scale	1:250
Date	JUL 03
Project Engineer	PW
Drawn By	SO
Checked By	

Waldeck Associates
Consulting Engineers & Planners
2 Kesteven Road, Spalding, Lincolnshire NG34 7DT
Tel: 01529 415009
Fax: 01529 414644
E-mail: eng@waldeckassociates.co.uk

DETERMINED PLAN