
DETERMINED
PLAN

Anglian Home improvements

SHDC
Planning & Development
23 JUN 2003
Ref 0802/03

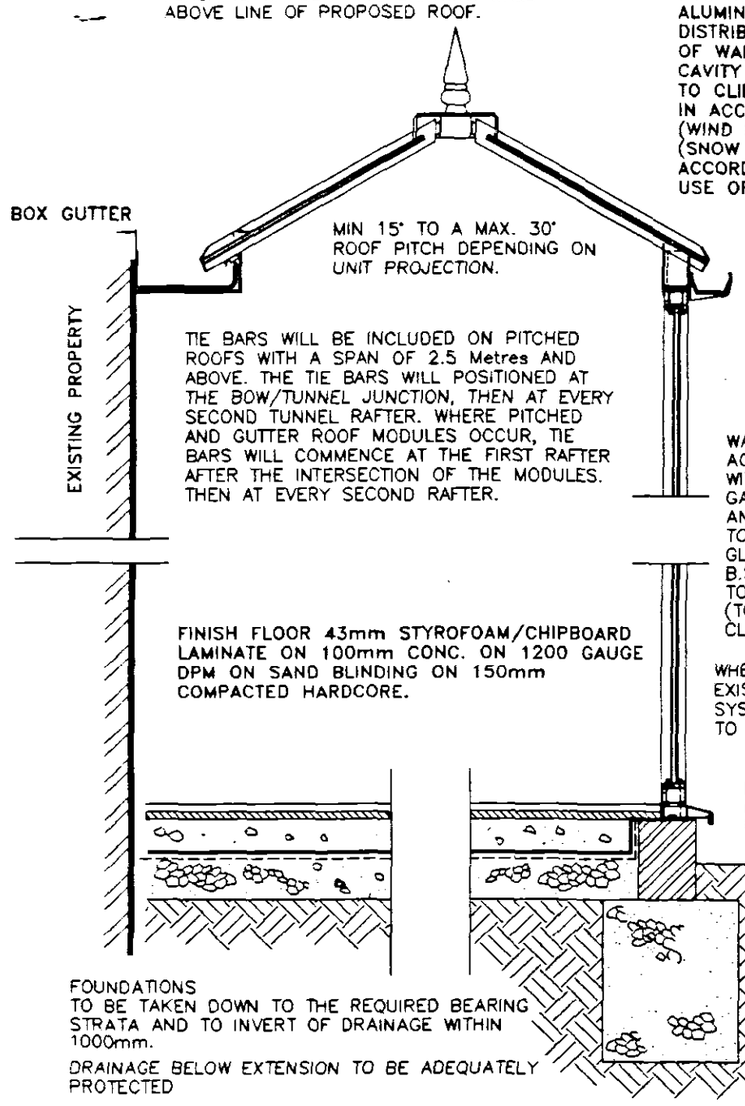

ROOF COMPRISES
STRUCTURAL ALUMINIUM, VENTILATED RIDGE, ALUMINIUM GLAZING BARS WITH PVC INTERNAL AND EXTERNAL CAPPINGS. ALUMINIUM EAVES BEAM (LOAD DISTRIBUTION MEMBER) SECURED TO TOP OF WALL FRAMES. ROOF GLAZING TO MULTI-CAVITY POLYCARBONATE OR GLASS SHEETS TO CLIENTS INSTRUCTIONS. ROOF DESIGNED IN ACCORDANCE WITH CP3 CHAPTER 5 (WIND LOADING) AND BS 6399 PART 3 (SNOW LOADING). ALL DESIGNED IN ACCORDANCE WITH CP118 (STRUCTURAL USE OF ALUMINIUM).

WALLS CONSTRUCTED IN ACRYLIC MODIFIED PVCu WITH STRUCTURAL ALUMINIUM\ GALVANISED STEEL REINFORCED SECTIONS AND GLAZED USING 24mm O/A TOUGHENED GLASS SEALED UNITS GLAZING IN ACCORDANCE WITH B.S.6262. SEALED UNITS CONFORM TO B.S.5713. SAFETY GLASS (TOUGHENED) CONFORMS TO B.S.6206, CLASS A.

WHERE NEW BRICKWORK GABLE ABUTTS EXISTING PROPERTY, FIXING SYSTEMS WILL BE USED IN ACCORDANCE TO BRITISH STANDARDS.

NOTE:- CONSERVATORIES WITH A PITCHED TRANSLUCENT ROOF, UNDER 30m² AREA, ARE NOT SUBJECT TO BUILDING REGULATIONS, PROVIDED IT IS BUILT AT GROUND LEVEL.

TYPICAL SECTION

NOTE:
This cross sectional drawing is shown as a "Typical Example" And is intended for information purposes only. Site Conditions and sub-soil bearing strata will dictate final Design.

DWG: SHT2ED REV: A

PROPOSED . PVCu WHITE KNIGHT CONSERVATORY.

AT . . . . . 212 BROADGATE
WESTON HILLS
SPALDING
LINCOLNSHIRE
PE12 6DQ

TELEPHONE No.'s
HOME: 01406380604
WORK:
MOBILE:

FOR . . . . MR & MRS S READ

CUSTOMER CONTRACT COPY CHECK. YES ✓

SURVEYOR: PLEASE CONFIRM THAT ALL THE ABOVE DETAILS ARE CORRECT. . YES ✓

DATE.	REVISIONS.	BY.
	WHITE KNIGHT UNIT. WITH DUAL KNIGHT CILLS	

DRAWING No. 099/19036	DRAWN BY.. RJB	DATE 29/05/03
BRANCH NAME	SURVEYOR.. JOHN MCCABE	DATE 5/6/03

The Company Surveyor has discussed the above survey with me and I agree to the designs and other details finalised during the Surveyor's visit and I understand that I must settle the account with the Installers upon completion.

Customers Signature ..... Date 5-6-03

Expected Installation Date	Comments on deferred installation
8-12WEEKS	
(Subject to third party approval being obtained)	

Method of payment (Confirmed with Customer) : F&B AND CHEQUE
(Anglian does not accept final balance payment by credit card.)

Code :

APPROVAL REQUIRED ✓ Where applicable					
PLANNING PERMISSION	YES ✓	NO	LOCAL WATER AUTHORITY	YES	NO ✓
BUILDING REGULATION	YES	NO ✓	RESTRICTIVE COVENANTS	YES	NO ✓
LISTED BUILDING CONSENT	YES	NO ✓	HOUSING ASSOC. CONSENT	YES	NO ✓
CONSERVATION AREA	YES	NO ✓	BUILDERS CONSENT	YES	NO ✓
NEIGHBOURS CONSENT	YES	NO ✓	LANDLORDS CONSENT	YES	NO ✓
			PARTY WALL ACT	YES	NO ✓