
STUDIO 11 ARCHITECTURE

Do not scale directly from this drawing. All discrepancies are to be brought to the attention of the below office.

The copyright to this drawing is owned by Studio 11 Architecture.

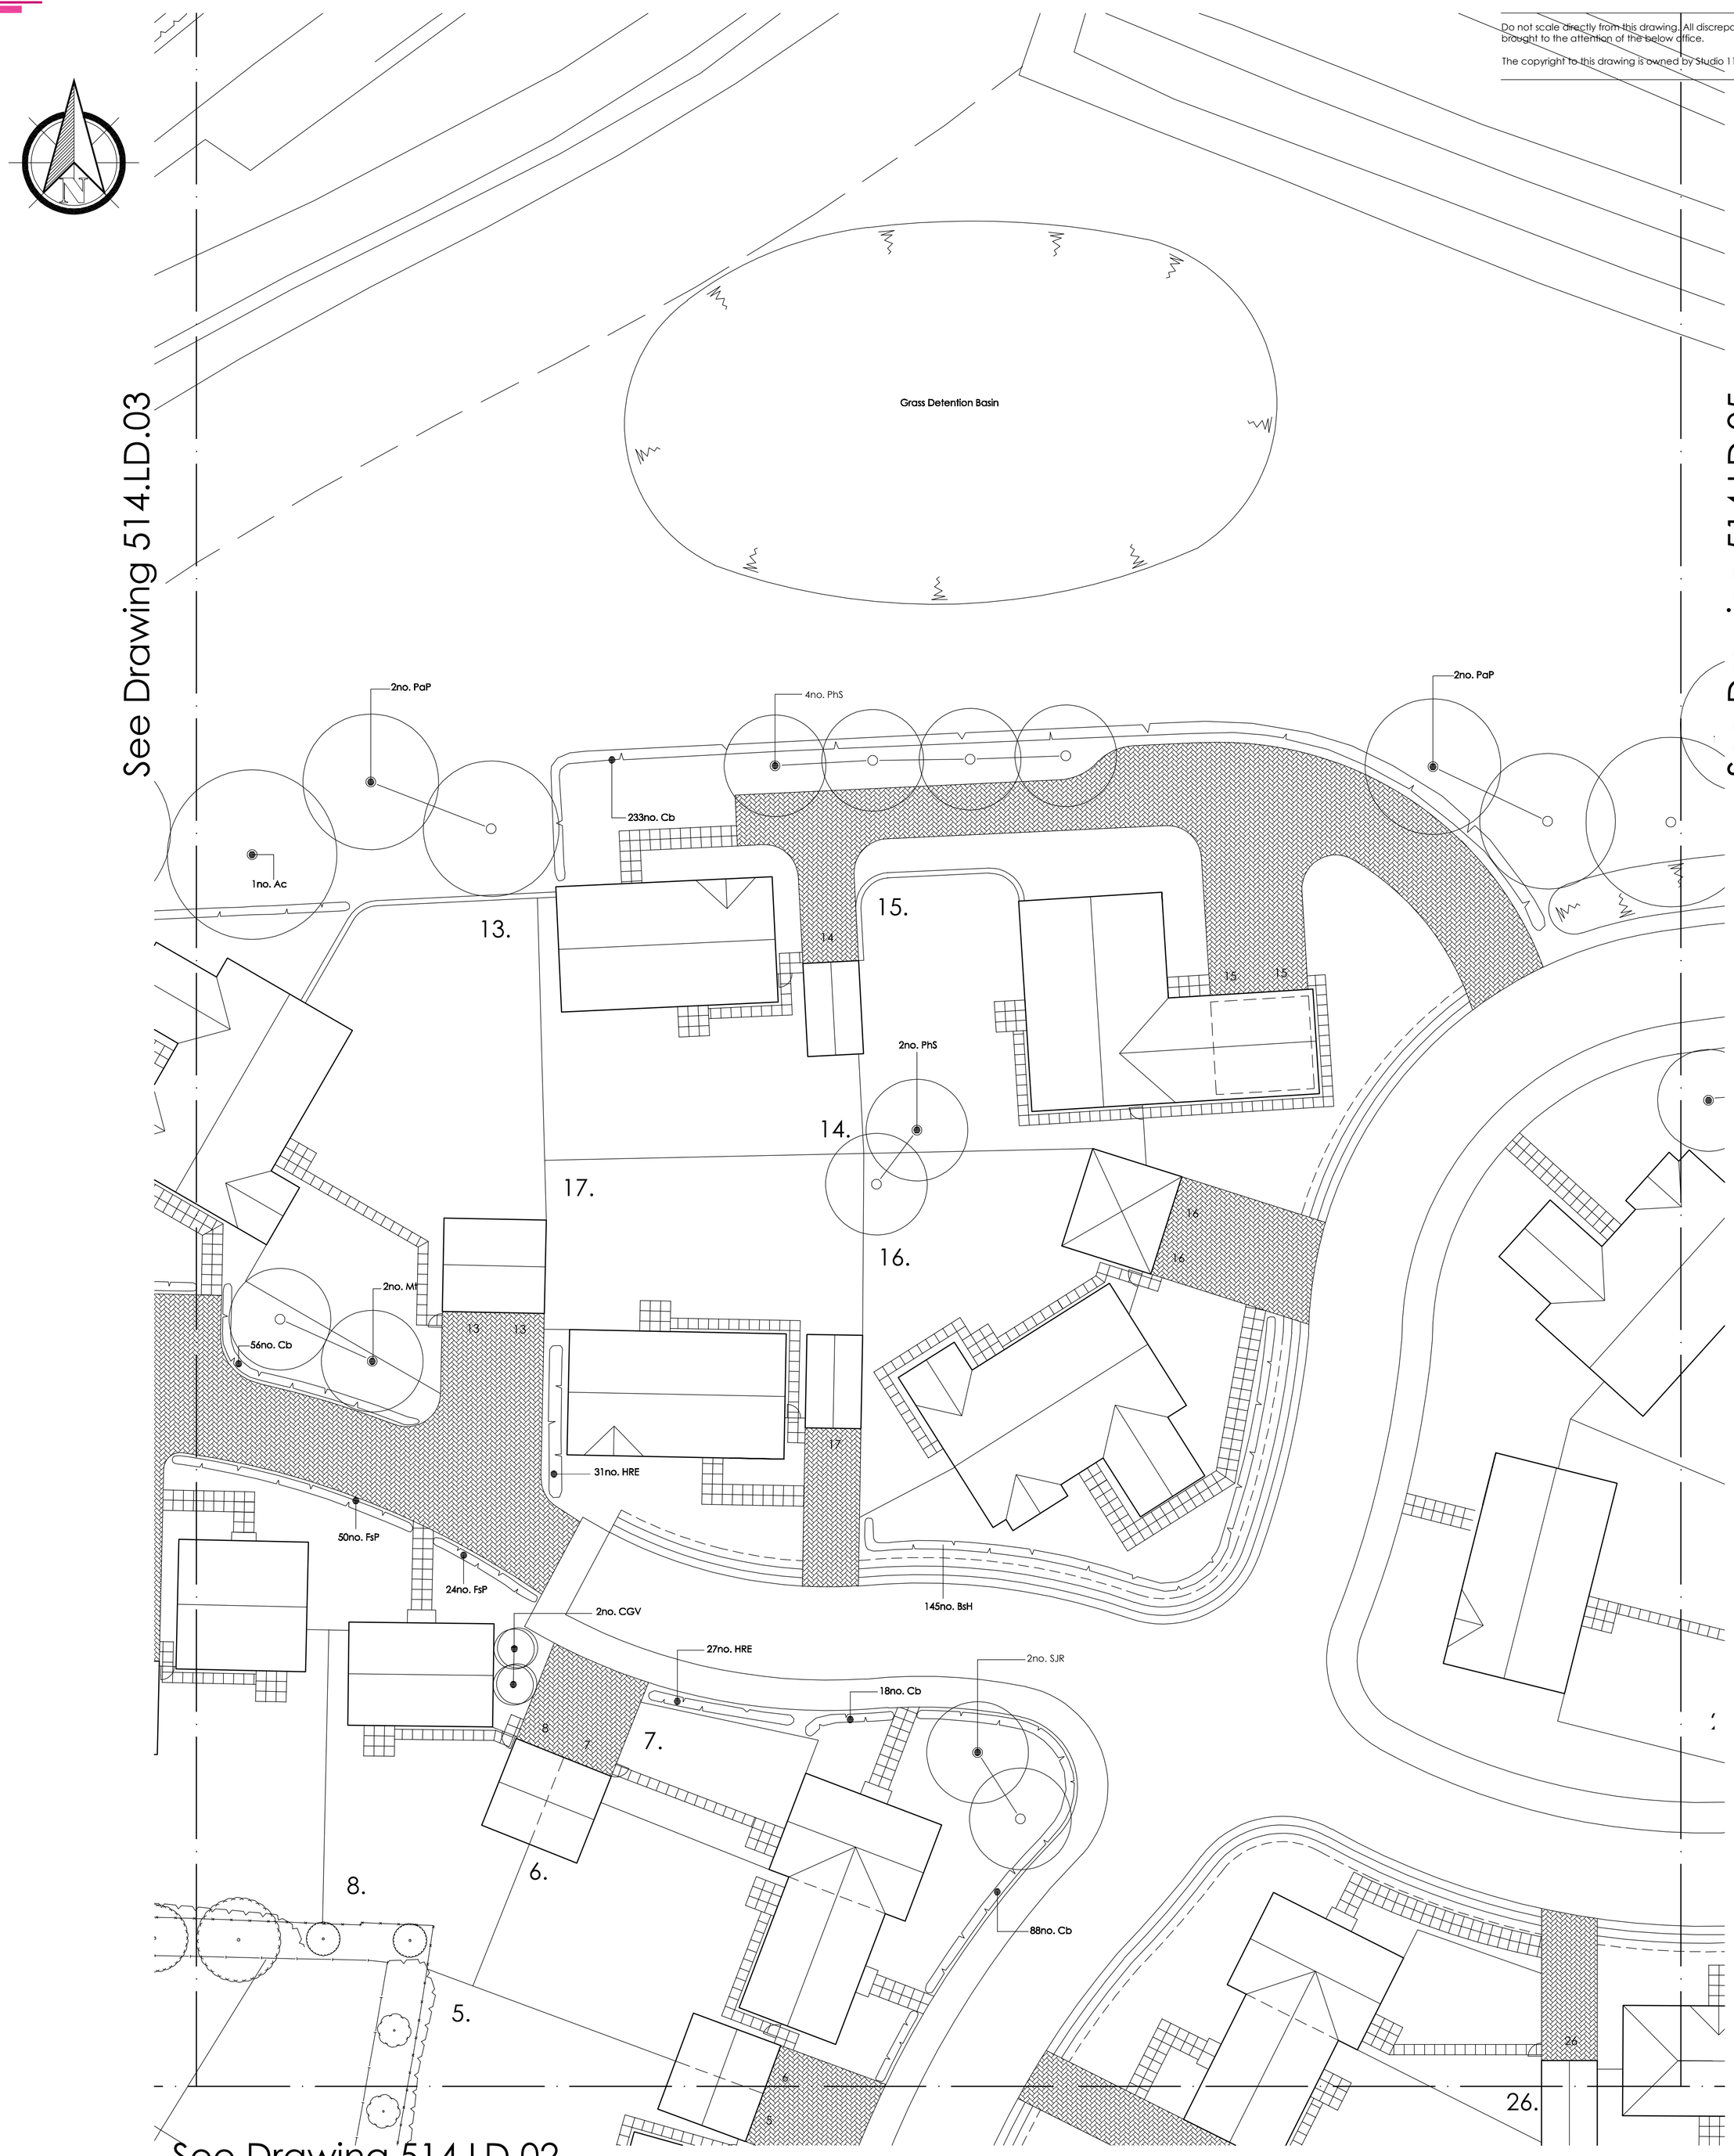

KEY

Existing tree/ landscaping to be retained

Proposed Tree

Proposed hedge

600mm x 600mm buff riven paving slabs to rear

Marshalls Priora charcoal, with parking spaces denoted in nature.

Proposed shrub planting

Specimen Shrub

Marshalls Priora natural, with parking spaces denoted in charcoal

2 x 600mm x 600mm buff riven paving slabs to front

Marshalls Keyblok natural

TREES

	Species	Girth	Type	Overall Height	Root Condition	No.
PhS	Prunus hillieri 'Spire'	12-14	x2	400-500	Bare Root	4
Mt	Malus tschonoskii	12-14	x2	400-500	Bare Root	2
Ac	Alnus cordata	12-14	x2	400-500	Root Balled	2
PaP	Prunus avium 'Plena'	12-14	x2	400-500	Bare Root	4
SJR	Sorbus 'Joseph Rock'	12-14	x2	400-500	Bare Root	2

HEDGE PLANTING

	Species	No. Breaks	Type	Overall Height	Root Condition	Plant Spacing	No.
BsH	Buxus sempervirens 'Handsworthensis'	Multi	3L	15 - 30	Container	300mm c/c	145
Fsp	Fagus sylvatica purpurea	5 - 7	1+1	60 - 90	Bare Root	300mm c/c	74
Cb	Carpinus betulus	5 - 7	1+1	60 - 90	Bare Root	300mm c/c	395

GENERAL PLANTING

	Species	No. Breaks	Type	Overall Height	Root Condition	No.
HRE	Hebe 'Red Edge'	5 - 7	3L	20 - 30	Container	58

SPECIMEN SHURBS

	Species	No. Breaks	Type	Overall Height	Root Condition	No.
CGV	Ceanothus 'Gloire de Versailles'	6 - 8	10 -15L	60 - 90	Container	2

Specification Notes:

1. General Notes

- All planting and seeding to be carried out to BS 3936.

2. Tree Planting

- Excavate tree pits to the following sizes:

  Semi mature trees - 2100 x 2100 x 900mm depth
  Extra heavy standard trees - 1500 x 1500 x 900mm depth
  Heavy standard trees - 1500 x 1500 x 900mm depth
  Standard trees - 900 x 900 x 900mm depth

- Retain topsoil for re-use and remove subsoil from site to designated subsoil heaps.
- Backfill trees with 80 litres of tree planting compost incorporated into topsoil.
- Tree support - Semi-mature, Extra heavy standard and Heavy standard trees to be supported by means of underground guying. Rootballed standard trees to be double staked and bareroot standard trees to be single staked. All trees to be secured to tree stakes with appropriate tree ties and spacers.
- Mulch trees to 75mm depth with 'Bark Nuggets' over area of tree pit.
- Check stakes, ties and spacers regularly to prevent damage to tree trunks and remove when trees are judged to be well established and self supporting.

3. Hedge Planting

- Cultivate 500mm wide strip 300mm deep and plant in a single row unless otherwise stated at the spacings specified in the plant schedule.

4. Groundcover and Shrub Planting

- Cultivate all shrub planting areas to a depth of 300mm and plant shrubs in positions shown.
- Mulch shrub beds with 75mm 'Bark Nuggets'.
- Maintain all planting areas in a weed free condition by appropriate herbicide treatment as necessary until ground is covered by new planting. Hand weed tall weeds as necessary and maintain a tidy appearance.

5. Grass Seeded Areas

- Cultivate to a depth of 150mm and prepare ground in accordance with specification. Sow seed mix Johnsons's 'J4' grass seed mix at a rate of 25g/sq.m.

REVISION DATE DRAWN DESCRIPTION

STUDIO11 architecture

THE BOATHOUSE, HARBOUR SQUARE,
NENE PARADE, WISBECH,
CAMBRIDGESHIRE. PE13 3BH

T: 01945 467339
E: design@studio11architecture.co.uk
W: www.studio11architecture.co.uk

CLIENT RTW Construction & Developments Ltd

PROJECT Proposed residential development at Small Drove/Dean Close, Weston

DRAWING Hard & Soft Landscaping Plan 4 of 6

DRAWN	PROJECT DESIGNER	PROJECT DIRECTOR
KB	KB	KB

DATE	SCALE	PAPER SIZE
06.10.2020	1:200	A1

DRAWING NUMBER 514.LD.04

Working in partnership with **Ralph Charman Associates** & **Eleven Consultants**

ARCHITECTURE