



? Crown Copyright 2008. All rights reserved. Licence number 100020449

LOCATION PLAN 1:2500

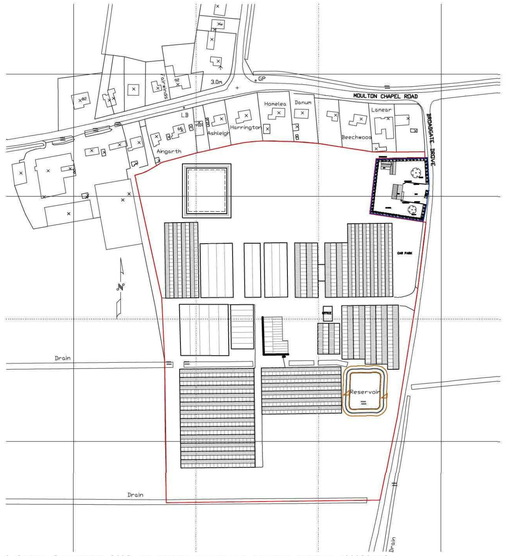



PART SECTION THROUGH BOUNDARY 1:200

Do not scale from this drawing – If in doubt – Ask

LANDSCAPING, FENCING & TREE PLANTING SCHEME.

A – MIXED HEDGE
- (a) Hawthorn (Crataegus Monogyna)
- (b) Beech (Fagus Sylvatica)
- (c) Blackthorn (Prunus Spinosa)
- (d) Buckthorn (Rhamnos Cathartica)

B – SILVER BIRCH – Feathered (Min 4 metres)
C – HAWTHORN – Feathered (Min 4 metres)
D – WHITEBEAM – Feathered (Min 4 metres)

Planting of Hedge to be double row staggered. Distance between plants to be 300 Distance between rows to be 450mm. All as specified by The Woodland Trust.

All planting to be in accordance with BS 4428:1989 and amendment No. 1 (1991) All trees to be planted with minimum 0.6m plastic mulch mat and to be staked, t tubed.

1/3 to ½ bag of peat free tree and shrub planting compost to be incorporated in backfill for each tree hole.

NOTES

LIMITATIONS

This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Building Regulation approval. The drawing must not be used as a contract document alone.

DIMENSIONS

Do not scale from this drawing.

All dimensions are to be checked on site by the builder who shall take responsibility for measurements for construction and ordering purposes from commencement of site works.

Whilst every effort is made to ensure accuracy in dimensioning, measurements should be carefully checked to ensure compatibility with existing structures and features.

SUPERVISION

The works will not be supervised by Albion Technical Solutions or any representative thereof. It is the clients or their appointed agents responsibility to control workmanship, substitution of materials, adherence to specification, variations to contract etc.

STANDARDS

All materials to be new unless otherwise stated and all components and materials etc. to be used, fitted and installed in strict accordance with manufacturers instructions and relevant Code of Practice.

Materials shall conform to the appropriate British Standard Specification or BBA Certificate or European Code equivalent.

Preservative treatment to BS 5268 : Part A is to be carried out to all timber prior to delivery to site.

DETAILS / FOUNDATIONS

All details shown on this drawing including foundations, are based upon typical site conditions including soil of good bearing capacity.

Site soil surveys are recommended in respect of foundations to establish specific site conditions before *foundation work is undertaken.*

If adverse ground conditions are encountered, then the advice of a qualified structural engineer should be sought.

HEALTH AND SAFETY

The Employer / Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health and Safety legislation for Building Sites and Work Places.

The Employer / Client is advised that should the works need to comply with the Construction Design and Management Regulations, and independent Planning Supervisor will be required.

SCOPE OF THE WORKS

The works comprise all that is shown on the drawings and details. Any work that may not be specifically shown, but may reasonably be inferred as necessary to carry out the works will be deemed to be included

Rev	Description	Date
H	3 No BAYS EAVES HEIGHT REDUCEDFEB	2015
G	ADDITIONAL PLANTING ADDED	OCT 2014
F	BAY REMOVED – NORTH ELEVATION SEPT	2014
E	PLANTING SCHEME AMENDED	JULY 2014
D	LANDSCAPING ADDED – PLANNING	JUN 2014
C	ADDITIONAL BIOMASS ADDED	FEB 2014
B	TOP LOADER REDUCED	OCT 2013
A	EXISTING STRUCTURES ADDED	SEPT 2013

Revisions

Albion Technical Solutions
8 Malvern Avenue
Spalding
Lincs
PE11 2DG
Tel: 01775 714449
Fax: 01775 710210
www.albion-technical-solutions.com
Building Design & Planning Consultants

Client
LUCKSBRIDGE HORTICULTURE LTD

Project
PROPOSED GLASSHOUSE REPLACEMENT AND NEW BIOMASS PLANT ROOMS
BROADGATE DROVE
MOULTON CHAPEL
SPALDING
LINCS
PE12 0XU

Drawing
PROPOSED SITE PLAN
LOCATION PLAN
BOUNDARY SECTION

Drawing Status
PRELIMINARY

Scale	Date
1:750	JULY 2010
Project Number	Revision
ATS/120–10	H
Drawing Number	Original Sheet Size
04	A1

© Albion Technical Solutions