



FRONT



SIDE

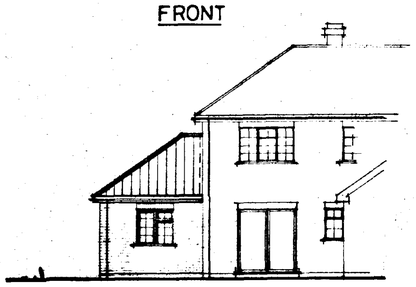


REAR

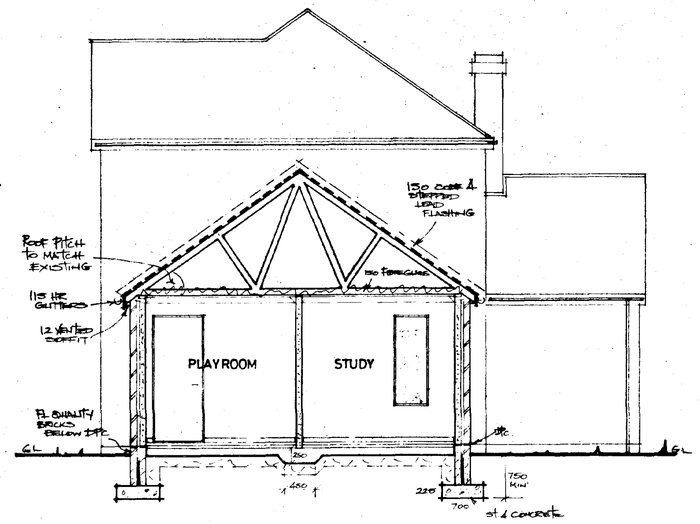


SECTION AA.

ROOF DESIGNED & ERECTED TO BS:5268. PART 3, 1985.


ROOF TRUSS DESIGN & CERTIFICATE TO BE SUPPLIED PRIOR TO ERECTION ON SITE.

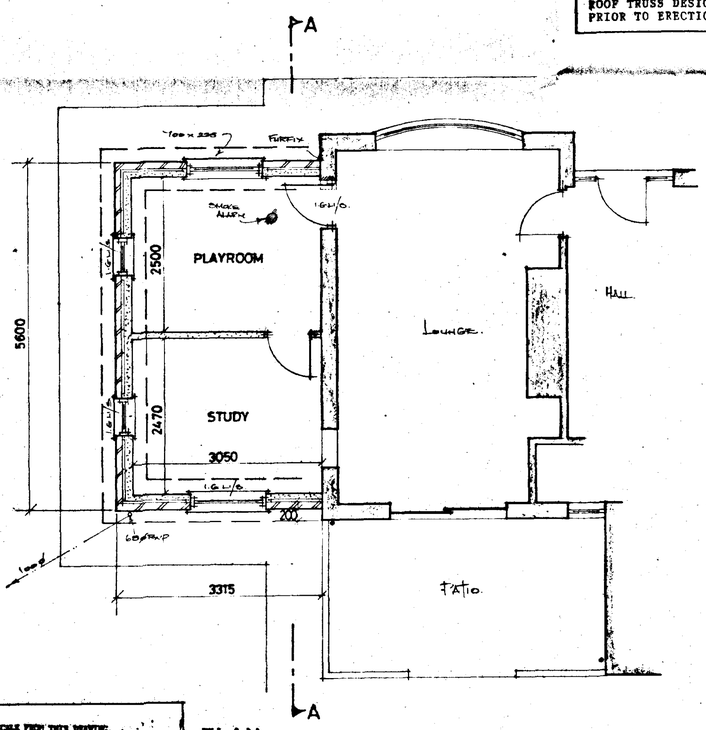


PLAN.

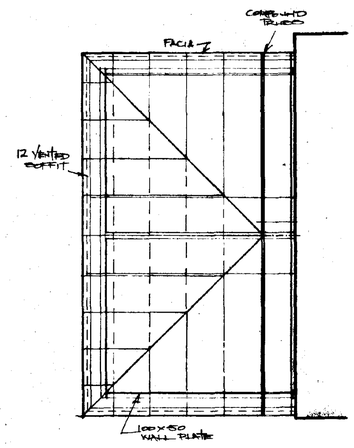

ROOF PLAN.

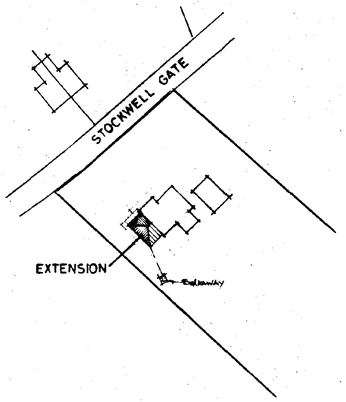

SITE LAYOUT.

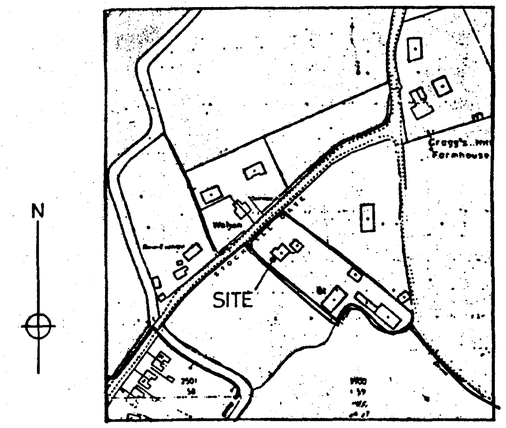

LOCATION PLAN.

SOUTH HOLLAND D.C.
PLAN DEPT
08 FEB 1995
REF. H03/0105/95

DETERMINED PLAN

LINTELS
To be I.G. Ltd/S in cavity wall openings generally, unless stated otherwise. Internal door openings in block walls to be I.G. Box 100 lintels. All lintels to have minimum 150mm end bearing and installed strictly in accordance with the makers instructions.

WINDOWS AND DOORS
Windows and doors to be white uPVC unless other indicated. All windows and doors to be double glazed (sealed unit type). ~~Double doors to be purpose made 54mm thick fielded panel style (overall size 1800mm approx) unless to be openers.~~ All other windows to be fitted with adjustable ventilators in sash or frame head to give minimum 4000 sq mm ventilation.

JOINERY
Doors, frames, linings, skirtings, architraves, window board and timber mouldings etc to be of standard manufacture and be as BOULTON & PAUL or equal approved.

RAINWATER GOODS
PVC gutters 115mm hr and 68mm dia down pipes to match including all bends outlets, clips, brackets, connectors etc and connect to underground drain to soakaway.

SOAKAWAYS
To be minimum 5.0 metres from any building and to be 1 cu. m. rubble filled with inlet pipe discharging to centre of soakaway.

PLASTERWORK
Walls to be plastered cement:lime:sand render with skim finish a total of 13mm thick including reveals and lintel soffits.

SKIRTING AND ARCHITRAVES
Timber mouldings, skirting and architraves to be standard section or as otherwise directed.

SMOKE ALARMS
Provide mains operated self-contained smoke alarm that conforms to BS:5446, Part 1. Provide at least one on each floor depending on layout and size in accordance approved document, Part 1. More than one smoke alarm should be inter-connected. Also read in conjunction with approved manufacturers instructions. (see position on drawing)

GROUND FLOOR
65mm mortar screed reinforced with chicken wire on 500 gauge polythene separating layer on 25mm Jablite (or similar)
-polystyrene insulation on 100mm thick C20P concrete sub-floor on 1200 gauge DPM lapped with DPC in walls. 150mm min hardcore, blinded and compacted. Excavate overwide to 100mm deep to remove topsoil of vegetation.

ROOF CONSTRUCTION
Roofs to be constructed in accordance with and to the sizes shown on the drawings. All timbers to be G.S. grade softwood properly seasoned and to an acceptable moisture content for carcassing timber where traditional roof. Where trussed rafters adopted they shall be of an approved manufacturer and designed, assembled, erected and braced in accordance with B.S. 5268, Part 3, 1985.

ROOF COVERINGS
Concrete interlocking tiles, to be fixed in accordance with the manufacturer's instructions and BS 5534 Pt 1 1978. Battens 38 x 25 at gauge centres on untearable Type 1F sarking felt with minimum 150mm laps.

STRAPPING
Provide and fix 30mm x 5mm patent galvanised mild steel straps at 1.8 metre centres to anchor wallplate to blockwork walling.

INSULATION
Lay 150mm FIBREGLASS between joists and maintain minimum 50mm gap between top of insulation and sarking felt where insulation runs up to roof slope.

ROOF VENTILATION
6mm plywood with 12mm continuous gap as soffit board. Provide fine mesh flyproof screen to ventilation gap.

FASCIAS
To be wrot ex 25mm nominal thickness painted softwood with rebate for soffit. Frame out in 38 x 25 S/W for soffit support.

CEILINGS
Provide and fix 12.7mm GYPROC Wallboard to all new ceilings. Nog all perimeters and board joints prior to fixing plasterboard to fully support sheeting. Fix GYPROC coving and ARTEX finish to ceiling.

LATERAL RESTRAINT
Provide patent 30mm x 5mm galvanised mild steel BATSTRAPS or similar at 1.8m centres at first floor level, ceiling joist and rafter levels where they run parallel to the walls. Solid strut below the straps and tight pack against the walls.

WALLS
Cavity work to be 265mm overall width comprising 100mm clay facing bricks, 65mm cavity filled with CROWN DRITHERM fibreglass insulation batts, 100mm load bearing "Thermalite" insulation blocks. Internal partitions to be in 100mm blockwork walling. Wall ties in cavity walling to be stout galvanised wire butterfly type at 900mm centres horizontally and 450mm centres vertically every alternate tie course to be staggered 450mm. At openings provide ties at 225mm centres vertically within 225mm of the openings.

SUB STRUCTURE WALLS
To be in TYPE A dense aggregate concrete blockwork up to ground level. Cavity to be filled with lean mix concrete.

DAMP PROOF COURSES
Provide embossed heavy duty polythene dpc material at 150mm minimum above ground level in all leafs of cavity walling, piers and columns. Dpcs to be linked with dpm. Also provide vertical and horizontal dpcs around openings for windows and doors in cavity walls and similar material as cavity trays over lintels.

FOUNDATIONS
Generally to be in mass concrete C20P strip 700mm wide x 225mm thick under cavity walling, 450mm x 225mm under partition walls. Thicken floor slab to 250 x 450 wide below non-loadbearing partition walls. Excavations shall be down to a firm, consistent, loadbearing stratum to the approval of the Local Authority Building Control Officer.

G. R. MERCHANT
I.ENG AMICE, FIWO,
ARCHITECTURAL, STRUCTURAL
& LAND DRAINAGE CONSULTANT
TEL: HOLBEACH (01406) 490800

PROJECT:
STUDY & PLAYROOM EXTENSION.

CLIENT:
A.G. SEYMOUR.
BOTTOM END.
STOCKWELL GATE.
WHAPLODE.

SCALES:	DATE:
1/50. 1/100.	JAN 1995.
G.R.Merchant.	DRAWING No.: AGS.1

REVISIONS:

DO NOT SCALE FROM THIS DRAWING.

This drawing is copyright and may not be altered, traced, photographed or used for any purpose other than that for which it is issued.

The General Contractor is to check all dimensions on site and report discrepancies to the Architect.

All details shown on this drawing including foundations are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions which may be discovered during construction unless reported to the Architect so that design amendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken.

SUMMIT