
General Notes:

1. Do not scale from the drawings, alter dimensions, components & assemblies on site prior to manufacture, construction, or supply.
2. Where no units are given for dimensions, whole numbers indicate millimetres (mm) & decimal numbers indicate metres (m).
3. All drawings are to be read together in conjunction with all relevant Architects and other Engineers drawings and specifications. Any discrepancies are to be reported to WE Consulting Engineers for review before ordering materials, commencing fabrication, or proceeding on site.
4. All materials, construction and details shown or implied on this drawing must comply with current Eurocode or British Standard Codes of Practice, Planning / Building Regulations, H&SE legislation and client's particular specifications.
5. All proprietary items and materials are to be used and installed in accordance with manufactures specifications and recommendations.

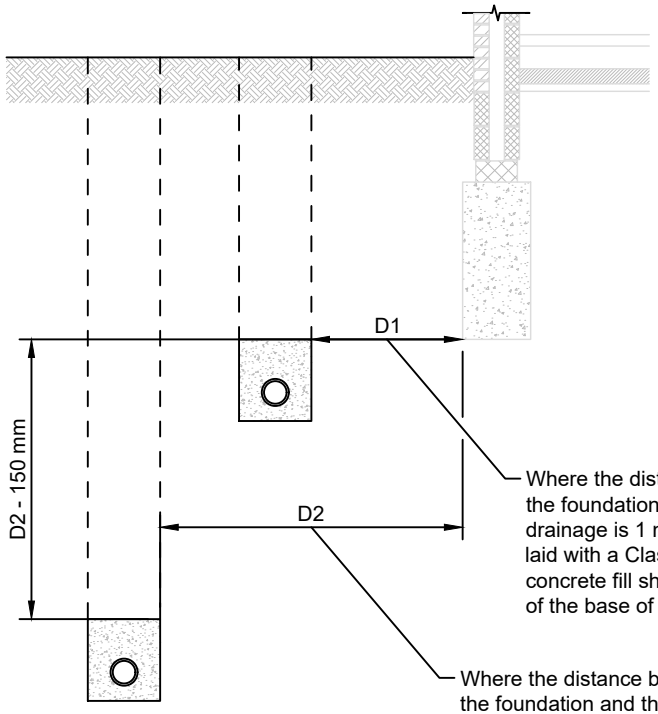

Where the distance between the edge of the foundation and the trench for the drainage is 1 m or less the pipe should be laid with a Class Z surround and the concrete fill should extend up to the level of the base of the foundations.

Where the distance between the edge of the foundation and the trench for the drainage is more than 1 m the pipe should be laid with a Class Z surround and the concrete fill should extend to a level below the base of the foundation equal to 150 mm less than the distance from the foundation.

TRENCH FILL NEAR BUILDINGS

Strip, pad and raft foundations

As shown on layout:



NOT FOR CONSTRUCTION

REV.	DESCRIPTION	DATE
P01	For Comment	05/24

DRAWING TITLE: Drainage Detail D04

SCALE	NTS @ A4	DATE	05/24
DRAWING No.	WECE-A4-C-113	REV.	P01
STATUS	Preliminary		
DRAWN	ST	CHECKED	ST

WE. CONSULTING ENGINEERS

WE Consulting Engineers Limited
Black Barn,
Fen Road,
Guyhirn,
PE13 4AA

t: 01945 479 689
e: mail@we-engineer.co.uk

© WE Consulting Engineers