

SIDE.

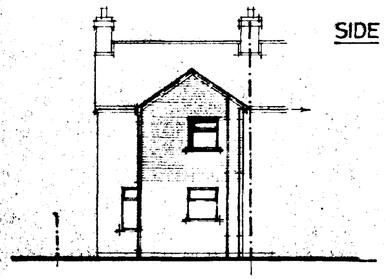

REAR.

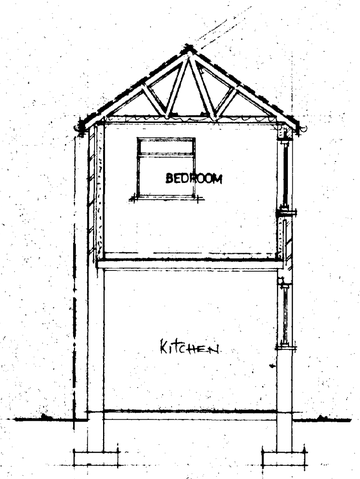

SECTION AA.

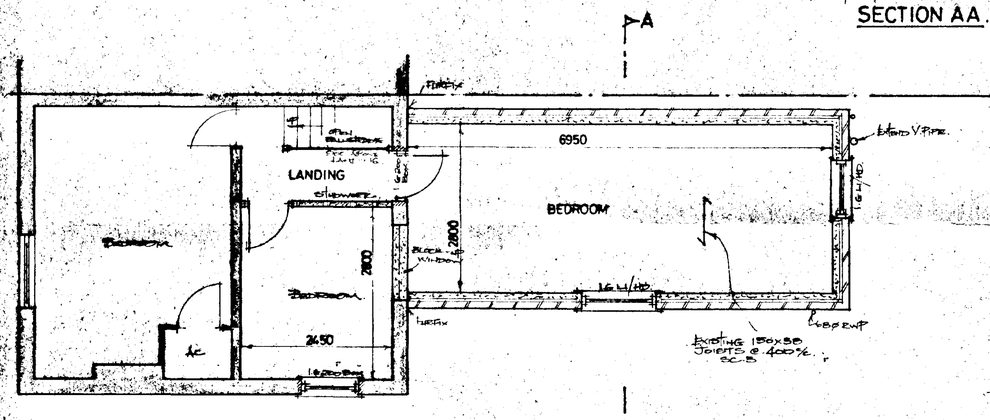

FIRST FLOOR PLAN.

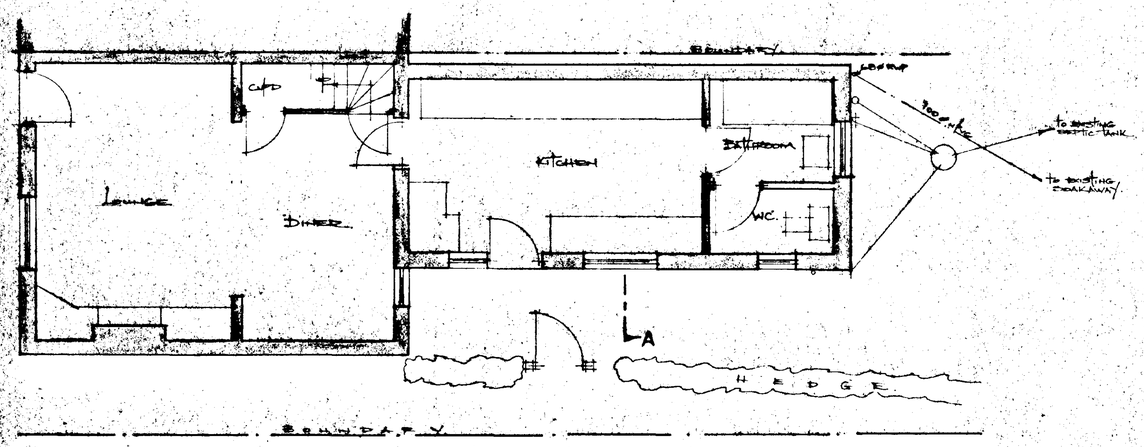

GROUND FLOOR PLAN.

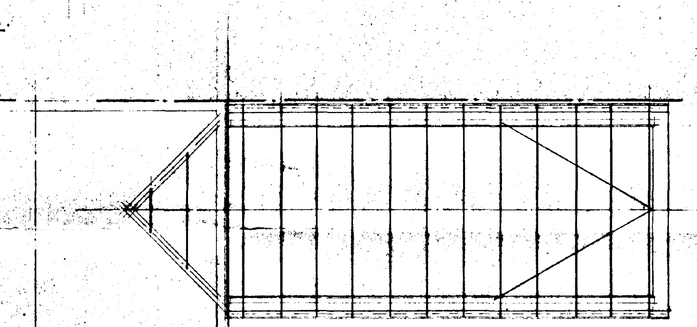

ROOF PLAN.

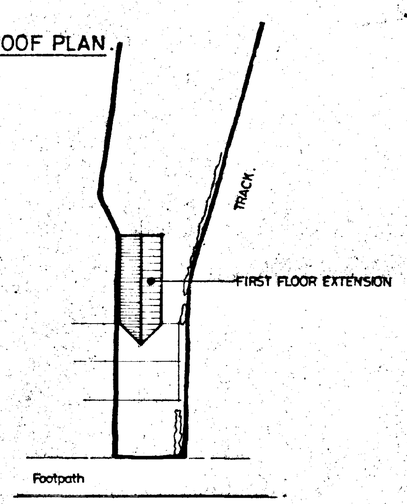

SITE PLAN.
SCALE: 1/250.

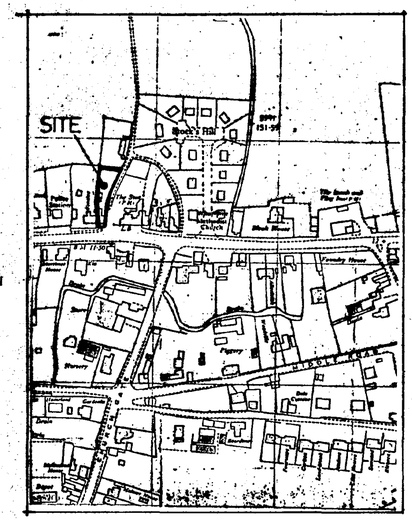

LOCATION PLAN.
SCALE: 1/2500.

PLASTERWORK
Walls to be plastered cement:lime:sand render with skim finish a total of 13mm thick including reveals and lintel soffits.

SKIRTING AND ARCHITRAVES
Timber mouldings, skirting and architraves to be standard section or as otherwise directed.

LINTELS
To be I.G. L1/S in cavity wall openings generally, unless stated otherwise. Internal door openings in block walls to be I.G. Box 100 lintels. All lintels to have minimum 150mm end bearing and installed strictly in accordance with the makers instructions.

VENTILATION
Natural ventilation area of windows to be not less than 1/20 of room floor area. All windows to have 4000 sq mm squared night vents.

JOINERY
Doors, frames, linings, skirtings, architraves, window board and timber mouldings etc to be of standard manufacture and be as BOULTON & PAUL or equal approved.

UNDERGOUND DRAINAGE
110mm UPVC pipe to fall 1:70 with 100mm peagravel bed and surround. Inspection chambers to be 450mm dia preformed plastics installed to manufacturer's instructions complete with cover and frame. Drain runs with less than 300mm ground cover to have paving slab protection over trench on top of peagravel surround on haunched back trench. Omit where concrete path cast over pipe runs.

RAINWATER GOODS
PVC gutters 115mm hr and 68mm dia down pipes to match including all bends outlets, clips, brackets, connectors etc and connect to underground drain to soakaway.

SOAKAWAYS
To be minimum 5.0 metres from any building and to be 1 cu. m. rubble filled with inlet pipe discharging to centre of soakaway.

ROOF CONSTRUCTION
Roofs to be constructed in accordance with and to the sizes shown on the drawings. All timbers to be G.S. grade softwood properly seasoned and to an acceptable moisture content for carcassing timber where traditional roof. Where trussed rafters adopted they shall be of an approved manufacturer and designed, assembled, erected and braced in accordance with B.S. 5268, Part 3, 1985.

ROOF COVERINGS
Concrete interlocking tiles, to be fixed in accordance with the manufacturer's instructions and BS 5534 Pt 1 1978. Battens 38 x 25 at gauge centres on untearable Type 1F sarking felt with minimum 150mm laps.

STRAPPING
Provide and fix 30mm x 5mm patent galvanised mild steel straps at 1.8 metre centres to anchor wallplate to blockwork walling.

FIRST FLOOR CONSTRUCTION
Provide and fix 19mm tongued and grooved flooring grade wood particle board on G.S. grade softwood floor joists to the sizes indicated on the drawing. Provide solid strutting at mid span of joists. Build joists into walls to full bearing width of wall, but ensure not to encroach into the cavity.

INSULATION
Lay 150mm FIBREGLASS between joists and maintain minimum 50mm gap between top of insulation and sarking felt where insulation runs up to roof slope.

ROOF VENTILATION
6mm plywood with 12mm continuous gap as soffit board. Provide fine mesh flyproof screen to ventilation gap.

FASCIAS
To be wrot at 25mm nominal thickness painted softwood with rebate for soffit. Frame out in 38 x 25 S/W for soffit support.

CEILINGS
Provide and fix 12.7mm GYPROC Wallboard to all new ceilings. Nog all perimeters and board joints prior to fixing plasterboard to fully support sheeting. Fix GYPROC coving and ARTEX finish to ceiling..

LATERAL RESTRAINT
Provide patent 30mm x 5mm galvanised mild steel BATSTRAPS or similar at 1.8m centres at first floor level, ceiling joist and rafter levels where they run parallel to the walls. Solid strut below the straps and tight pack against the walls.

STUDWORK PARTITIONS
To the first floor, or where shown, form studwalls in 75mm x 50mm softwood studs at 400mm centres with 75mm x 50mm head and sole plates and noggings at 1200mm centres. Clad with 12.7mm GYPROC WALLBOARD scrim tape joints and skim finish. Pack 75mm thick fibreglass between studs. Provide double floor joists where under partitions.

WALLS
Cavity work to be 265mm overall width comprising 100mm clay facing bricks. 65mm cavity filled with CROWN DRITHERM fibreglass insulation batts. 100mm load bearing "Thermalite" insulation blocks. Internal partitions to be in 100mm blockwork walling. Wall ties in cavity walling to be stout galvanised wire butterfly type at 900mm centres horizontally and 450mm centres vertically every alternate tie course to be staggered 450mm. At openings provide ties at 225mm centres vertically within 225mm of the openings.

WINDOWS AND DOORS
Windows and doors to be white UPVC unless other indicated. All windows and doors to be double glazed (sealed unit type).

SOUTH HOLLAND D.C.
PLAN DEPT.
28 JUL 1994
REF ...S/136/94...

DETERMINED PLAN

G. R. MERCHANT
LENG AMICE, FIWO,
ARCHITECTURAL, STRUCTURAL & LAND DRAINAGE CONSULTANT
TEL: HOLBEACH (0406) 490800

PROJECT:
Extension to
THE COTTAGE.
HIGH ROAD.
WHAPLODE.
SPALDING. LINCS.

CLIENT:
G. DAWSON.

SCALES: 1/50 & 1/100. (UNLESS OTHERWISE STATED)
DATE: JULY 1994.
G.R.MERCHANT.
DRAWING No.: GD. 1.
REVISIONS:

SUMMIT
1089-2937