
This drawing is copyright and may not be altered, traced, copied, photographed or used for any purpose other than that for which it is issued without written permission from J.J. Hartley.


revisions:

A. 16.8.19 RT3 & RT4 removed from site plan MJ
27.8.19 s & v p's shown MJ
& Target U values

B. 19.9.19 'STP's in new position MJ
& RT2 removed

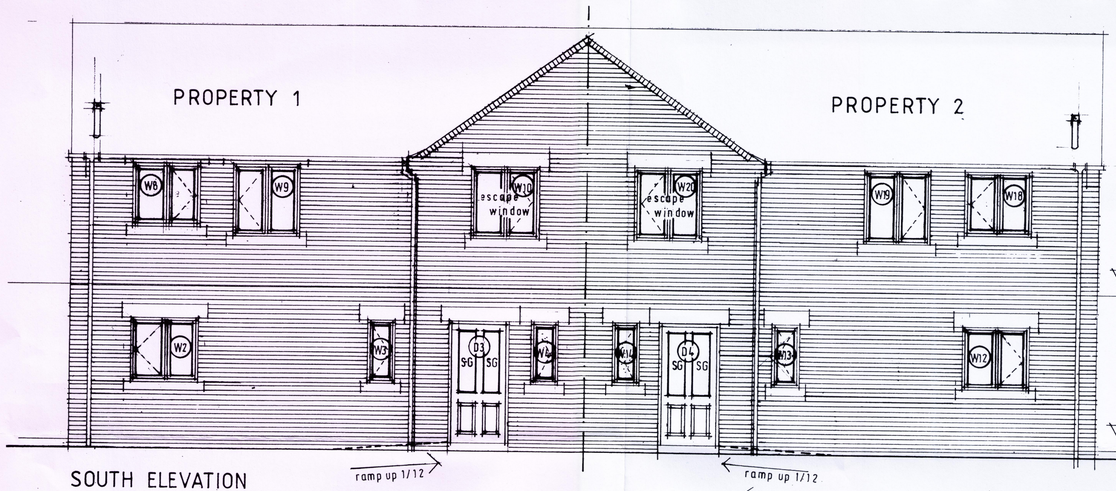


SOUTH ELEVATION

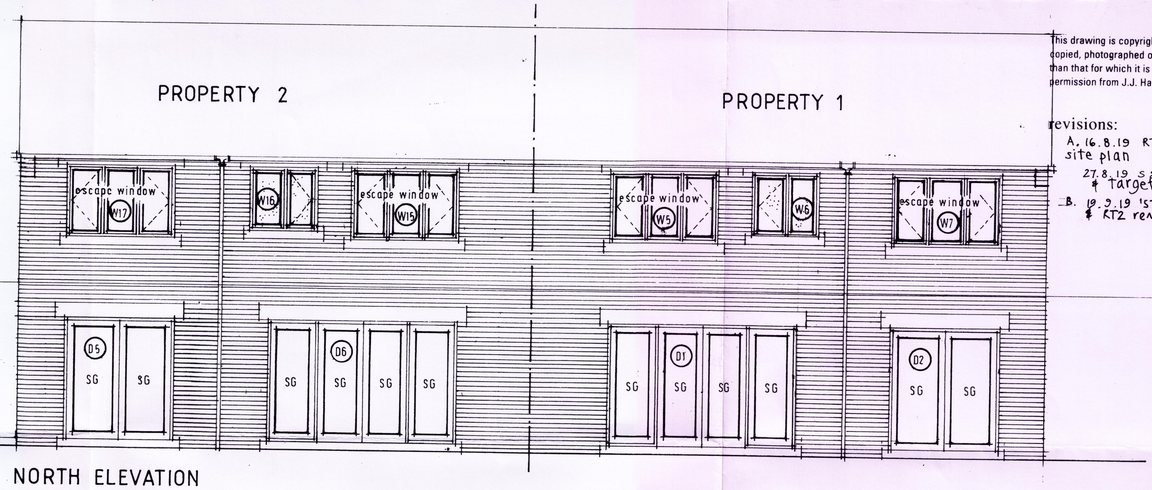


NORTH ELEVATION

SG denotes safety glazing to BS 6206

notes:

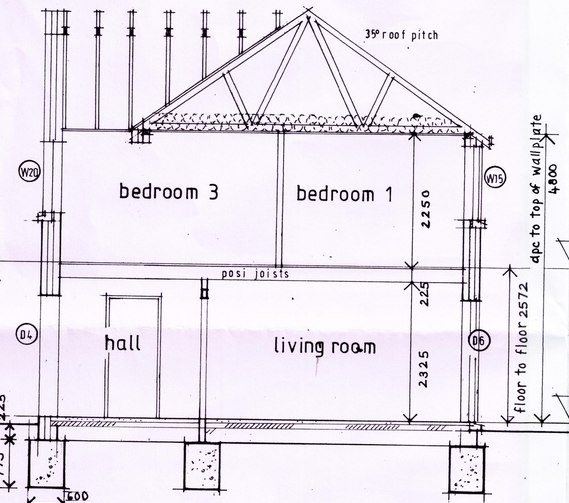


SECTION A A




VERGE DETAIL 1/20


FIRST FLOOR LEVEL

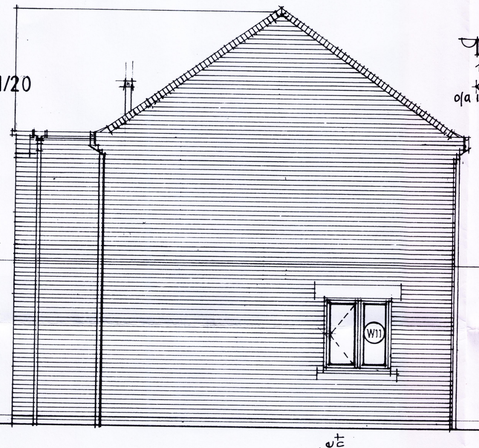

EAST ELEVATION




EAVES DETAIL

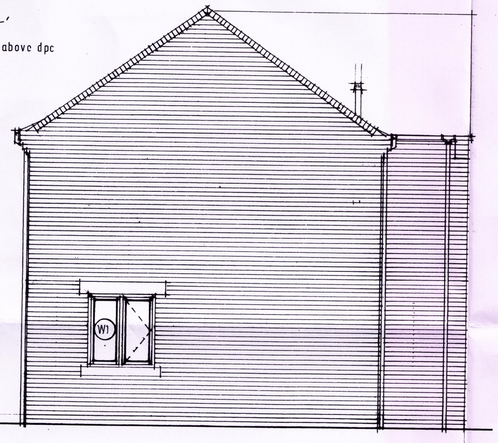


WEST ELEVATION


All 100 blockwork internal walls to be LOAD BEARING off conc. trenchfill foundations (except partitions forming wc)

Party wall construction:
2no. skins of 100 light weight aggregate blocks (1350 – 1600 kg/m3), 100 cavity & 13mm plaster (or cement:sand render) with plaster skim (min. 10kg/m3) both sides, built up to underside of roof covering and fire stopped.
- Fully fill all blockwork joints with mortar.
- Make sure there is no connection between the two leaves except for wall ties and foundations
- Keep chases for services to a minimum and fill well with mortar. Stagger chases on each side of the wall to avoid them being back to back.



PARTY WALL CONSTRUCTION 1/20

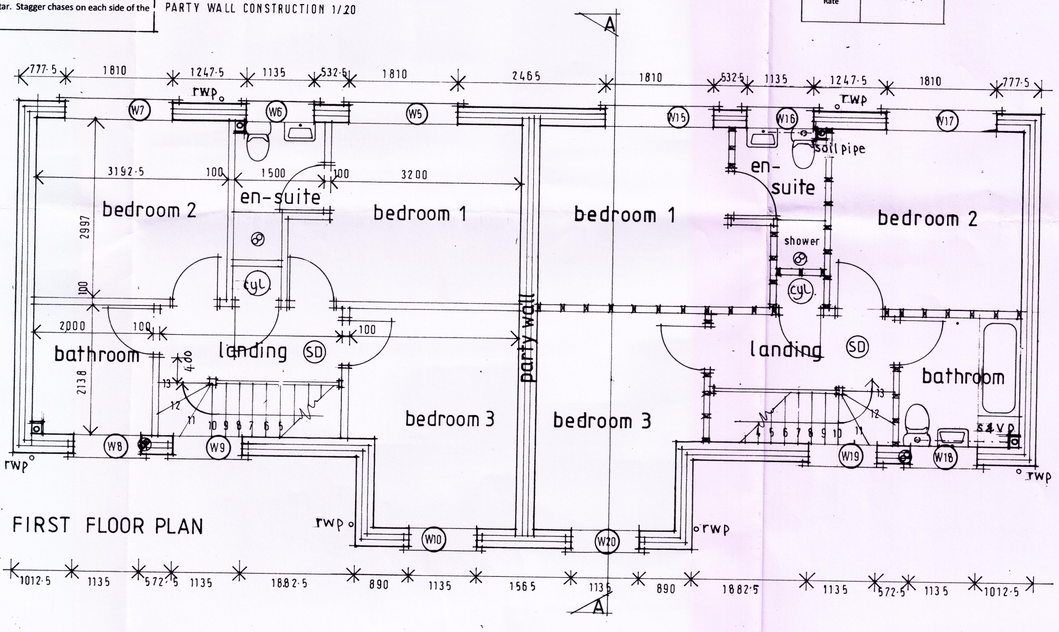

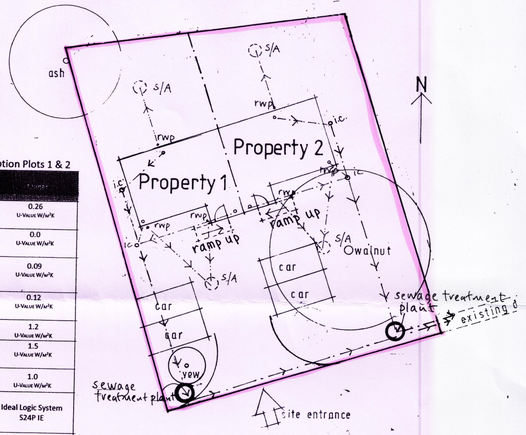

SITE PLAN 1/250

LPG Heating Option Plots 1 & 2

External Wall	0.26 U-Value W/m²K
Party Wall	0.0 U-Value W/m²K
Plane Roof	0.09 U-Value W/m²K
Ground Floor	0.12 U-Value W/m²K
Fixed Glazing	1.2 U-Value W/m²K
Bi Fold Doors	1.5 U-Value W/m²K
Door	1.0 U-Value W/m²K
LPG Boiler	Ideal Logic System S24P IE
Hot Water	150 Ltr Cylinder
Lighting	100% low energy lighting within the dwelling.
Design Air Permeability Rate	Both Plots 4.6 m³/(h.m²)

J.J. & J. HARTLEY
J. J. Hartley, M.C.I.A.T., M.C.I.O.B.
PRINCIPAL
Architectural and Project Management Services
Interior Design Consultants and Surveyors
109 Fulbridge Road, Peterborough, PE1 3LE
Tel: 01733 707012
Email: jjhartleypeterborough@gmail.com

job:
MR G BARRON
THE SYCAMORES
BACK BANK
WHAPLODE DROVE
LINCS.
PE12 OTT

drg:
Proposed pair of semi-detached dwellings

scale: 1/50
date: 4/7/19
drawn by: nk
drg. no.: 4637/1B