

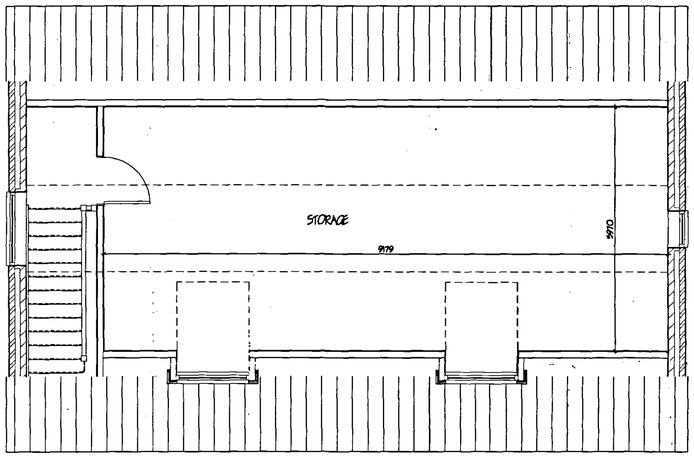



FIRST FLOOR

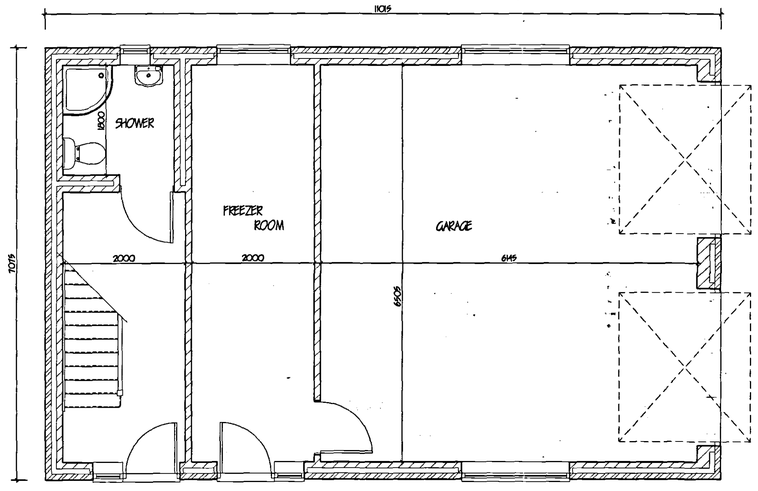


GROUND FLOOR

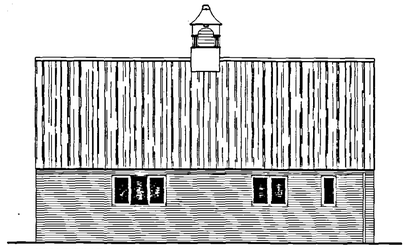


WEST ELEVATION




SOUTH ELEVATION

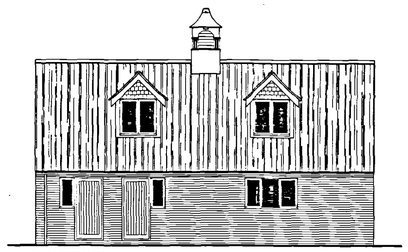

EAST ELEVATION



NORTH ELEVATION

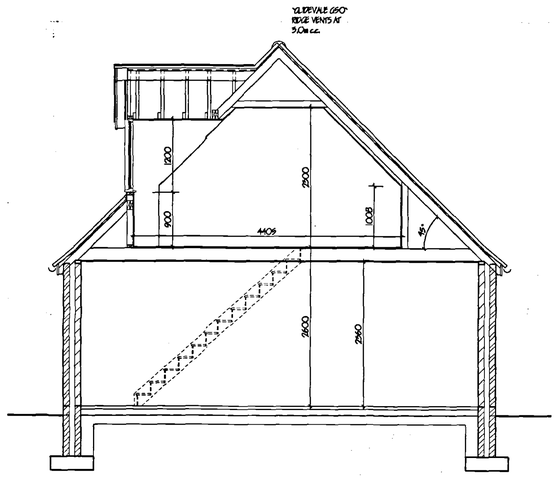

SECTION

VENTILATION.
All windows to have opening lights to give the equivalent of 1/20th the floor area. Provide background ventilation to habitable rooms min. 8000mm sq permanent free air ventilation per room. To all other rooms provide min 4000 sq. All following rooms to have in addition to above Wall/ Window mounted mechanical extractor fan. Kitchen to extract min. 60 litres per second. Utility rooms to extract min. 30 litres per second. Bathrooms to extract min. 15 litres per second which may be operated intermittently. W.C. to extract min. 6 litres per second with 15 minute overrun.

HOT WATER.
Basin to be provided by self contained thermostatically controlled instantaneous water heaters.

LINTELS.
All lintels to be manufactured by Messrs. I.G. Cookes L1/ S 75 and L1/ HD 75 all to be installed in accordance with makers' instructions, and to have min. end bearing of 150mm and at external positions to have cavity tray D.P.C. to CP. 121: Internal lintels to be I.G. 100 Box type. Lintels in garage to be underlined with 12.7 Fire line board or receive 12mm render and skim. Provide Perp-end weep holes and stop ends to cavity tray

FOIL DRAINAGE
Inspection chamber construction to be "Osma" and installed in accordance with makers' instructions with the internal diameter related to the depth in accordance with B.S. 8301:1985. Foil drainage pipes to be 110mm dia. UPVC, to B.S. 4660:1989 flexibly jointed and laid to makers' instructions to a fall of 1:70 bed and surround with 100mm pea gravel: Where pipes pass under floors encase in 150mm pea gravel: Where pipes pass under drives surround in 150mm concrete with flexel joints to correspond with joints in pipe work. Provide 65 x 100 pre-stressed concrete lintel bridging where pipes pass through walls, provide compressible filler around pipe, opening masked both sides of wall with ridged sheet material: Soil and vent pipes to be 110mm dia. PVC to B.S. 4514: 1989 and to extend 900mm above window head terminating with PVC balloon. Waste pipes to be generally 40mm dia. If over 3.0m long run increase to 50mm dia. All PVC to B.S. 5955: 1979 complete with rodding eyes at every change of direction: Bath, basins and sink to have 75 deep seal traps: Shower to be raised on 150mm plinth with access plate to anti-syphon trap and 50mm waste. All recalcitrant drains to be cradled cut or filled with lean-mix concrete. Condensation drainage from boiler flues to discharge via min. 22mm diameter pipe work through a 75mm condensation trap. Alternatively an additional trap should be provided externally to provide the required seal, an air app should be provided between the boiler and the trap. Septic tank / Treatment plant operating and maintenance instruction notice to be provided by installer.

SURFACE WATER DRAINAGE.
115mm dia. half round rainwater gutters to 65mm dia. rainwater pipes: 110mm dia. underground pipes flexibly joined to a fall of 1:70 pipes bedded and surrounded in pea gravel and discharge to 1.2m dia. soak away min. 5.0m to edge from dwelling. All footpaths and drives to slope away from building.

GLAZING.
Double glaze properly throughout with timber/ p.v.c.u windows (minimum 16mm air app to all units with Low 'E' 0.1 Glass) ave. 'U' value 1.9 W/ sq.m. K excluding garage. All glazing between f.f.l. and 800mm high and between f.f.l. and 1900mm high in doors and side lights to be safety glass to B.S. 6206. All windows/ doors to be draught sealed.

PITCHED ROOF CONSTRUCTION.
Interlocking concrete roof tiles to B.S. EN 490 / 491, on 25 x 38 softwood treated battens on under felt to B.S. 747 (type 1F) and in all cases to be lapped by 150mm both vertically and horizontally. Tiles to be laid with min. head lap of 75mm and to be fixed in accordance with respect to wind speed, roof pitch and exposure category as detailed in B. S 6399, Pt 2. Tyneplate specialist made prefabricated roof trusses to comply with B.S. 5268 part 3 1988. TRUSS CALC'S TO BE SUBMITTED TO L/ A. MIN. 28 DAYS PRIOR TO ERECTION. Trusses to be at 600c/ c to a pitch of 45 deg. 38 x 100 ridge rode binder 38 x 100 ceiling binders. All trusses to be strapped to wall plate by 30 x 5 galvanised metal straps acting as anchor and lateral restraint straps at max. 1.5m c/ c. Note: provide solid bridging beneath straps: 50 x 100 wall plate bedded on sand and cement: 25 x 175 fascia boards: 6mm est. grade plywood soffit complete with 25mm wide continuous air app and fly proof screen: All structural timber to be min.SC5 grade, stamped 'DRY' or 'KD' to indicate moisture content of 20% or less all in accordance with BS. 4978. Where span of trussed rafter exceeds 5.0m provide additional bracing within the plane of the webb in accordance with Truss Plate Assoc. tech. bulletin sheet 4.

CEILINGS / INSULATION.
Roof Level: Flat ceilings lay 250mm glass fibre insulation total thickness. 100mm between joists & 150mm over Joists to provide max. 'U' value of 0.16 W/ sq.m.K. Sloped ceilings lay "Celotex GA5080 + GA5040 `to provide a max 'U' value of 0.2 w/ sq.m.k. Ensure 50mm air app over all insulation. 12.5mm Gyproc wallboard,skim finish: Provide min. 38 x 38 noggins to all plasterboard edges. All joints to be taped and filled. Provide access trap to roof space: opening to be lined with 25 x 25 planted slope: Access panel to be 12mm ply with layer of 12.7mm Fireline board fixed to face. 100mm Jablite to top surface. Provide slide bolt fastening & draught seal all round
Mid Floor Level: 12.5mm Gyproc SoundBloc,skim finish. 100mm Isowool General Purpose roll infill between joists. Provide min. 38 x 38 noggins to all board edges. All joints to be taped and filled.

WALLING.
285 cavity walling to consist of face brickwork to B.S. 5921:1974 for clay bricks and B.S. 187:1978 for calcium silicate bricks: 85 cavity build into cavity 215mm cavity wall batts insulation boarding in accord. with makers instructions and agreement cert' No.84/ 1268 & 86/ 1584. 100mm Tarmac Hemelite 3.5 N/ mm2 solid insulation blocks or similar: Cavity walls tied together using galvanised iron twist ties set 750 horizontally and 450 vertically to B.S. 1243:1978 wall ties positioned at 300 vertical centres at all unbonded closures of cavity: Close cavities with "Thermabate" preformed closer and provide bitumen felt DPC to C.P. 121: All work to be carried out in accordance with BS Code of Practice 121 Pt 1. 1979. External walls to have max. 'U' value of 0.35 W/ sq.m.K. Internal walls of 100mm Tarmac Hemelite solid insulation blocks.
Movement joints to be installed in blockwork in accordance with B.S. 5628 pt. 3 1985.
All to receive 13mm lightweight plaster finish. (except garage). Stud walls to consist of 38 x 89mm c.l.s studs at 600mm c/ c, both sides to be clad with 12.5mm Gyproc SoundBloc and skim. 25mm Isowool Acoustic partition roll infill between studs

SUB STRUCTURE WALLING.
100mm dense concrete blocks to B.S. 6073 pt.1 1981: DPC to external wall positioned in accordance with CP 102 min. 150 above finished ground level: Weak mix concrete infill to base of cavity no closer than 225 to DPC. All brickwork below DPC to be F.L. quality.

GROUND FLOOR CONSTRUCTION.
Strip all vegetable soil and lay floor as follows: 70mm sand and cement screed with chicken wire reinforcement on 500ga polythene D.P.M. on 40mm 'Celotex GA5060' insulation board, on 1200ga polythene D.P.M. lapped continuous with D.P.C. by min. 100mm, lay 300mm wide D.P.M. strip into D.P.C. to lap floor D.P.M. All on 100 concrete over site: Concrete mix GEN4 to B.S. 5328: pt1 1991: 150 blinded and consolidated hardcore : Garage floor to be as above except sand cement screed and insulation

FOUNDATIONS.
Under walls as shown provide strip concrete foundations as follows: Under 285 cavity walls provide 225 x 700 and under 100 walls provide 225 x 450 all GEN4 mix to B.S. 5328: pt1 1991. All foundations taken down to bear on load bearing strata min. depth of 600 to top of foundations: should shrinkable soil conditions be found on site then foundations shall be taken down to a minimum depth of 1 metre below ground level. Where internal walls are taken up off floor then thicken out slab to 225 x 450 or if considered necessary be taken down to 225 x 450 foundation.

STAIRCASE AND BALUSTRADE.
Construct staircase as follows: 900mm clear width. 13No. risers of 200mm ex 29 x 225: 225 going ex 92 x 250: pitch 42deg. Min. head room 2.0m measured vertical above pitch line. All in accordance with B.S. 5395:1977. Staircase to have ex 38 x 90 shaped hardwood handrail min. 900 above pitch line. 100 x 100 softwood newel post. Gap between vertical balusters not to exceed 99mm. Handrail and balustrade to be capable of resisting the appropriate load specified in B.S. 6399: Pt. 1. Balustrade to be min. 900mm high.

LIMITATIONS.
This drawing is limited in the amount of information contained and does not purport to contain a full specification of the works. It is solely for the purpose of obtaining Planning/ Building Regulation approval.
The drawing must not be used as a contract document alone.
All dimensions shall be taken from site from actual work. Under no circumstances shall measurements be scaled from this drawing for construction or ordering purposes.
All given dimensions shall be checked by the Builder/ Contractor and will be his responsibility from commencement of site works.
The works will not be supervised or inspected on site by G.R. Merchant, or any representative thereof. It is the client or their appointed agents responsibility to control workmanship, substitution of materials, adherence to specification, variations to contract etc.

COPYRIGHT RESERVED.
Copies of this drawing must be made only with the written permission of G. R. Merchant.

STANDARDS.
All materials to be new unless otherwise stated and all components and materials etc. to be used fitted and installed etc. in strict accordance with manufacturers instruction and relevant Code of Practice.
Materials shall conform to appropriate British Standard Specification or BBA Certificate or European Code equivalent.

HEALTH & SAFETY.
The Employer/ Client shall ensure that the selected contractor is conversant with and adopts all measures necessary to achieve compliance with Health & Safety legislation for Building Sites and Work Places.
The Employer / Client is advised that should the works need to comply with the Construction Design and Management Regulations an independent Planning Supervisor will be required.

SCOPE OF THE WORKS.
The works shall comprise of all that is shown on the drawing and details. Work that may not be specifically shown but may be reasonably inferred as necessary to carry out the works shall be deemed to be included.

ref:	revision	date

G. R. MERCHANT
I.ENG AMICE FTWO
ARCHITECTURAL, STRUCTURAL AND LAND DRAINAGE CONSULTANTS
Unit 4, Wrights Mews
12A Park Road, Holbeach,
Spalding, Lincs. PE12 7EE
Tel: 01406 490800
Fax 01406 425744
E-Mail: G. R. Merchant @ Merchant. Fs. Co. UK

Project
REPLACEMENT GARAGE & STORE
COBGATE
WHAPLODE
SPALDING LINC`

Client
MR & MRS R. J. H. CREESE

Drawing
DETERMINED PLAN

Job Ref.	Drawing No.
914-04	01
Date	Drawn
MAY '04	J.C.

Scales
1:50 1:100

DO NOT SCALE FROM THIS DRAWING

This drawing is copyright and may not be altered, traced, photographed or used for any other purpose other than that for which it is issued.
The General Contractor is to check all dimensions on site and report any discrepancies to the Architect.
All details shown on this drawing including foundations are based upon typical site conditions related to the area. No responsibility can be accepted for abnormal conditions which may be discovered during construction unless reported to the Architect so that design amendments may be considered. Site soil surveys are recommended in respect of foundations to establish specific site conditions before foundation work is undertaken.

SHDC
Planning & Development
25 JUN 2004
Ref: 0858/04