



SIDE ELEVATION
(EAST)

SCALE:– 1:100

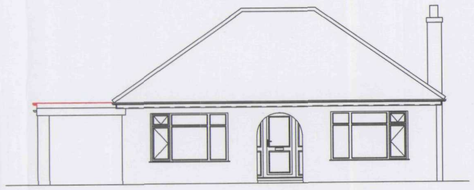


FRONT ELEVATION
(NORTH)

SCALE:– 1:100

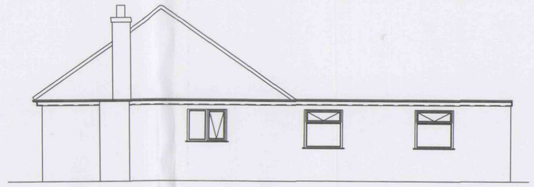


SIDE ELEVATION
(SOUTH)

SCALE:– 1:100

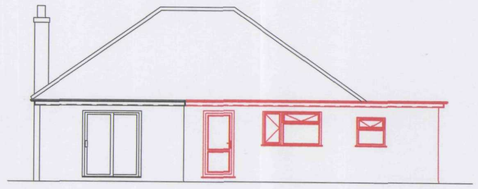


REAR ELEVATION
(WEST)

SCALE:– 1:100

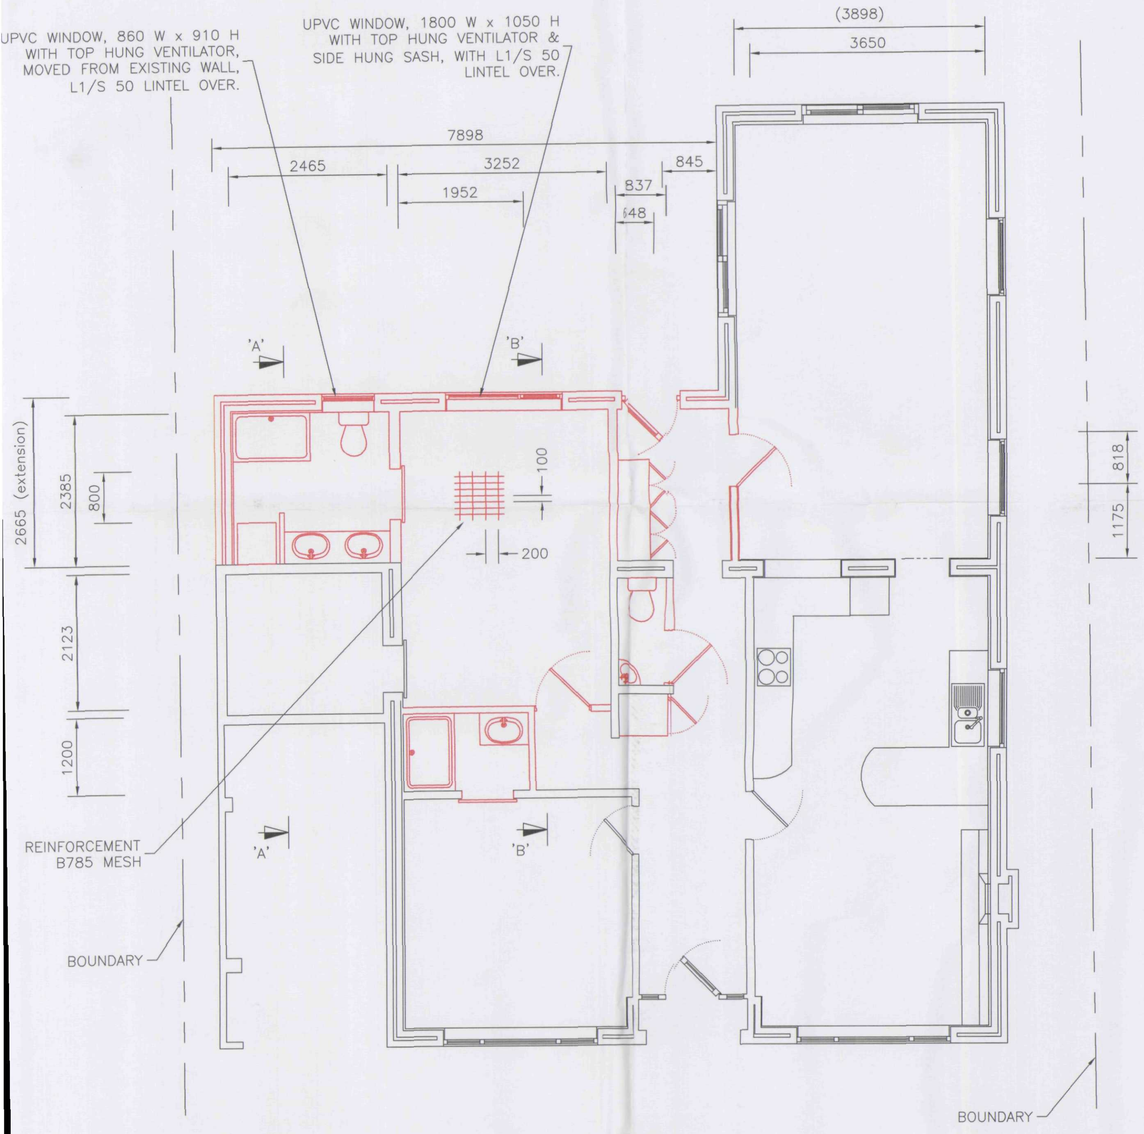



PROPOSED FLOOR PLAN


SCALE:– 1:50

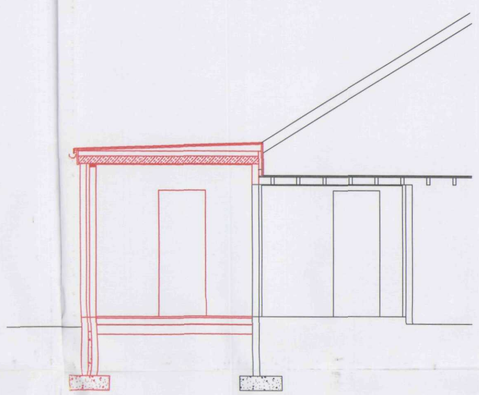

SECTION ON 'A–A'
SCALE:– 1:50

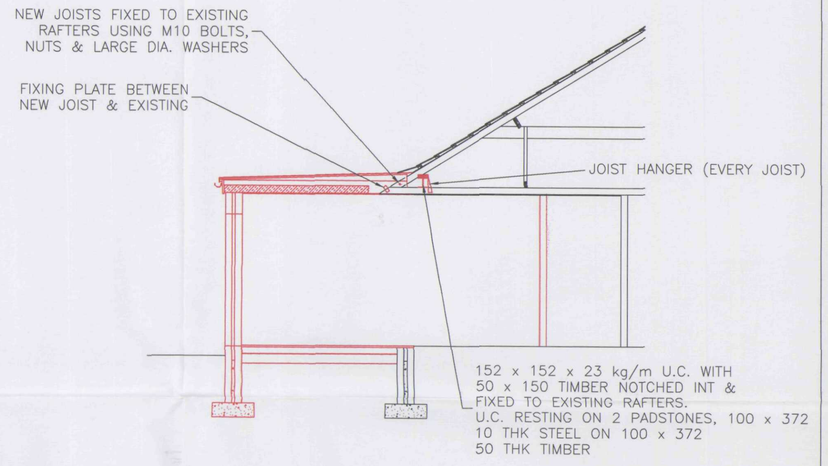


SECTION ON 'B–B'
SCALE:– 1:50

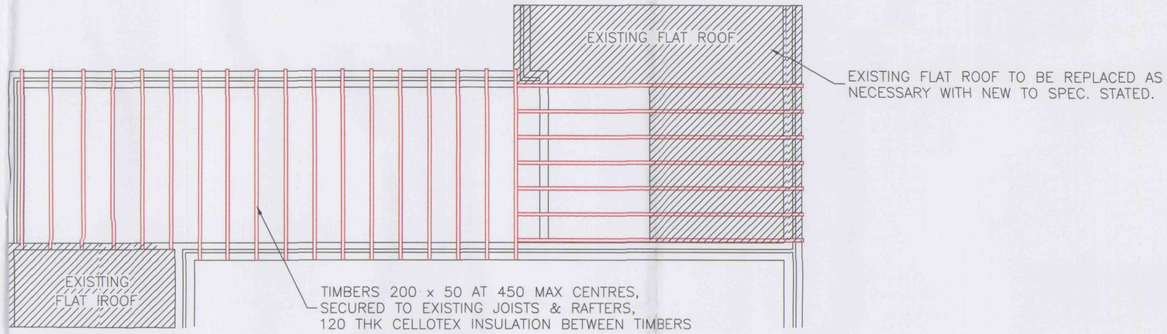


ROOFING DETAIL
SCALE:– 1:50

NOTES:

1. FOR EXISTING FLOOR PLAN SEE SHEET 2
2. FOR DRAINAGE DETAILS, SEE SHEET 3
3. ROOF TO COMPRISE OF 12.7 mm PEA SHINGLE ON 2 LAYERS OF HIGH PERFORMANCE ROOFING FELT ON WBP PLYWOOD DECK, ON FIRRINGS TO GIVE MINIMUM 1:40 FALL.
4. EXTERNAL WALLS TO BE 280 CAVITY CONSTRUCTION CONSISTING OF 110 SKIN OF FACING BRICKWORK (TO MATCH EXISTING), 75 CAVITY FILLED WITH APPROVED INSULATION, & INNER SKIN OF THERMALITE BLOCKWORK GIVING MAX 'U' VALUE OF 0.35 WmC
5. FOUNDATIONS TO BE 650 WIDE x 225 THK AT DEPTH TO SUIT SITE CONDITIONS.
6. FLOOR TO BE 40 SCREED ON 150 THK REINFORCED CONCRETE SLAB, GRADE C35, ON 1200 GRAIDE POLYTHENE, ON 100 JABLITE, ON 100 HARDCORE BLIND WITH SAND.
7. ALL NEW WINDOWS TO BE UPVC FRAMED, DOUBLE GLAZED UNITS TO MATCH EXISTING, TO LATTEST BUILDING REGULATIONS SPECIFICATION.
8. ALL NEW INTERNAL DOORS TO BE 750 CLEAR OPENING, WITH L10 LINTEL OVER.
9. NEW EXTERNAL DOOR TO BE 775 CLEAR OPENING, WITH L1/S 50 LINTEL OVER.

SHDC
Planning & Development
30 JUL 2004
Ref: 1039/04

PROPOSED EXTENSION

At:
ENSHARLA, STOCKWELL GATE,
WHAPLODE, SPALDING,
LINCS., PE12 6UE

For: Mr & Mrs D. E. Buckland

| | | |
|---|---|---|
| Scale: As stated | Drg. Ref.: | A |
| Drn: D.E.B. | EXT0403 | 1 |
| Date: July 04 | SHT 1 OF 3 \| Iss: A | |