

(2)


Window Cills

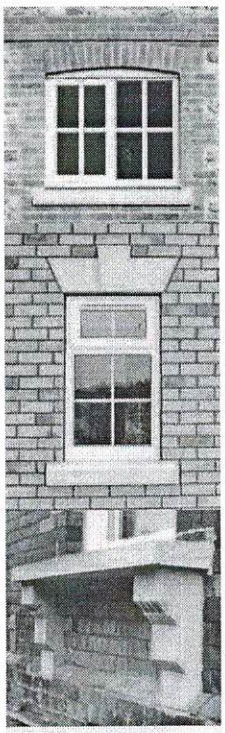


Type Ref: SCL83 stooled cill. max length 1600 **Stock**

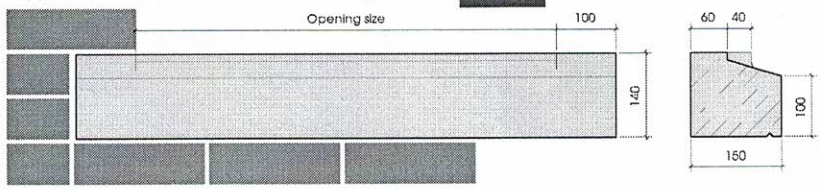


Type Ref: SCL90 stooled cill. max length 1600

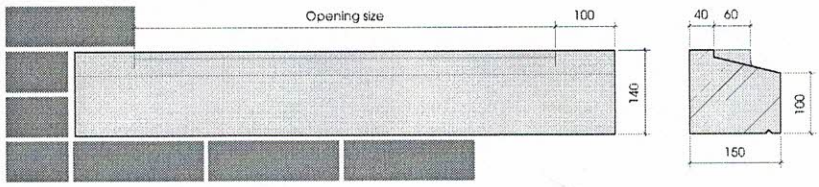





Type Ref: SCL84 stooled cill. max length 1600

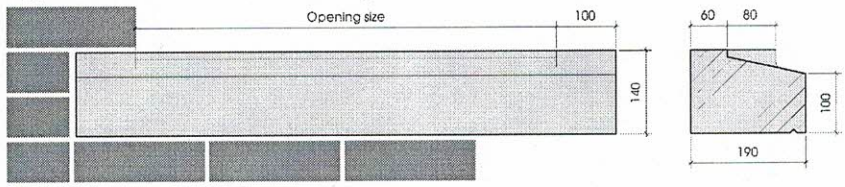



Type Ref: SCL91 stooled cill. max length 1600

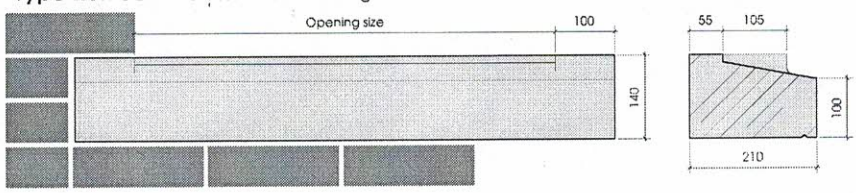




Type Ref: SCL87 slip cill. max length 1100

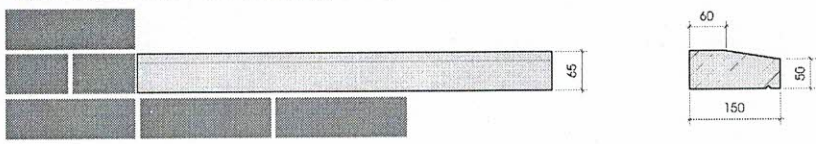






Type Ref: SCL88 slip cill. max length 1100

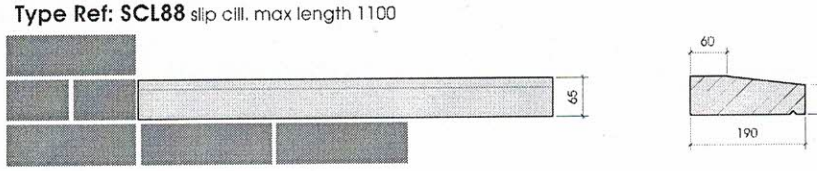

Type Ref: SCL89 slip cill. max length 1500

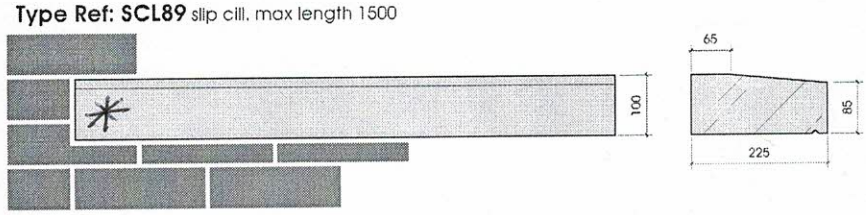

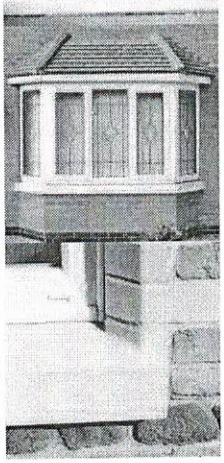

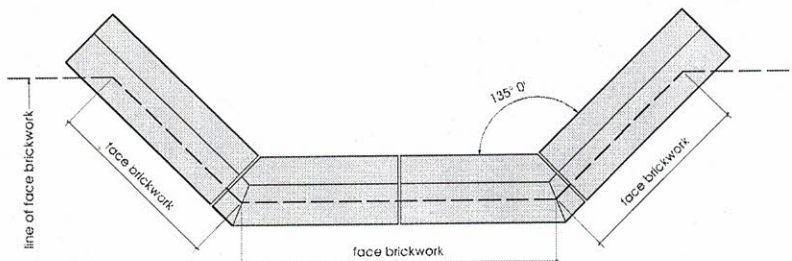

Stock sizes available:

1970 to suit 1770 opening
1400 to suit 1200 opening
1115 to suit 915 opening
830 to suit 630 opening
688 to suit 488 opening


Details:
All our standard designs can be cast as slip cills where no stoolings are required. A groove to receive a water bar may be included, please specify when ordering.

Ordering:
Please note the Cill type, colour and the opening size required.


Maximun lengths:
Where the required length is larger than that illustrated, the cill will be cast in 2 or more sections, allowing for nominal joints.

Installation:
Stooled cills should initially be bedded under stooling only. The remainder of the cill should be pointed at building completion.
Note: Lime/sand mortars are recommended as a strong mix may cause stresses in the masonry.

Bespoke units:
Please note that other cill designs can be produced to your own design, or to match existing units.



SCL87 & SCL88
65mm deep slip cills. These are not designed to be built into the brickwork at each end. They are made to suit the opening size only.



SCL89
Slip cill designed for fitting under traditional sash windows located 110mm in reveal.

135° & 90° Bay cills:
These are the 2 standard angles available. Please phone to discuss if a different angle is required.
When ordering bay window cills please provide the external face brickwork dimentions as shown. A production drawing will then be supplied for you to check. The return legs are cast to be built into the face brickwork.

Fax: 01406 364412 Tel: 01406 362262