

DO NOT SCALE

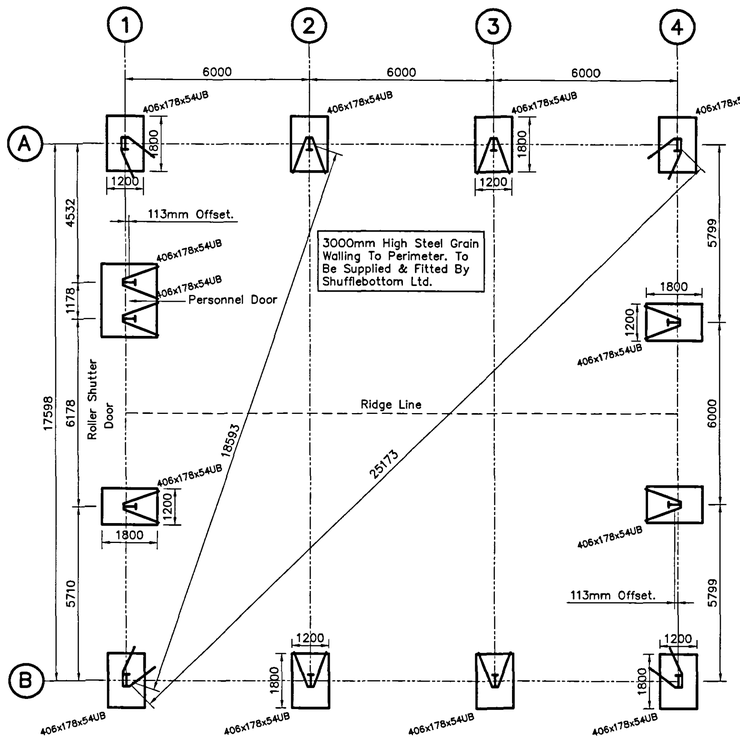


All Main Columns to Have 2 No. T20 ø x 4500mm lg. Hairpins tied into Reinforced, Concrete Slab. (By Others)


FOUNDATION PLAN
1:100

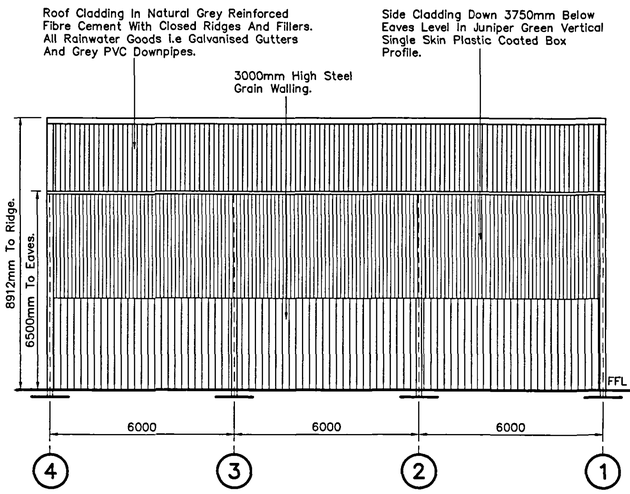


ELEVATION ON LINE A.
1:100

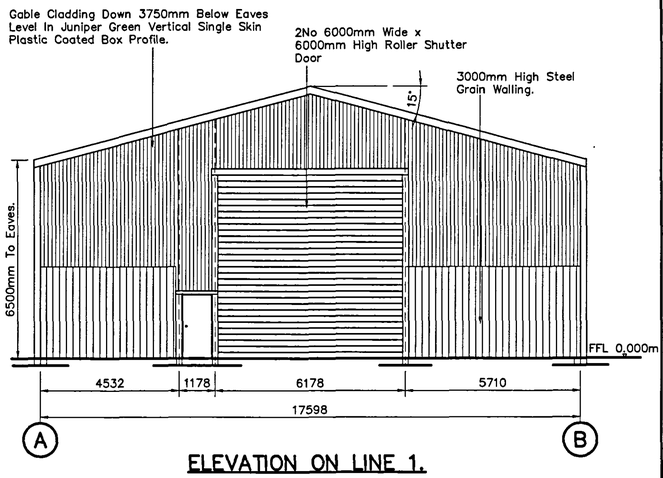


ELEVATION ON LINE 1.
1:100

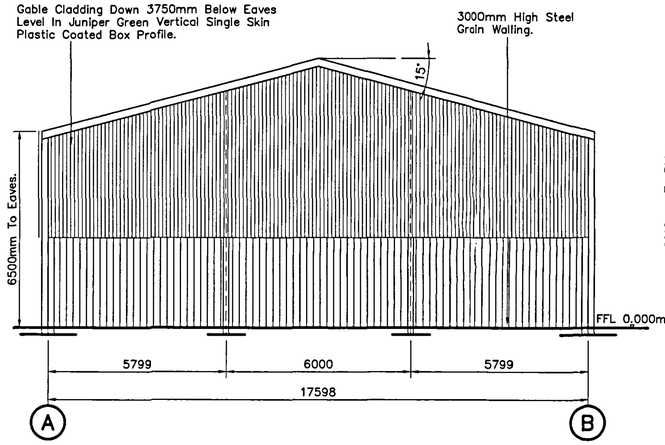


ELEVATION ON LINE 4.
1:100

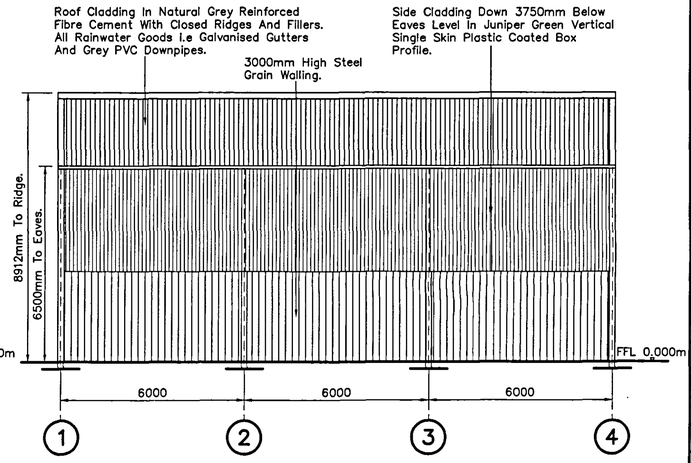


ELEVATION ON LINE B.
1:100

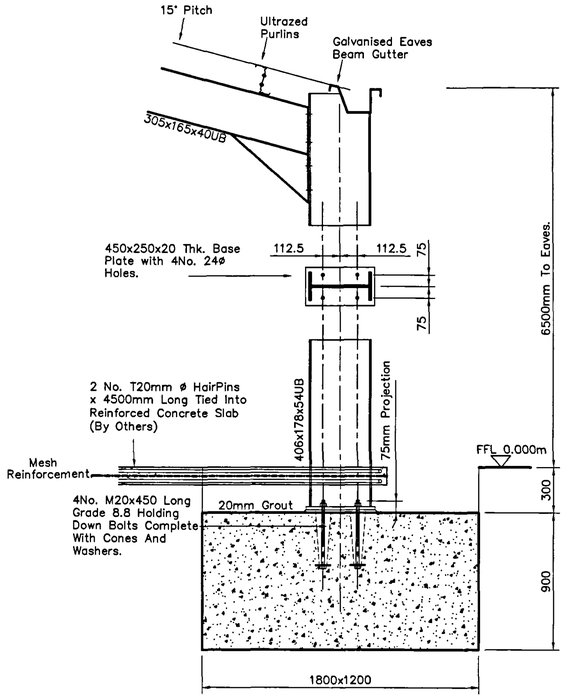

FOUNDATION DETAIL FOR MAIN COLUMNS ON LINES A AND B.
1:20

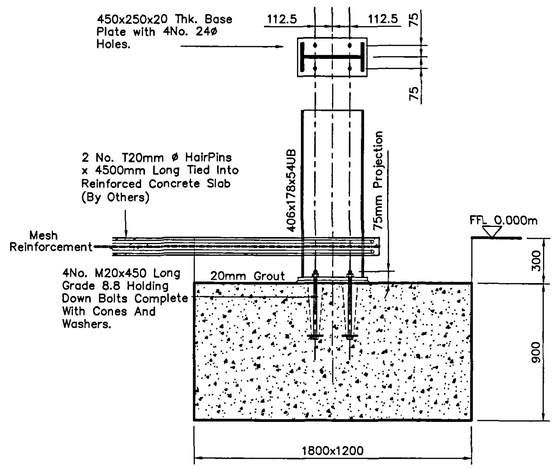

FOUNDATION DETAIL FOR GABLE COLUMNS ON LINES 1 AND 4.
1:20



GABLE COLUMN OFFSET ON LINE 1 AND OPPOSITE ON LINE 4.
1:20

ORIGINAL DRAWING A1

NOTES

BUILDING DESIGN ALLOWS FOR A SOIL BEARING CAPACITY OF 150kN/sqm. CLIENT TO CONFIRM ACTUAL CAPACITY.

SOIL ANALYSIS TO BE ARRANGED BY CLIENT IF REQUIRED.

STEELWORK SHOTBLAST TO BS SA 2.5 HOT DIPPED GALVANISED FINISH TO BSEN ISO 1461.

3.5 METRE CLEARANCE REQUIRED TO FULL PERIMETER OF BUILDING FOR SAFE ERECTION, WITH FIRM HARDSTANDING SUITABLE FOR ACCESS AND LIFTING PLANT. (UNLESS ATTACHED TO EXISTING BUILDING)

ALL GROUT TO BE SUPPLIED AND INSTALLED BY CUSTOMER. (UNLESS AGREED OTHERWISE)

ALL CONCRETE AND PLANT SUPPLIED BY CUSTOMER. (UNLESS AGREED OTHERWISE)

ALL DIMENSIONS ARE FROM CENTRE TO CENTRE OF STEELWORK ON FOUNDATION PLAN UNLESS NOTED OTHERWISE, EXCEPT IN THE CASE OF ANGLES AND CHANNELS WHERE DIMENSIONS ARE TAKEN FROM THE OUTSIDE FACE OF THE ANGLE AND CHANNEL.

THIS IS HOW WE HAVE INTERPRETED YOUR REQUIREMENTS.

IF THIS IS INCORRECT COULD YOU PLEASE NOTIFY US WRITING WITHIN 7 DAYS OF RECEIVING YOUR DRAWING.

REV	DESCRIPTION	DRAWN	APPROVED	DATE
B	PERSONNEL DOOR ADDED TO LINE 1.	TD	MC	5.6.07
A	REDUCTION OF CLADDING TO 3750MM BELOW EAVES.	TD	LS	23.05.07

STATUS
FOR PLANNING.

SHUFFLEBOTTOM Ltd.
Cross Hands Business Park
Cross Hands, Llanelli, Carms.
Tel: 01269-831831 Fax: 01269-831031

SHDC Planning & Development
0 6 JUN 2007
Ref: 0757/07

DETERMINED PLAN

CLIENT
MR. M. COCK. RICHARDSON & COCK, WOODBINE LODGE, POSTLAND, CROWLAND, PETERBOROUGH, PE60JX.

PROJECT
PROPOSED STEEL FRAMED GRAIN STORE @ CEDAR LODGE, POSTLAND, CROWLAND, PETERBOROUGH.

DRAWING TITLE
GROUND PLAN, FOUNDATION AND ELEVATION DETAILS.

DRAWN	TRACED	CHECKED	APPROVED	DATE
TAD				11.05.07

SCALE	DRG No.	REV.
AS SHOWN	LS07-05-01/GP-01.	B