


© COPYRIGHT DEREK MORRIS
do not scale this drawing

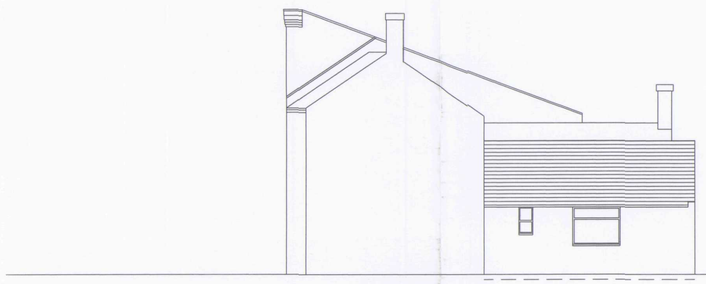

SIDE ELEVATION AS EXTG

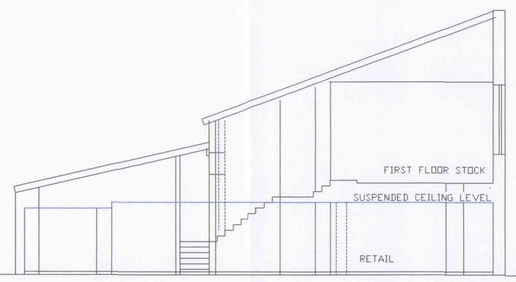

CROSS SECTION B-B 1:200

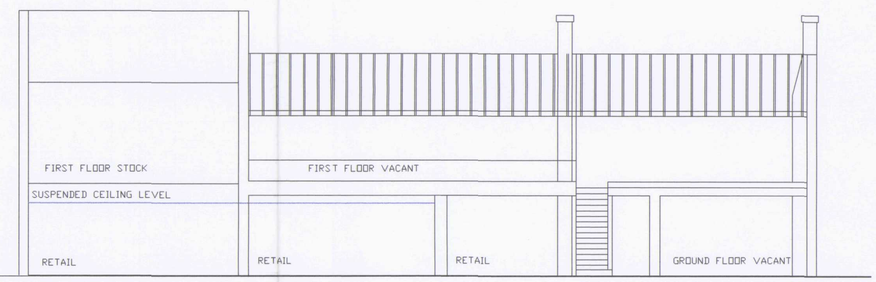

LONG SECTION A-A 1:200




ELEVATION TO MAIN STREET AS EXTG THIS ELEVATION PAINTED BRICKWK



EXTG WALL LOOSE PAINT REMOVED AND REPAINTED TO MATCH EXTG WHITE

SIDE ELEVATION AS PROPOSED

RECEIVE 75x75 TIMBER POSTS TO CONSTRUCT 1.8m HIGH HIT AND MISS BOARDED GATE SCREW FIX 150x32mm HORIZONTAL BEARERS AT 450mm VERT CENTRES AND NAIL 150x12mm BOARDS @ 200mm CENTRES TO BOTH SIDES. CONSTRUCT TWO 1.675m LEAF GATES FRAME LEDGED& BRACED WITH THE SAME HIT AND MISS BOARDING. ONE & A HALF PAIRS OF BLACK JAPANED STRAP HINGES, HASP AND STAPLE ONE LEAF TO RECEIVE DROP BOLT. FINISH STAINED BROWN

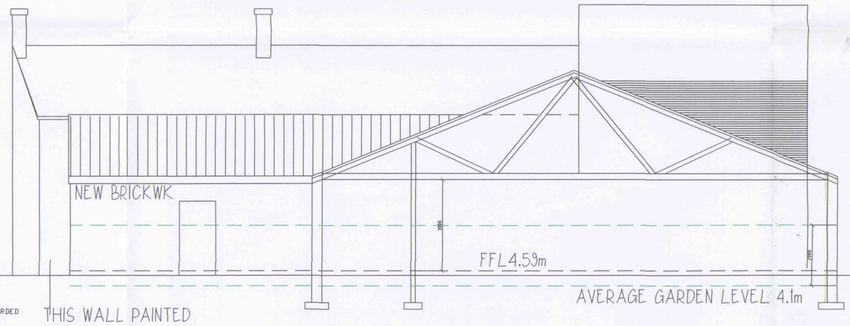

THIS WALL PAINTED BRICKWK TO MATCH EXTG




ELEVATION TO MAIN STREET AS PROPOSED


WINDOW SCHEDULE GROUND FLOOR
WG1 EXTG WITH EXT GLAZING REPAINTED
WG2 NEW TIMBER WINDOW TO MATCH EXTG WITH NEW CLEAR GLASS
DG1 UPVC AUTOMATIC OPENING CLEAR GLAZED DOOR
WG3 EXTG TIMBER WINDOW EXTG GLAZING REDECORATED
WG4 NEW TIMBER WINDOW IN REDUCED OPENING BLACK GLASS BLOCKED UP INSIDE
WG5 NEW TIMBER WINDOW OPAQUE GLAZING

WINDOW SCHEDULE FIRST FLOOR
WF1,WF2,WF3. EXTG WINDOW EXTG GLAZING WINDOWS REDECORATED
WF4,5,6,7,&8 ALL NEW TIMBER SLIDING SASH CLEAR GLASSW W

EXTG FIRST FLOOR WINDOWS REMOVED & REPLACED WITH SLIDING SASH
REMOVE EXTG GROUND FLOOR SHOP WINDOW REDUCE OPENING AND FIT NEW TO MATCH WINDOW ABOVE.
ALL GF. WINDOWS TO BE GLAZED WITH BLACK GLASS WITH BLOCKWORK BEHIND
FIT NEW SIX PANEL SOLID CORE DOORS TO EXTG DOOR OPENINGS

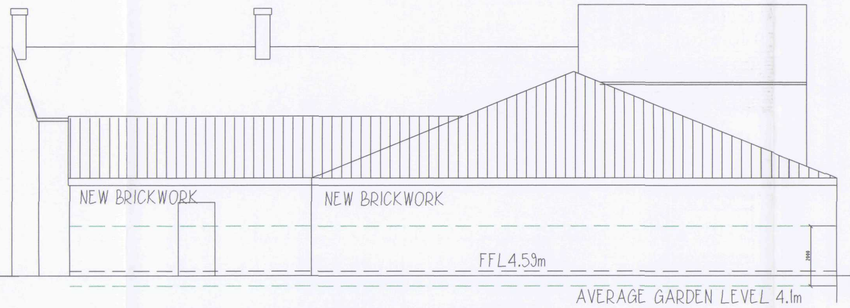

NEW EXTENSION ROOF CALDERDALE BLACK CONC ROOF TILES
NEW BRICKWORK IBSTOCK BIRTLEY COMMERCIAL RED

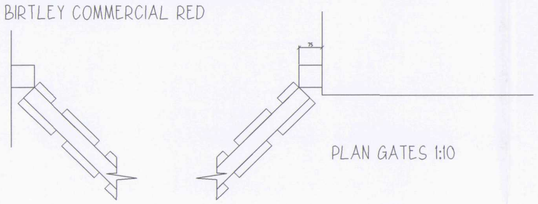


PLAN GATES 1:10



1:50 SECTION THRO BOUNDARY WALL

SMDC
Planning & Development
- 8 SEP 2003
Ref M02/0935/03



1:50 RAIN BW.

DETERMINED PLAN

REV C 040903 WINDOW SCHED-GATE DETAIL ADDED
REV B 100703 MATERIALS AMENDED
REV A 200403 ELEVATIONTO MAIN STREET AMEND

CLIENT + LCS PROPERTY LTD
PROJECT + CROWLAND
DRAWING + ELE'S AS EXTG & AS PROP
JOB NUMBER + 23-13 DRAWING NUMBER + 2313-04
SCALE + 1=100 REVISION + C

DEREK MORRIS + ARCHITECTS
7 MALT KILN ROAD + FENTON + LINCOLN + LN1 2EW
TELEPHONE + 01427-718910 FAX + 01427-718911