
WALL FACING MATERIALS

OLD CHESHIRE RED MULTI

Weinerberger Limited.





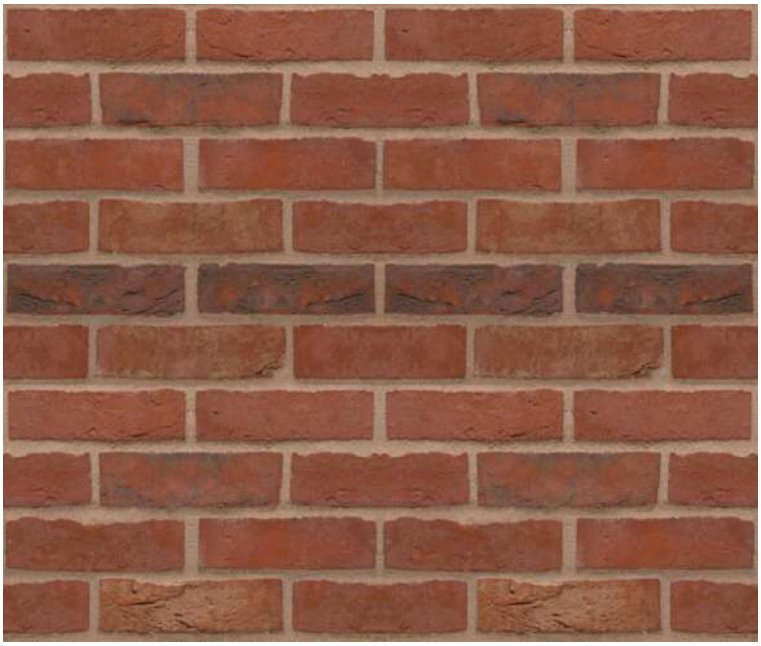

WALL FACING MATERIALS

SAWN ON THE BED WALLING STONE

Stamford Stone Limited

SAWN ON BED WALLING STONE

The stone is sawed on the bed in heights of 65, 90, 115 and 140 m m . After that, the face is then cropped by guillotine at 110 mm (the width of a standard cavity w all), leaving a textured face exposing intricate shell formations. Next, we crop the stone randomly for an authentic feel and then tumble it to remove sharp edges. Man takes over from machine in the final stages.
Each piece is then finished by hand.



SAWN ON BED WALLING STONE

CLIPSHAM MEDWELL
Commonly referred to as 'Stamford Stone', its rich warm honey tones make our signature stone a firm favourite with architects, specifiers and housebuilders all over the country.
Arguably the hardest of all the Lincolnshire limestones, it brings beauty and resilience to every project.






OAK WEATHERBOARDING

NO SPECIFIC SUPPLIER

IWC9 Cladding Profile
Feather Edged Cladding.

175mm Face (At 25mm overlap) For Horizontal Installation

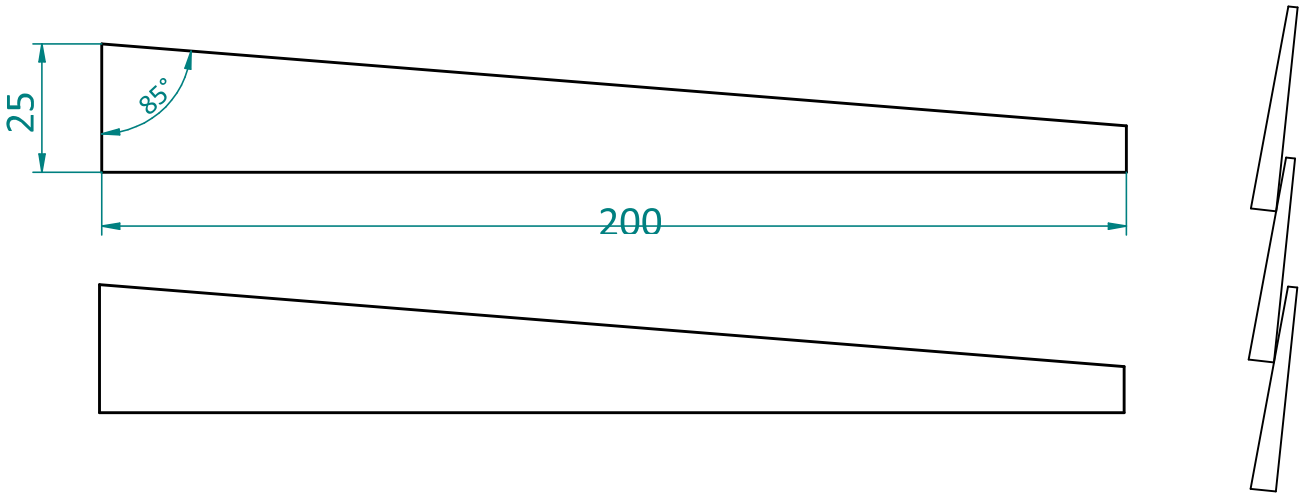

Feather edged profiles are sawn and not machined and

ROOF COVERINGS

WEINERBERGER NEO CLAY PANTILE

Weinerberger Limited.





PLAIN CLAY TILE (smooth red)

Weinerberger Limited or Redland Limited





ROOF COVERINGS

NATURAL SLATE

Weinerberger Limited.





SIZE 500mm X 250mm

WINDOWS

UPVC FLUSH CASEMENT

COLOUR: RAL 1015 : LIGHT IVORY





This photograph of the window shown here is a different colour and is for illustration purposes showing the flush type finish.

CONSERVATION ROOFLIGHT

COLOUR: BLACK


VELUX MK 06. Colour black



WINDOW HEADS

PROCTER CAST STONE

Info@proctercaststone.co.uk

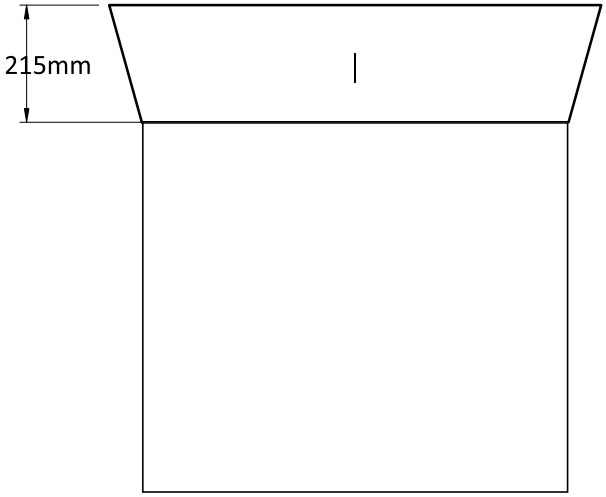



NOTE:
THE SPLAYED LINTOLS HAVE AN 80mm SPLAY AT EACH END.
LINTOL COLOUR TO BE COTSWOLD 11 or PORTLAND SHADE
LINTOLS ARE A RECONSTITUTED STONE AND WILL BE LOCATED WHERE THERE IS THE LIMESTONE WALLING.

PREMIER BUILDING PRODUCTS LTD

www.premierbuildingproducts.co.uk




NOTE:
THE SPLAYED LINTOLS IN BRICK ARE TO BE LOCATED IN THE BRICK ELEMENT OF THE BUILDING.

MARSHALLS TEGULA 60 TO ENTRANCE

MARSHALLS



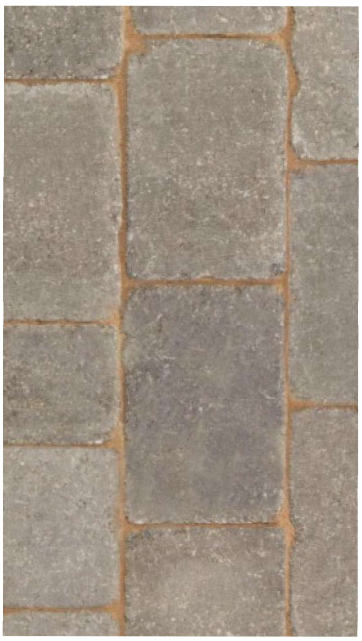

18mm CLEAN GRAVEL TO DRIVE

