FLOOD RISK ASSESSMENT
FOR RESIDENTIAL DEVELOPMENT AT
LOW GATE, TYDD ST MARY

FINAL REPORT

ECL1558/SWANN EDWARDS ARCHITECTURE

DATE JUNE 2025

ELLINGHAM CONSULTING LTD
Email: tim@ellinghamconsulting.co.uk

CONTENTS

1.0 INTRODUCTION

2.0 SITE LOCATION AND DESCRIPTION
- 2.1 Site Location
- 2.2 Existing Site
- 2.3 Proposed Development
- 2.4 Local Development Documents
- 2.5 Available Flood Risk Information

3.0 FLOOD RISK VULNERABILITY
- 3.1 The Sequential and Exception Test
- 3.2 Vulnerability Classification
- 3.3 Application of the Sequential and Exception Test

4.0 SITE SPECIFIC FLOOD RISK
- 4.1 Local Flood Assets
- 4.2 Sources of Flooding
- 4.3 Probability of Flooding
- 4.4 Historic Flooding
- 4.5 Climate Change
- 4.6 Residual Risks

5.0 FLOOD RISK MITIGATION
- 5.1 Summary of Risks
- 5.2 Mitigation Measures

6.0 CONCLUSIONS

ATTACHMENT 1 – Site and Location Plans (Dwg SE-2323 PP1000)

ATTACHMENT 2 – Environment Agency Flood Risk Information

DISCLAIMER
This document has been prepared solely as a Flood Risk Assessment in support of a planning application for proposed residential development at Low Gate, Tydd St Mary. "Ellingham Consulting Ltd" accepts no responsibility or liability whatsoever for any use made of this document other than by the client "Mr & Mrs Shea" for the purposes it was originally commissioned and prepared. All comments and opinions made are based upon information available to "Ellingham Consulting Ltd" during the necessary investigative process, and the conclusions and recommendations, could therefore, differ in the event of material subsequently being found erroneous, incomplete, or misleading. "Ellingham Consulting Ltd" therefore, accepts no liability should this prove to be the case.

1.0 INTRODUCTION

This Flood Risk Assessment has been prepared in accordance with National Planning Policy Framework (NPPF) and supporting planning practice guidance (PPG) on Flood Risk and Coastal Change.

In areas at risk of flooding or for sites of 1 hectare or more, developers are required to undertake a site-specific Flood Risk Assessment to accompany an application for planning permission. This Flood Risk Assessment has been produced on behalf of Mr & Mrs Shea in respect of a development that consists of a dwelling at Low Gate, Tydd St Mary.

A planning application for the proposed development is to be submitted by Swann Edwards Architecture.

2.0 SITE LOCATION AND DESCRIPTION

2.1 Site Location

The site is located at The Meadows, Low Gate, Tydd St Mary, Wisbech, PE13 5QP. The National Grid Reference of the site is 54371/31857.

The location of the site is shown in Figure 1.



Figure 1 – Location Plan (© OpenStreetMap contributors)

2.2 Existing Site

The site is on the western side of Low Gate. The site is within the curtilage of a residential dwelling. The site consists of part of the garden. The site is surrounded by residential dwellings. The area of development is approximately 0.05 hectares.

Ground level within the site are typically between +2.5m OD and +2.6m OD. The carriageway level of Low Gate alongside the site is +2.4m OD.

The site is in the North Level Internal Drainage Board (IDB) District. Surface water at the site would naturally drain through soakaway and hence to the IDB drainage system. An IDB Watercourse, School Drain, forms the northern boundary of The Meadows.

The online British Geological Survey maps indicate that the site is likely to be underlain by Ampthill Clay Formation mudstone. The bedrock is shown to be overlain with superficial deposits of clay and silt.

2.3 Proposed Development

The proposed development consists of one dwelling. The dwelling will be a chalet bungalow with bedrooms at first floor. The Site Plan is provided in Attachment 1.

2.4 Local Development Documents

The South East Lincolnshire Local Plan 2011 – 2036, adopted in March 2019, is the Local Plan for the district. Policy 4: Approach to Flood Risk states the requirements for flood risk reduction.

The South East Lincolnshire Level 1 and Level 2 Strategic Flood Risk Assessment (SFRA) was prepared in June 2017.

The Joint Lincolnshire Flood Risk and Drainage Management Strategy has been prepared by Lincolnshire County Council as the Lead Local Flood Authority. The purpose of the Strategy is to increase the safety of people across Lincolnshire by reducing the number of people at risk of flooding, increasing the resilience of local communities, and reducing the impact of flooding.

2.5 Flood Zones

An extract from the Environment Agency Flood Map for Planning is shown in Figure 2. The site is located in Flood Zone 3, an area with a high probability of flooding.

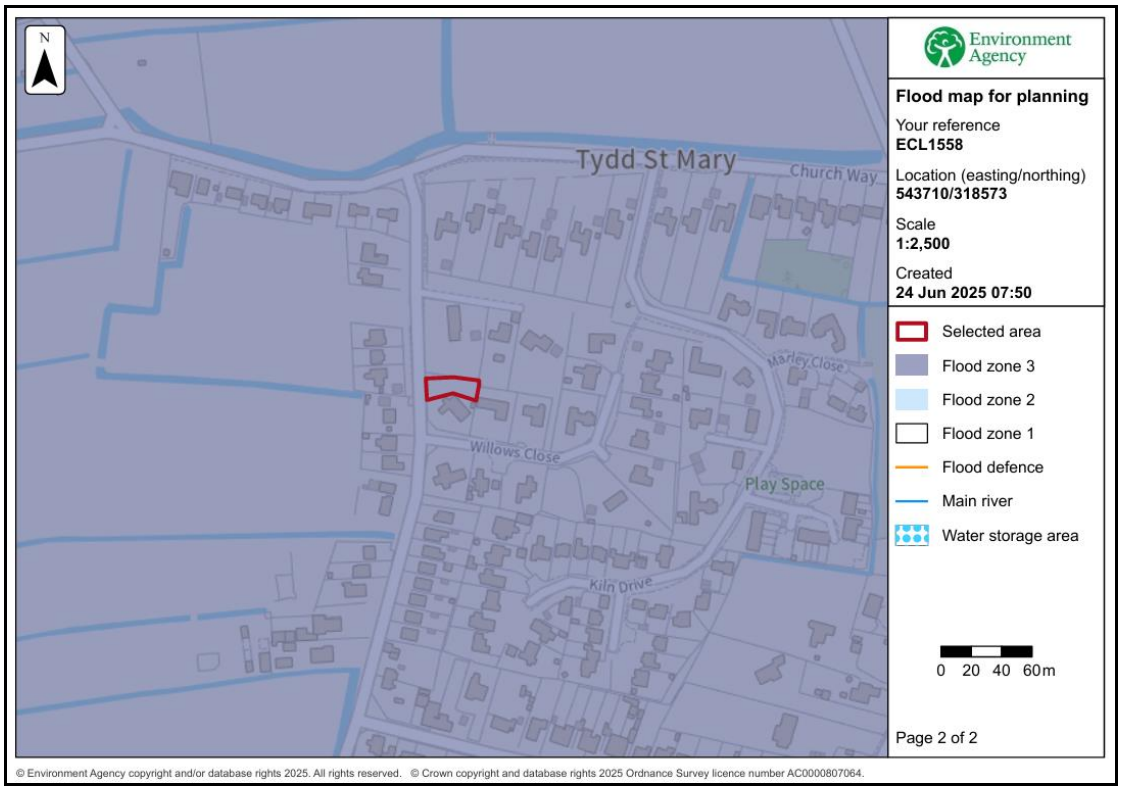


Figure 2 – Environment Agency Flood Map for Planning

The Environment Agency Long Term Flood Risk maps provide an indication of the risk from the primary sources of flooding. The details provided with these maps are summarised in Table 1. The depth of flooding identified is the maximum depth that occurs during a low chance (between 0.1% and 1% chance each year) event.

	Present Day		2050 Epoch	
	Risk of Flooding	**Depth (Low chance)**	**Risk of Flooding**	**Depth (Low chance)**
Rivers and the Sea	The site has a low chance (between 0.1% and 1% chance each year)	No data available	No data available	No data available
Surface Water	The site is outside the area with a low risk (between 0.1% and 1% chance each year)	Not at risk	The site is outside the area with a low risk (between 0.1% and 1% chance each year)	Not at risk
Reservoir	Outside of the area at risk.			

Table 1 – Environment Agency Long Term Flood Risk Maps

Table 2 shows the level of risk at the site identified on the tidal hazard mapping and tidal depth mapping within the South East Lincolnshire SFRA.

SFRA Map	Present Day	2115
Residual Flood Hazard Map for the 1% fluvial and 0.5% tidal event	The site is in a 'Danger for Some' area	The site is in a 'Danger for Some' area
Residual Peak Depth Map for the 1% fluvial and 0.5% tidal event	The maximum breach depth is 0.0m – 0.25m	The maximum breach depth is 0.0m – 0.25m

Table 2 – Flood Risk within SFRA Maps

Flood risk information provided by the Environment Agency that is specific to a nearby site is provided in Attachment 2.

3.0 FLOOD RISK VULNERABILITY

3.1 The Sequential and Exception Test

The NPPF requires the application of a Sequential Test to ensure that new development is in areas with the lowest probability of flooding.

The Exception Test is a method to demonstrate and help ensure that flood risk to people and property will be managed, while allowing necessary development to go ahead in situations where suitable sites at lower risk of flooding are not available.

3.2 Vulnerability Classification

Table 2 of the PPG Flood Risk and Coastal Change categorises different types of uses and development according to their vulnerability to flood risk. The proposed development is covered by the description of buildings used for dwellings and is classified as 'More Vulnerable'.

Table 3 of the PPG Flood Risk and Coastal Change sets out Flood Risk Vulnerability and flood zone 'compatibility'. The site is in Flood Zone 3 and the development is 'More Vulnerable' therefore it is necessary to complete the Exception Test.

PPG Flood Risk and Coastal Change defines that the lifetime of the development in terms of flood risk and coastal change is 100 years.

3.3 Application of the Sequential Test and Exception Test

It is for the Local Planning Authority, using the evidence provided and taking advice from the Environment Agency as appropriate, to consider whether an application passes the Sequential Test.

Large parts of the South Holland district between the River Welland and River Nene lie within Flood Zone 2 or Flood Zone 3. The River Nene and River Welland have defences that provide protection during the 0.5% annual probability (1 in 200 chance each year) event and therefore the 'actual risk' of flooding at the site is low.

The entire settlement of Tydd St Mary is within Flood Zone 3. The sites within Tydd St Mary that are identified in the Local Plan are within Flood Zone 3 and at reach during a tidal breach. Based upon the level of risk at alternative site within the settlement the site is considered to pass the Sequential Test.

The Exception Test requires consideration of the wider sustainability benefits of a development and that the development would be safe and residual risks managed.

The Local Plan has a target of a net increase of at least 11,681 dwellings in South Holland over the 25-year local plan period. The Plan considers this new housing is required to ensure the sustainability of the Local Plan area. The proposed development will contribute to this target.

Section 5 of this Flood Risk Assessment describes the flood mitigation measures and the management of the residual risks, demonstrating that this development will be safe and not increase flood risk elsewhere. The development is considered to pass the Exception Test.

4.0 SITE SPECIFIC FLOOD RISK

4.1 Local Flood Assets

The site is 3.2km west of the tidal River Nene. The site is protected by the River Nene tidal defences between Wisbech and Sutton Bridge. The River Nene is a main river and the responsibility of the Environment Agency.

There is a long-term strategy for the maintenance of the Environment Agency defences which is reviewed and updated periodically.

There is an extensive local drainage network managed by North Level IDB. The site and the surrounding land are within the Tydd Catchment and drain to the School Drain which discharges to the North Level Main Drain.

The site is approximately 1.5km north west of the North Level Main Drain, an embanked channel which flows to Tydd Pumping Station to discharge to the tidal River Nene.

During the operation and maintenance of its pumping stations, associated structures and channel systems, the IDB seeks to maintain a general standard capable of providing flood protection to its district. A routine maintenance programme is in place to ensure that the Boards assets are commensurate with the standard of protection that is sought.

Current maintenance standards of the North Level Internal Drainage Board and the Environment Agency are generally good.

4.2 Sources of Flooding

A summary of the sources of flooding is provided in Table 3.

Source of Flooding	Level of Risk
Drainage Network Flooding	The risk is assessed in Section 4.3.
Surface Water Flooding	Based upon the EA maps the risk is very low.
Fluvial Flooding	The risk is assessed in Section 4.3 and 4.5.
Tidal Flooding	The risk is assessed in Section 4.3, 4.5 and 4.6.
Reservoir / Breach Flooding	Based upon the EA maps the site is not at risk of flooding from reservoirs.
Groundwater Flooding	There is no evidence to suggest the site is at risk of groundwater flooding.

Table 3 – Sources of Flooding

4.3 Probability of Flooding

The probability of flooding associated with blockages in the North Level IDB drainage system is low due to the maintenance standards achieved and managed by the IDB.

Through the operation and maintenance of the pumping stations and the channel system the Board seek to maintain a general standard capable to providing flood protection to agricultural land and developed areas of 1 in 20 years and 1 in 100 years, respectively. The risk associated with flood events that exceed the standard of protection provided is lowered due to the North Level IDB main drains incorporating freeboard. This freeboard provides storage during the exceedance events.

The maximum flood level in the North Level Main Drain is -1.35m OD and therefore the site is not at risk from this watercourse.

The site benefits from defences on the River Nene that provide protection during a 0.5% annual probability (1 in 200 chance each year) tidal event and a 1% annual probability (1 in 100 chance each year) fluvial event. The defences consist of earth embankments with a riverside berm. The River Nene tidal defences between Sutton Bridge and Wisbech were improved after the 1978 tidal surge event to a level of 7.00m AOD. The tidal surge of 5 December 2013 reached a level of +6.10m OD at Wisbech Town Bridge.

4.4 Historic Flooding

During the preparation of this assessment, no evidence was discovered of the site being flooded.

4.5 Climate Change

Climate change is likely to impact the site through increased rainfall intensity and duration affecting the local drainage network and increased flood levels in the River Nene.

The River Nene tidal defences have been designed to include an allowance for climate change.

In summary the existing systems and defences are appropriate for the design life of the development (i.e., 100 years).

4.6 Residual Risk

The Tidal Hazard Mapping shows that there is a residual risk to the site should there be a breach of the tidal defences. An extract from the tidal hazard map indicating the flood depth during the 0.5% (1 in 200 chance each year) event in 2116 is shown in Figure 3.

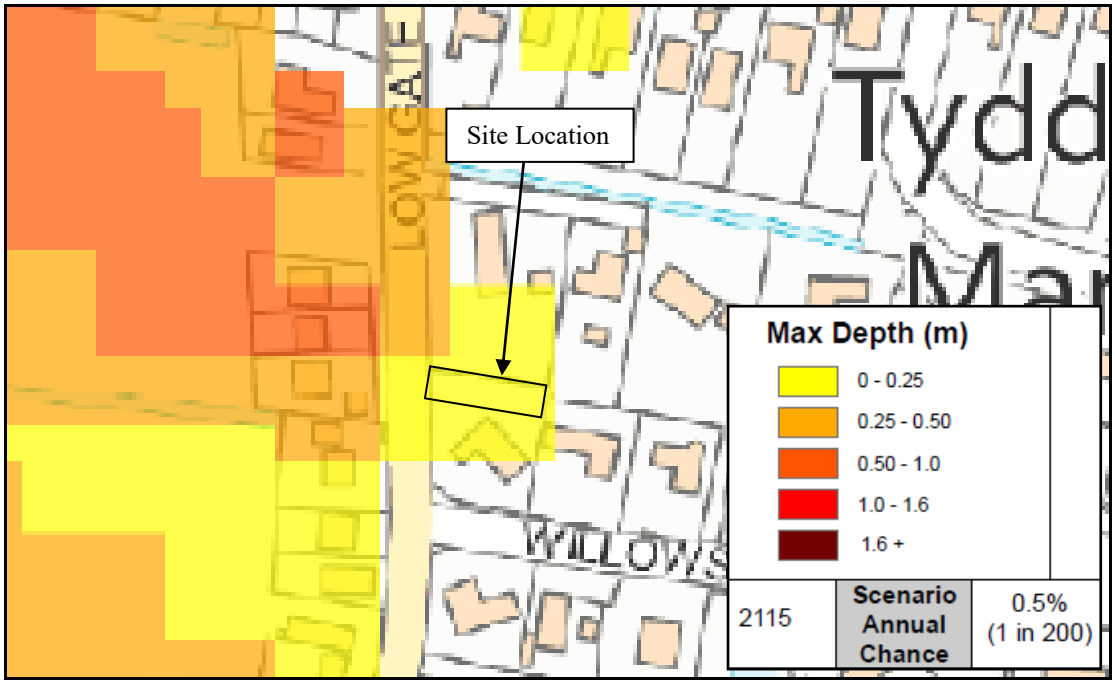


Figure 3 –2116 Residual Peak Depth Map (0.5% annual probability)

Figure 3 shows that the maximum breach depth at the site is between 0.0m and 0.25m.

5.0 FLOOD RISK MITIGATION

5.1 Summary of Risks

The probability of this development flooding from localised drainage systems is low. Failure of Tydd Pumping Station could lead to an increased level of risk within the IDB catchment.

The probability of the site flooding from any Environment Agency system is less than 1% annual probability (1 in 100 chance each year) because of the standards of the existing flood defences. Over time there will be a gradual increase in risk to the site due to climate change. During the design life of the development it is not anticipated that the site would flood.

There is a residual risk to the site in associated with a breach in the tidal defences. During the 0.5% annual probability (1 in 200 chance each year) event in 2116 the maximum breach flood depth is between 0.0m and 0.25m.

The proposed development increases the impermeable area and therefore has the potential to increase the rate of surface water runoff from the site.

5.2 Mitigation Measures

The site has a low 'actual risk' of flooding. It is recommended that the floor level of the dwelling is 0.3m above typical ground level with 0.3m of flood resilient (recovery) construction above finished floor level.

The developer should ensure that the eventual occupier of the dwelling is sufficiently aware of the risk of flooding, and the standard of the existing defences. The Environment Agency operates a flood warning system for properties at risk of flooding to enable householders to protect life or take actions to manage the effect of flooding on property. Floodline Warnings Service is a national system run by the Environment Agency for broadcasting flooding warnings. The occupier of the dwelling should register to receive flood warnings.

Should there be a failure of Tydd Pumping Station and conditions were such to put properties and land at risk of flooding, the Internal Drainage Board would take emergency action to maintain the drainage level of service by using temporary pumping equipment.

It is recommended that surface water run-off is managed so that stormwater from the development will not increase the flood risk elsewhere.

6.0 CONCLUSIONS

As a result of the assessment, the following conclusions have been reached.

- The proposed development consists of a chalet bungalow at The Meadows, Low Gate, Tydd St Mary.

- The site is located within an Internal Drainage Board catchment and through the operation and maintenance of the pumping stations and the channel system the Board seek to maintain a general standard capable to providing flood protection to agricultural land and developed areas of 1 in 20 and 1 in 100 years, respectively.

- The proposed development is in Flood Zone 3. The site benefits from defences on the tidal River Nene that provide protection during the 0.5% annual probability (1 in 200 chance each year) tidal event including climate change.

- The site is at risk during a breach of the tidal flood defences with a maximum flood depth of between 0.0m and 0.25m.

- It is recommended that the finished floor level of the dwelling is 0.3m above surrounding ground levels and there is 0.3m of flood resilient (recovery) construction above finished floor level.

- The development passes the Sequential Test and Exception Test and is therefore suitable for the proposed location.

ATTACHMENT 1

SITE AND LOCATION PLAN
(DWG SE-2323 PP1000)



Location Plan
Scale: 1:2500

0 12.5 25 37.5 50
metres



Indicative Site Plan
Scale: 1:500

0 5 10 15 20
metres

General Notes

1. All dimensions are shown in 'mm' unless otherwise stated.
2. The contractor, sub-contractors and suppliers must verify all dimensions on site prior to the commencement of any work.
3. This drawing is to be read in conjunction with all relevant engineers and specialist sub-contractors drawings and specifications.
4. Any discrepancies are to be brought to the designers attention.
5. This drawing shall not be scaled, figured dimensions only to be used.

SITE PLAN KEY

- Indicates trees and hedges
- Approximate location of tree root protection areas
- Indicates neighboring properties (from ordinance survey location plan)
- Indicates host property
- Indicates Site Boundary
- Indicates site access points
- Indicates potential location of new dwelling

Status

PLANNING

SWANN EDWARDS ARCHITECTURE
PART OF Collective BUILT ENVIRONMENT COLLECTIVE

Swann Edwards Architecture Limited, Black Barn, Fen Road, Guyhirn, Wisbech, Cambs, PE13 4AA
t 01945 450694 e info@swannedwards.co.uk w www.swannedwards.co.uk

Job Title
Proposed New Dwelling
Alfas, Low Gate
Tydd St Mary
for MMrs Shea

Date: June 2025
Drawn by: RS
Checked by: SP

Drawing Title
Outline Planning Drawing
Site and Location Plans

Job No.: SE-2323
Dwg No.: PP1000
Sheet Size: A1
Revision:

Swann Edwards Architecture Limited ©

ATTACHMENT 2

ENVIRONMENT AGENCY
FLOOD RISK ASSESSMENT DATA

Tim Ellingham
tim@ellinghamconsulting.co.uk

Our ref: CCN-2022-282520

Date: 24/10/2022

Dear Tim,

Provision of Flood Risk Information for Lowgate, Tydd St Mary

Thank you for your request for our flood risk information for the above site. The information is set out below and attached. It is important you read any contextual notes on the maps provided.

If you are preparing a Flood Risk Assessment (FRA) for this site, please note this information may not be sufficient by itself to produce an adequate FRA to demonstrate the development is safe over its lifetime. Additional information may be required to carry out an appropriate assessment of all risk, such as consequence of a breach in defences.

We aim to review our information on a regular basis, so if you are using this data more than twelve months from the date of this letter, please contact us again to check it is still valid.

1. Flood Map

The attached map includes the current Flood Map for your area. The Flood Map indicates the area at risk of flooding, **assuming no flood defences exist**, for a flood with a 0.5% chance of occurring in any year for flooding from the sea, or a 1% chance of occurring for fluvial (river) flooding. It also shows the extent of the Extreme Flood Outline which represents the extent of a flood with a 0.1% chance of occurring in any year, or the highest recorded historic extent if greater.

In some locations, such as around the fens and the large coastal floodplains, showing the area at risk of flooding assuming no defences may give a slightly misleading picture in that if there were no flood defences, water would spread out across these large floodplains. This flooding could cover large areas of land but to relatively shallow depths and could leave pockets of locally slightly higher land as isolated dry islands. It is important to understand the actual risk of the flooding to these dry islands, particularly in the event of defence failure.

The Flood Map also shows the location of formal raised flood defences and flood storage reservoirs. It represents areas at risk of flooding for present day only and does not take account of climate change.

The Flood Map only indicates the extent and likelihood of flooding from rivers or the sea. It should also be remembered flooding may occur from other sources such as surface water sewers, road drainage, etc.

2. Historic Flood Event Outlines

With regards to the history of flooding I can advise we do not have any records of flooding in this area. It is possible recent flooding may have occurred which we are currently investigating, therefore this information may be subject to change. It is possible other flooding may have occurred which other risk management authorities, such as the Lead Local Flood Authority (i.e. top tier council) or Internal Drainage Board (where they exist) have responsibility.

3. Schemes in the area

There are no ongoing capital projects to reduce or sustain the current flood risk to this site.

4. Fluvial Flood Risk Information

This site is not considered to be at risk of flooding from main rivers.

The site may be at risk from local ordinary watercourses for which other risk management authorities, such as the Lead Local Flood Authority (i.e. top tier council) or Internal Drainage Board (where they exist) have responsibility.

5. Tidal Flood Risk Information

5.1 Tidal Defence Information

The existing tidal defences protecting this site consist of earth embankments.

They are in fair condition and reduce the risk of flooding (at the defence) to a 0.67% (1 in 150) chance of occurring in any year. We inspect these defences routinely to ensure potential defects are identified.

Refer to paragraph 3 for details of any ongoing capital projects to reduce the flood risk to this site.

5.2 Tidal Flood Levels

The attached data sheets show our current best estimate for extreme tide levels.

Please read the information notes on the data sheets.

5.3 Tidal Hazard Mapping

For certain locations we have carried out modelling to map the maximum values of flood depth, velocity and hazard rating (danger to people) resulting from overtopping and / or breaching of defences at specific locations for a number of scenarios.

At present this information is available along the full coastal / tidal floodplain, except the tidal Witham Haven in Boston (upstream of Hobhole) where only breaching and not overtopping has been modelled and the tidal River Welland upstream of Fosdyke Bridge where neither breaching nor overtopping are available.

The number of locations we have this information for is expected to increase in time.

The attached maps show the maximum values of flood depth, velocity and hazard rating (danger to people) resulting from breaching of the defences at specific locations for the scenarios below. For some locations the breach mapping also includes flooding from overtopping if this is expected in that scenario. The location of modelled tidal breaches is shown on a separate attached map.

5.3.1 Tidal Hazard Mapping - Breaches

- Year 2006 0.5% (1 in 200) chance
- Year 2006 0.1% (1 in 1000) chance
- Year 2115 0.5% (1 in 200) chance
- Year 2115 0.1% (1 in 1000) chance

5.3.2 Tidal Hazard Mapping - Overtopping

Your site is not affected by overtopping of the defences for the present day (2006) and climate change (2115) scenarios.

6. Development Planning

If you would like local guidance on preparing a flood risk assessment for a planning application, please contact our Sustainable Places team at LNplanning@environment-agency.gov.uk. It will help if you mention this data request and attach your site location plan.

We provide free preliminary advice; additional/detailed advice, review of draft FRAs and meetings are chargeable at a rate set to cover our costs, currently £100 (plus VAT) per hour of staff time. Further details are available on our website at https://www.gov.uk/guidance/developers-get-environmental-advice-on-your-planning-proposals.

General advice on flood risk assessment for planning applications can be found on GOV.UK at https://www.gov.uk/guidance/flood-risk-assessment-for-planning-applications

Climate change will increase flood risk due to overtopping of defences. Please note, unless specified otherwise, the climate change data included has an allowance for 20% increase in flow. Updated guidance on how climate change could affect flood risk to new development - 'Flood risk assessments: climate change allowances' was published on GOV.UK in **July 2021**. The appropriate updated climate change allowance should be applied in a Flood Risk Assessment.

You should also consult the Strategic Flood Risk Assessment produced by your local planning authority.

7. Data Licence and Other Supporting Information

We respond to requests for recorded information we hold under the Freedom of Information Act 2000 (FOIA) and the associated Environmental Information Regulations 2004 (EIR).

This information is provided in accordance with the Open Government Licence which can be found here: http://www.nationalarchives.gov.uk/doc/open-government-licence/version/3/

Further information on flood risk can be found on the GOV.UK website at:
https://www.gov.uk/browse/environment-countryside/flooding-extreme-weather

8. Other Flood Risk Management Authorities

The information provided with this letter relates to flood risk from main river or the sea. Additional information may be available from other risk management authorities, such as the Lead Local Flood Authority (i.e. top tier council) or Internal Drainage Board (where they exist).

I hope we have correctly interpreted your request. If you have any queries or would like to discuss the content of this letter further please contact Alexander Tan using the email address below and quoting our CCN reference number above.


Yours sincerely,



for Alastair Windler
Welland and Nene Partnerships and Strategic Overview Team Leader
e-mail PSOWN@environment-agency.gov.uk

Enc.
Flood Map
Tidal Level Data Sheets - Map and Tables
Tidal Breach Points – Locations Map
Hazard Mapping – Breaching

Flood Map centred on TF 43581 18636 - created October 2022 [Ref: CCN-2022-282520]

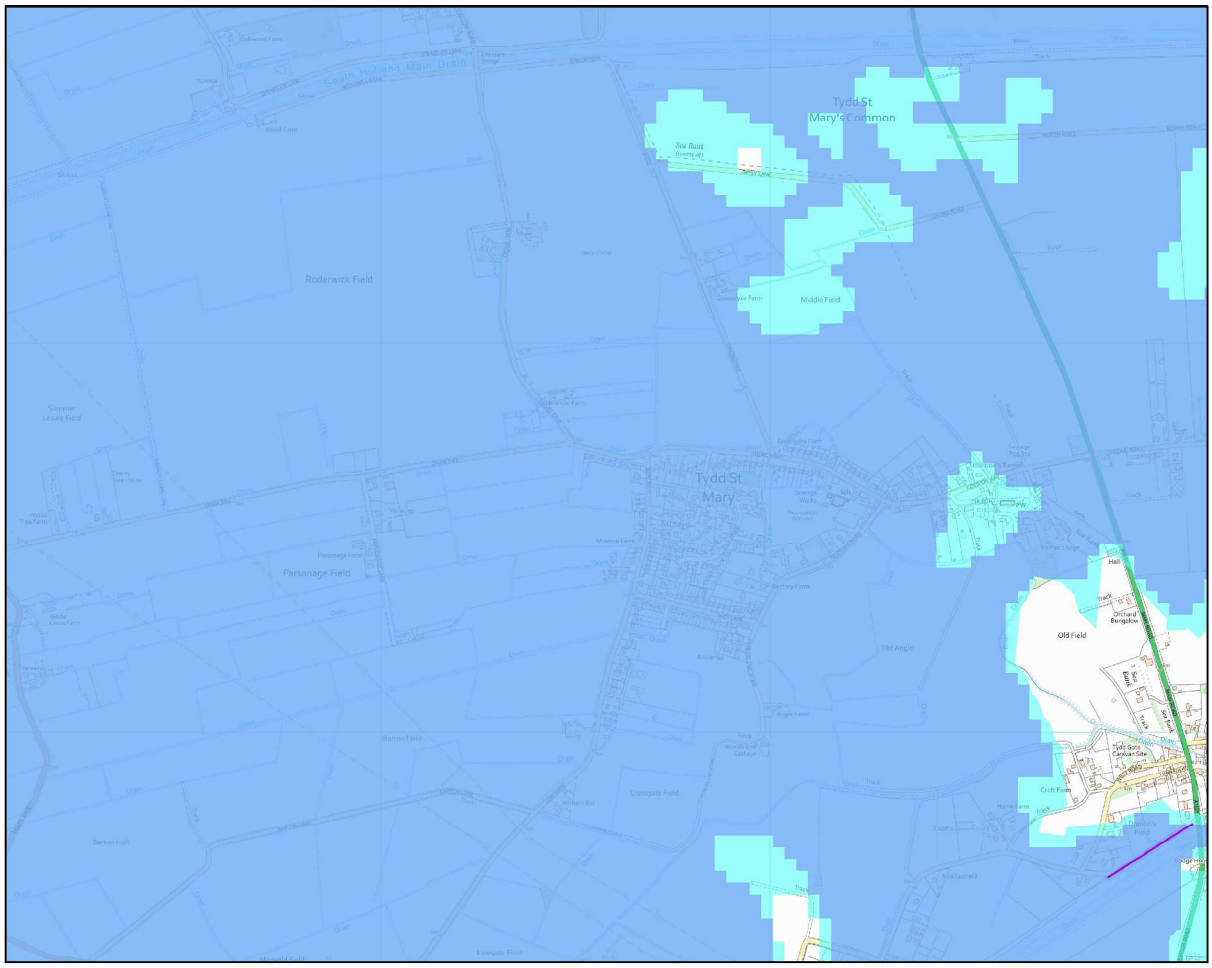

Environment Agency

Scale 1:10,000

N

Legend

- Main Rivers
- Raised Defences
- Flood Storage Areas
- Areas at Risk of Flooding from Rivers or the Sea
- Extreme Flood Outline

Dark blue shows the area that could be affected by flooding, either from rivers or the sea, if there were no flood defences. This area could be flooded:

- from the sea by a flood that has a 0.5% (1 in 200) or greater chance of happening each year.

- or from a river by a flood that has a 1% (1 in 100) or greater chance of happening each year.

Light blue shows the extent of the Extreme Flood Outline, which represents the extent of a flood event with a 0.1% chance of occurring in any year, or the highest recorded historic extent if greater.


These two colours show the extent of the natural floodplain if there were no flood defences or certain other manmade structures and channel improvements. Sites outside the two extents, but behind raised defences, may be affected by flooding if the defences are overtopped or fail.

Created by the Partnerships and Strategic Overview Team, Kettering

© Environment Agency copyright and / or database rights 2022. All rights reserved. © Crown Copyright and database right. All rights reserved. Environment Agency,100024198, 2022.

Contact Us: National Customer Contact Centre, PO Box 544, Rotherham, S60 1BY. Tel: 03708 506 506 (Mon-Fri 8-6). Email: enquiries@environment-agency.gov.uk

East Coast and Wash - 2018 Coastal Flood Boundary [CFB] Dataset
Key Node Points

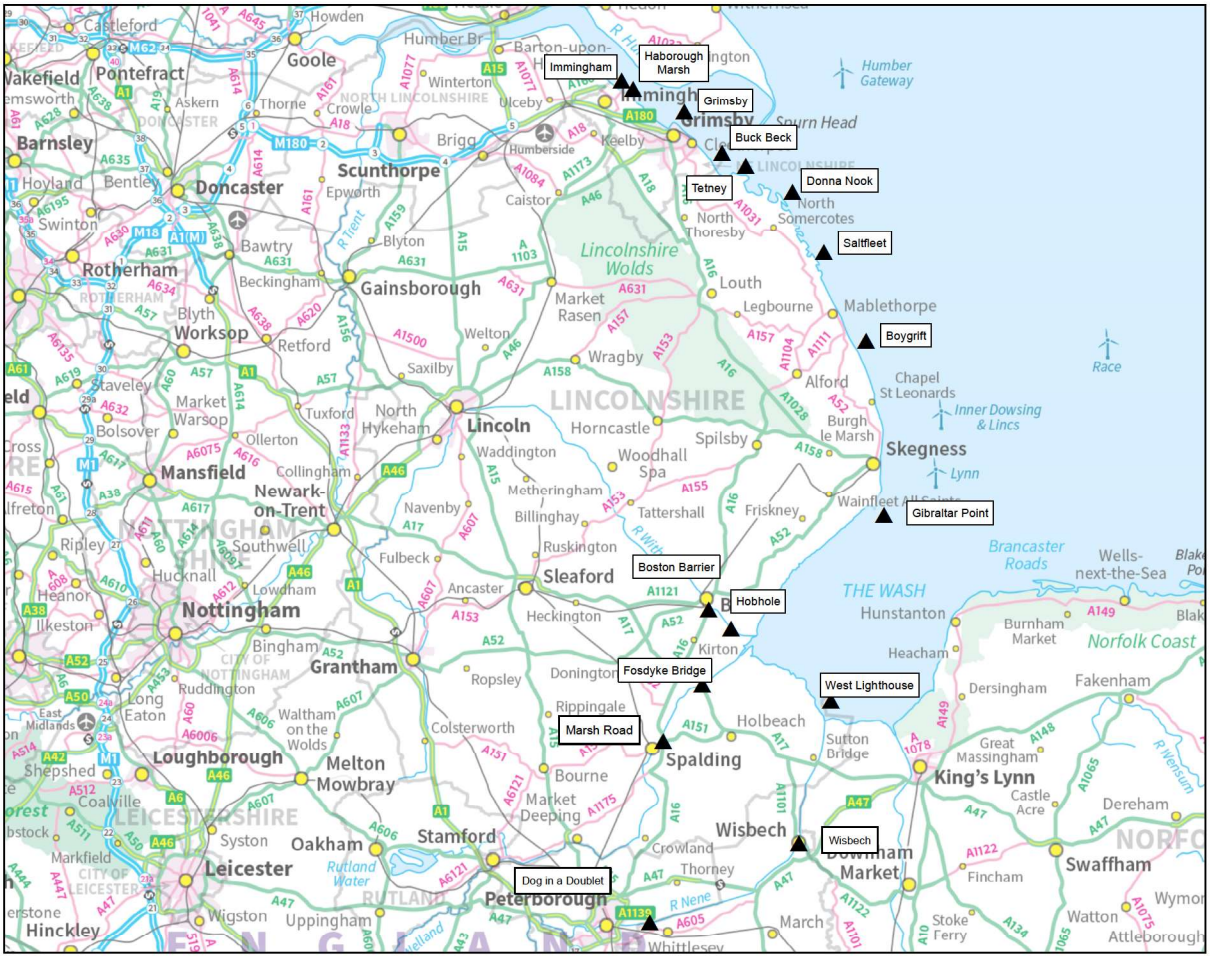

Environment Agency

Scale 1:550,000

N W E S

▲ East Coast and Wash

See seperate data sheet for predicted flood levels

Created by the Partnerships and Strategic Overview Team, Lincoln

© Environment Agency copyright and / or database rights 2022. All rights reserved. © Crown Copyright and database rights 2022 Ordnance Survey 100024198.

Contact Us: National Customer Contact Centre, PO Box 544, Rotherham, S60 1BY. Tel: 03708 506 506 (Mon-Fri 8-6). Email: enquiries@environment-agency.gov.uk

East Coast and Wash: Immingham to the West Lighthouse

2018 Coastal Flood Boundary Extreme Sea Levels

CFB Ref	Location	Easting	Northing	Annual Chance (1 in x) of Tide Level in metres ODN																				
				1			10			50			100			200			300			1000		
				Confidence Bound			Confidence Bound			Confidence Bound			Confidence Bound			Confidence Bound			Confidence Bound			Confidence Bound		
				2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%	2.5%	50%	97.5%
3888	Immingham	520440	417625	4.16	4.17	4.19	4.50	4.53	4.62	4.73	4.80	5.00	4.83	4.93	5.19	4.93	5.06	5.41	4.98	5.14	5.55	5.15	5.38	6.01
3890	Haborough Marsh	522100	416512	4.14	4.15	4.17	4.48	4.51	4.60	4.70	4.77	4.97	4.80	4.90	5.16	4.90	5.03	5.38	4.94	5.10	5.51	5.11	5.34	5.97
3898	Grimsby	529295	413162	3.98	3.99	4.01	4.31	4.34	4.43	4.53	4.60	4.80	4.61	4.71	4.97	4.71	4.84	5.19	4.74	4.90	5.31	4.88	5.11	5.74
3906	Buck Beck	534709	407369	3.87	3.88	3.90	4.19	4.23	4.31	4.41	4.50	4.68	4.50	4.61	4.86	4.61	4.75	5.10	4.64	4.82	5.22	4.80	5.05	5.66
3910	Tetney	538035	405537	3.85	3.86	3.89	4.17	4.22	4.30	4.40	4.50	4.67	4.49	4.61	4.86	4.60	4.75	5.10	4.63	4.82	5.21	4.80	5.06	5.66
3918	Donna Nook	544641	401997	3.82	3.83	3.86	4.14	4.19	4.27	4.38	4.48	4.65	4.47	4.60	4.85	4.58	4.74	5.10	4.63	4.82	5.22	4.81	5.08	5.68
3928	Saltfleet	549131	393360	3.78	3.79	3.82	4.11	4.16	4.26	4.36	4.46	4.64	4.47	4.59	4.86	4.57	4.74	5.11	4.63	4.83	5.25	4.83	5.11	5.74
3942	Boygrift	555131	380860	3.72	3.74	3.77	4.06	4.11	4.22	4.33	4.43	4.65	4.43	4.57	4.87	4.56	4.73	5.13	4.62	4.83	5.28	4.85	5.15	5.82
3968	Gibraltar Point	557652	356181	4.16	4.17	4.20	4.51	4.56	4.67	4.76	4.85	5.08	4.85	4.97	5.27	4.94	5.10	5.49	4.99	5.18	5.63	5.14	5.41	6.09
3992_14	Hobhole	535990	340116	4.96	4.97	5.01	5.40	5.44	5.56	5.66	5.76	5.98	5.78	5.90	6.20	5.88	6.04	6.44	5.92	6.11	6.57	6.03	6.31	6.99
	Grand Sluice*	532366	344510	4.93	4.94	4.98	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3
3992_9	Boston Barrier	532754	342852	4.93	4.94	4.98	5.41	5.45	5.57	5.73	5.83	6.05	5.85	5.97	6.27	5.93	6.09	6.49	5.94	6.13	6.59	5.98	6.26	6.94
3992_5	Fosdyke Bridge	531886	332234	4.87	4.88	4.92	5.31	5.35	5.47	5.58	5.68	5.90	5.71	5.83	6.13	5.82	5.98	6.38	5.87	6.06	6.52	6.01	6.29	6.97
4008	West Lighthouse	550094	329971	4.87	4.88	4.91	5.21	5.26	5.37	5.46	5.56	5.78	5.56	5.68	5.98	5.66	5.82	6.21	5.71	5.90	6.35	5.86	6.14	6.81
-	Marsh Road	525988	324065	-	5.04	-	-	5.44	-	-	5.73	-	-	5.85	-	-	5.98	-	-	-	-	-	-	-
-	Wisbech	546110	309940	-	4.83	-	-	5.25	-	-	5.53	-	-	5.66	-	-	5.78	-	-	-	-	-	-	-
-	Dog-in-a-Doublet	527200	299287	-	3.67	-	-	4.00	-	-	4.22	-	-	4.32	-	-	4.42	-	-	-	-	-	-	-

See next page for notes

Customer services line: 03708 506 506
Calls to 03 numbers cost the same as calls to standard geographic numbers
(i.e. numbers beginning with 01 or 02)

Email: enquiries@environment-agency.gov.uk
www.gov.uk/environment-agency

East Coast and Wash: Immingham to the West Lighthouse

2018 Coastal Flood Boundary Extreme Sea Levels

NOTES:

The following notes apply to all CFB sites (ie all on table excluding Marsh Road, Wisbech, Dog-in-a-Doublet)

- The base date for the data is 2017.
- The levels are still water levels. Depending on the use of the data it may be necessary to consider wave heights and / or joint probability analysis of water level and other variables.
- Levels for other annual chance probabilities are available if required.
- For additional information relating to the 2018 Coastal Flood Boundary Extreme Sea Levels or to access the full dataset for the above sites or intermediate locations refer to the Defra Metadata Catalogue at https://deframetadata.com/geonetwork/srv/eng/catalog.search#/metadata/84a5c7c0-d465-11e4-b0bd-f0def148f590

The following notes apply to all Marsh Road, Wisbech, Dog-in-a-Doublet

- The base date for the data is 2006
- The levels are still water levels. Depending on the use of the data it may be necessary to consider wave heights and / or joint probability analysis of water level and other variables.
- Levels for other annual chance probabilities are available if required.
- These levels will be updated as their respective tidal river models are updated.

The following notes apply to Grand Sluice

- The data is based on CFB 2018 data for Boston Barrier site, capped at 5.3mAOD to reflect use of the barrier.
- The base date for the data is 2017
- The levels are still water levels. Depending on the use of the data it may be necessary to consider wave heights and / or joint probability analysis of water level and other variables.
- For additional information relating to the 2018 Coastal Flood Boundary Extreme Sea Levels or to access the full dataset for the above sites or intermediate locations refer to the Defra Metadata Catalogue at https://deframetadata.com/geonetwork/srv/eng/catalog.search#/metadata/84a5c7c0-d465-11e4-b0bd-f0def148f590



★ **Modelled Breach Locations**

0 3.5 7 14 Kilometers

This map idicates the location of where we have modelled the consequence of breaches in the defences along the coastline and tidal rivers. We have mapped the maximum values of Hazard Rating (Danger to People), Depth and Velocity.

We have not assumed that all breaches occur at the same time, but have modelled each breach individually and overlaid the results to find the maximum values.

Our modelling only considers the consequences of a breach, it does not make any assumption about the likelihood of a breach occurring. Our defences generally provide a good standard of flood defence but a risk of breaching remains.

Please contact the Environment Agency for information on how these maps are used in the management of flood risk.

General Enquiries No: 03708 506 506.
Weekday calls cost 5p plus up to 6ppm from BT Weekend Unlimited. Mobile and other providers charges may vary.


Environment Agency


Produced by the Partnership and Strategic Overview Team, Lincoln
General Enquiries No: 03708 506 506


Northern Area Tidal Hazard Mapping

Location of Modelled Breaches

This map is reproduced by permission of Ordnance Survey on behalf of The Controller of Her Majesty's Stationary Office. Crown copyright. All rights reserved. Environment Agency 100024198, 2012
Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.

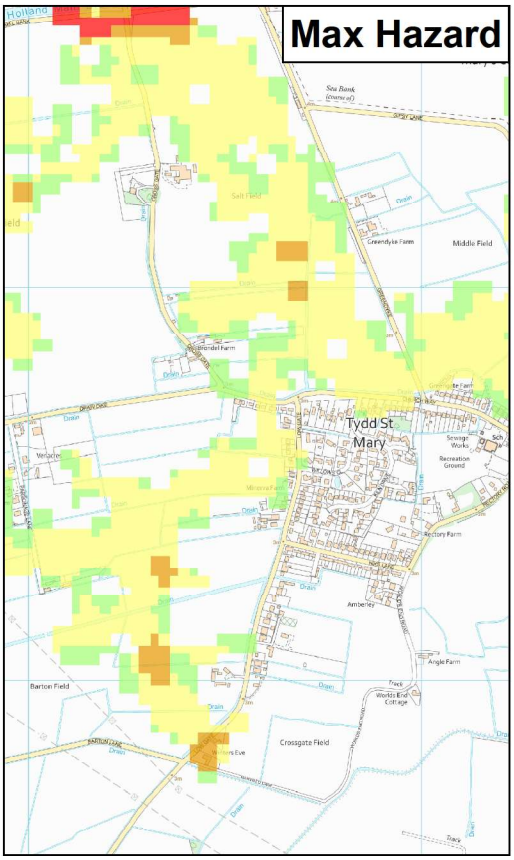

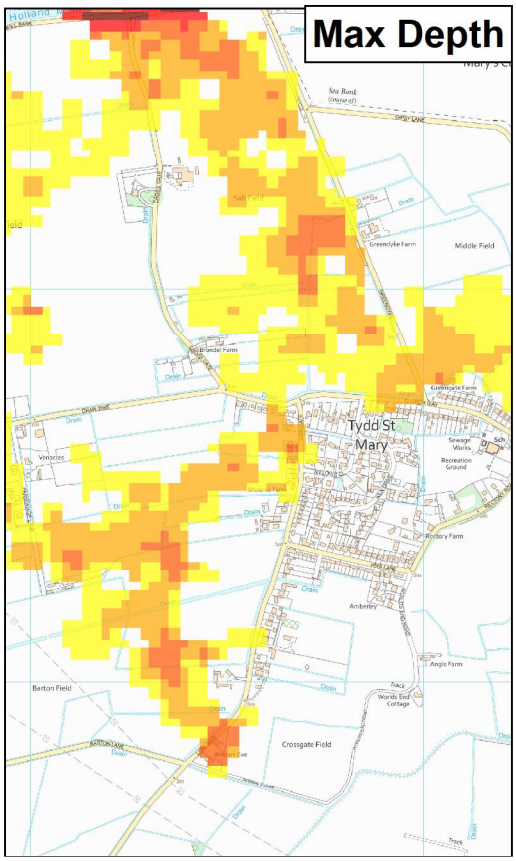

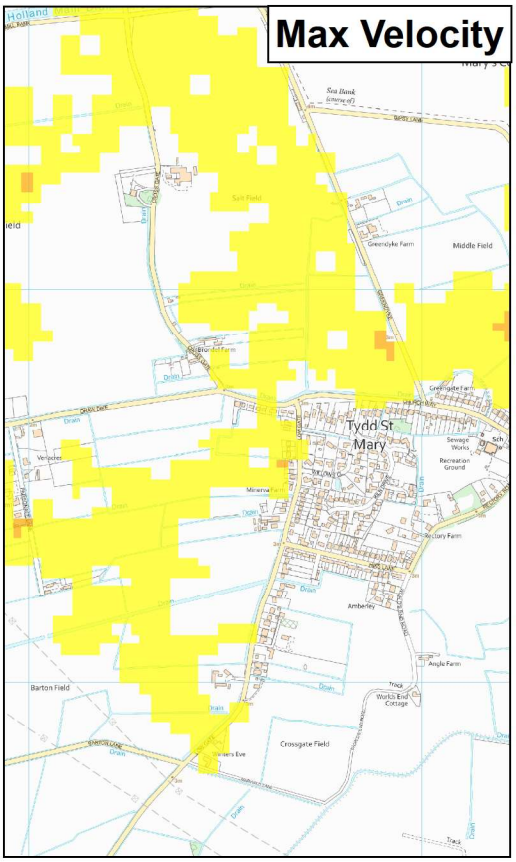

★ **Modelled Breach Locations** - see also the accompanying plan "Location of Modelled Breaches"

Max Hazard (Flood Risk to People : FD2320)	Max Depth (m)	Max Velocity (m/s)
Less than 0.75 (Low Hazard)	0 - 0.25	0 - 0.3
Between 0.75 and 1.25 (Danger for Some)	0.25 - 0.50	0.3 - 1.0
Between 1.25 and 2.0 (Danger for Most)	0.50 - 1.0	1.0 - 1.5
Greater than 2.0 (Danger for All)	1.0 - 1.6	1.5 - 2.5
	1.6 +	2.5 +

Date Printed	October 2022	Scenario year	2006	Scenario Annual Chance	0.5% (1 in 200)	CCN Number	CCN-2022-282520

This map shows the level of flood hazard to people (called a hazard rating) if our flood defences are breached at certain locations, for a range of scenarios. The hazard rating depends on the depth and velocity of floodwater, and maximum values of these are also mapped.

The map is based on computer modelling of simulated breaches at specific locations. Each breach has been modelled individually and the results combined to create this map. Multiple breaches, other combinations of breaches, different sized tidal surges or flood flows may all give different results.

The map only considers the consequences of a breach, it does not make any assumption about the likelihood of a breach occurring. The likelihood of a breach occurring will depend on a number of different factors, including the construction and condition of the defences in the area. A breach is less likely where defences are of a good standard, but a risk of breaching remains.


General Enquiries No: 03708 506 506. Weekday Daytime calls cost 5p plus up to 6p per minute from BT Weekend Unlimited. Mobile and other providers' charges may vary


Environment Agency


Lincolnshire and Northamptonshire Tidal Breaching Hazard Mapping

Map Centred on TF 43581 18636

This map is reproduced by permission of Ordnance Survey on behalf of The Controller of Her Majesty's Stationary Office. Crown copyright. All rights reserved. Environment Agency 100024198, 2022. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.

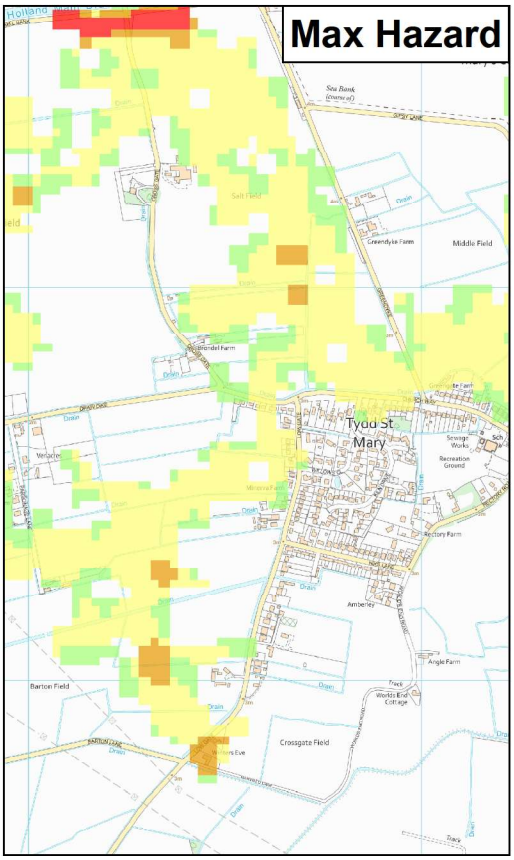

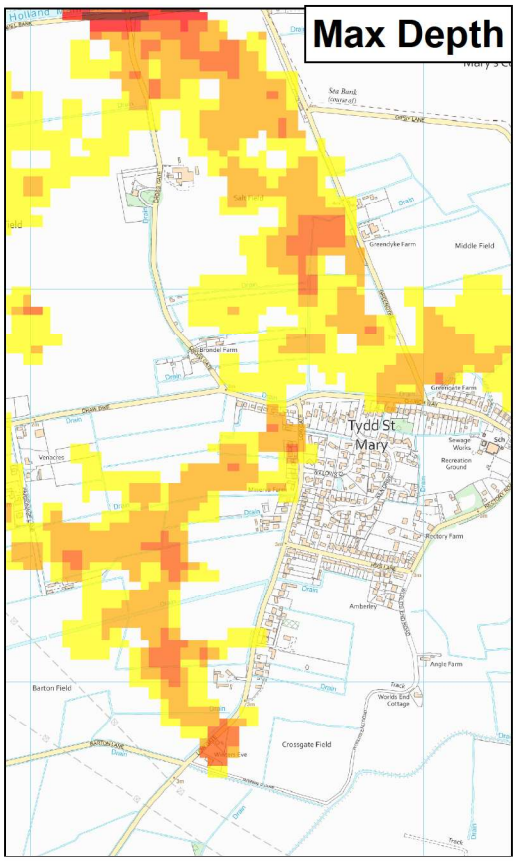

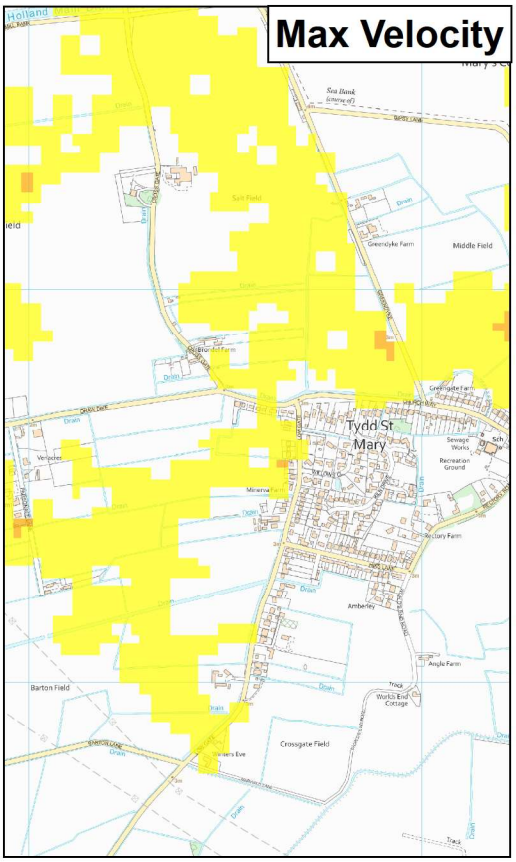

★ **Modelled Breach Locations** - see also the accompanying plan "Location of Modelled Breaches"

Max Hazard (Flood Risk to People : FD2320)	Max Depth (m)	Max Velocity (m/s)
Less than 0.75 (Low Hazard)	0 - 0.25	0 - 0.3
Between 0.75 and 1.25 (Danger for Some)	0.25 - 0.50	0.3 - 1.0
Between 1.25 and 2.0 (Danger for Most)	0.50 - 1.0	1.0 - 1.5
Greater than 2.0 (Danger for All)	1.0 - 1.6	1.5 - 2.5
	1.6 +	2.5 +

Date Printed	October 2022	Scenario year	2006	Scenario Annual Chance	0.1% (1 in 1000)	CCN Number	CCN-2022-282520

This map shows the level of flood hazard to people (called a hazard rating) if our flood defences are breached at certain locations, for a range of scenarios. The hazard rating depends on the depth and velocity of floodwater, and maximum values of these are also mapped.

The map is based on computer modelling of simulated breaches at specific locations. Each breach has been modelled individually and the results combined to create this map. Multiple breaches, other combinations of breaches, different sized tidal surges or flood flows may all give different results.

The map only considers the consequences of a breach, it does not make any assumption about the likelihood of a breach occurring. The likelihood of a breach occurring will depend on a number of different factors, including the construction and condition of the defences in the area. A breach is less likely where defences are of a good standard, but a risk of breaching remains.


General Enquiries No: 03708 506 506. Weekday Daytime calls cost 5p plus up to 6p per minute from BT Weekend Unlimited. Mobile and other providers' charges may vary


Environment Agency


Lincolnshire and Northamptonshire Tidal Breaching Hazard Mapping

Map Centred on TF 43581 18636

This map is reproduced by permission of Ordnance Survey on behalf of The Controller of Her Majesty's Stationary Office. Crown copyright. All rights reserved. Environment Agency 100024198, 2022. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.

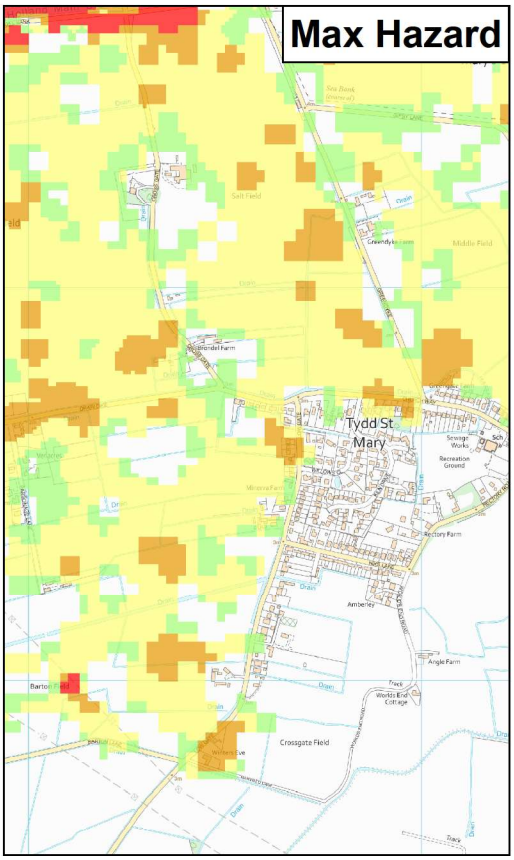

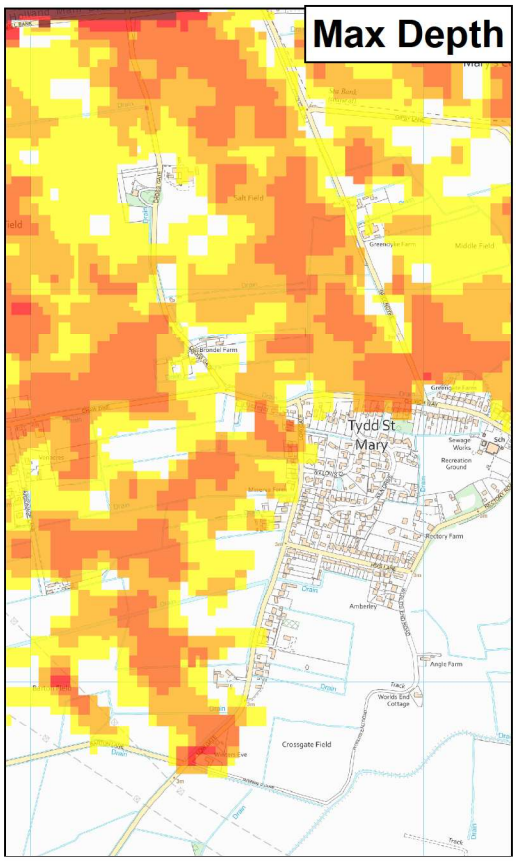

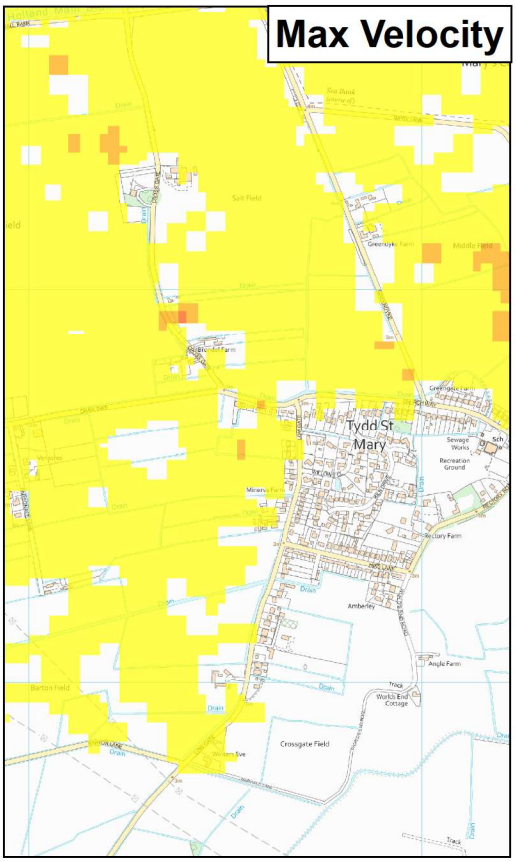

★ **Modelled Breach Locations** - see also the accompanying plan "Location of Modelled Breaches"

Max Hazard
(Flood Risk to People : FD2320)

- Less than 0.75 (Low Hazard)
- Between 0.75 and 1.25 (Danger for Some)
- Between 1.25 and 2.0 (Danger for Most)
- Greater than 2.0 (Danger for All)

Max Depth (m)

- 0 - 0.25
- 0.25 - 0.50
- 0.50 - 1.0
- 1.0 - 1.6
- 1.6 +

Max Velocity (m/s)

- 0 - 0.3
- 0.3 - 1.0
- 1.0 - 1.5
- 1.5 - 2.5
- 2.5 +

Date Printed	October 2022	Scenario year	2115	Scenario Annual Chance	0.5% (1 in 200)	CCN Number	CCN-2022-282520

This map shows the level of flood hazard to people (called a hazard rating) if our flood defences are breached at certain locations, for a range of scenarios. The hazard rating depends on the depth and velocity of floodwater, and maximum values of these are also mapped.

The map is based on computer modelling of simulated breaches at specific locations. Each breach has been modelled individually and the results combined to create this map. Multiple breaches, other combinations of breaches, different sized tidal surges or flood flows may all give different results.

The map only considers the consequences of a breach, it does not make any assumption about the likelihood of a breach occurring. The likelihood of a breach occurring will depend on a number of different factors, including the construction and condition of the defences in the area. A breach is less likely where defences are of a good standard, but a risk of breaching remains.


General Enquiries No: 03708 506 506. Weekday Daytime calls cost 5p plus up to 6p per minute from BT Weekend Unlimited. Mobile and other providers' charges may vary


Environment Agency


Lincolnshire and Northamptonshire Tidal Breaching Hazard Mapping

Map Centred on TF 43581 18636

This map is reproduced by permission of Ordnance Survey on behalf of The Controller of Her Majesty's Stationary Office. Crown copyright. All rights reserved. Environment Agency 100024198, 2022. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.

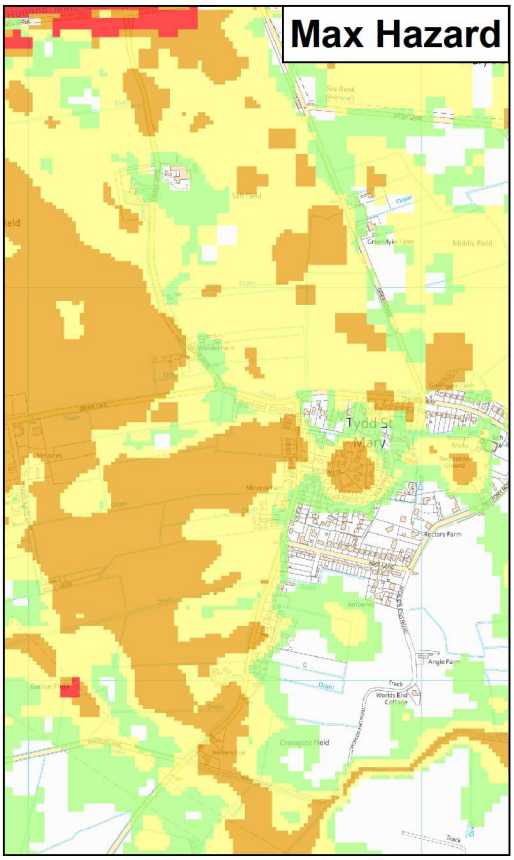

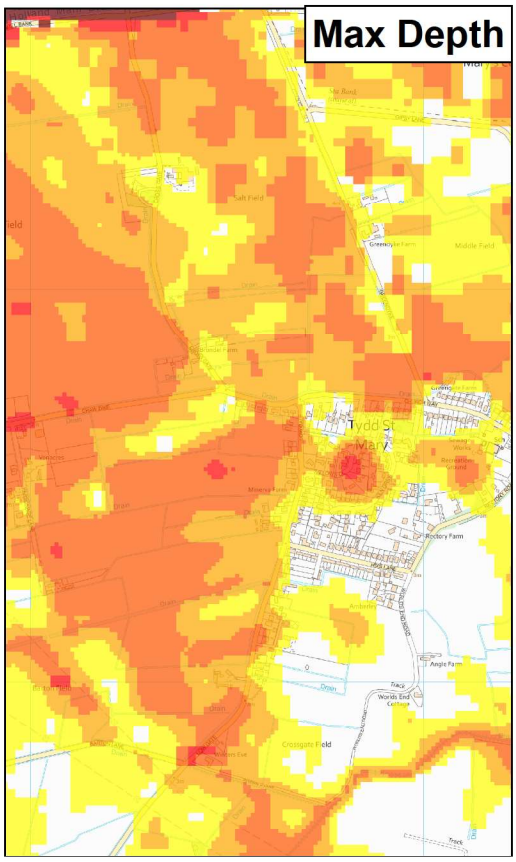

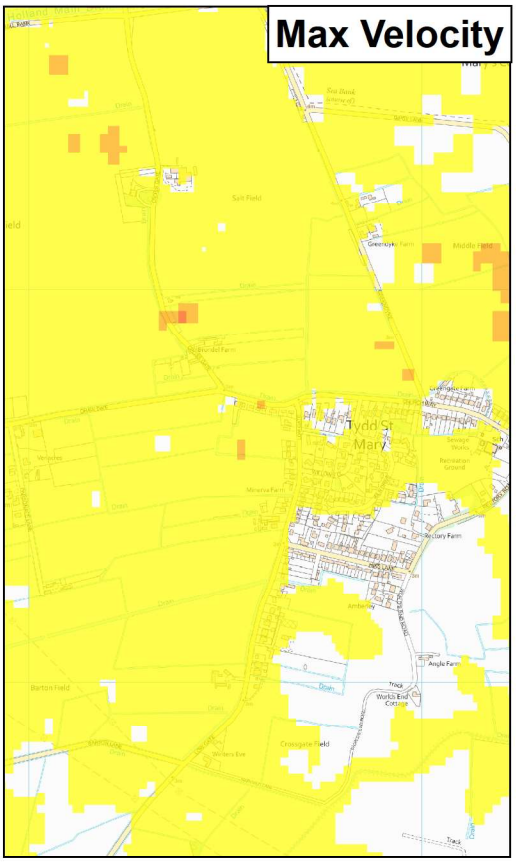

★ **Modelled Breach Locations** - see also the accompanying plan "Location of Modelled Breaches"

Max Hazard (Flood Risk to People : FD2320)	Max Depth (m)	Max Velocity (m/s)
Less than 0.75 (Low Hazard)	0 - 0.25	0 - 0.3
Between 0.75 and 1.25 (Danger for Some)	0.25 - 0.50	0.3 - 1.0
Between 1.25 and 2.0 (Danger for Most)	0.50 - 1.0	1.0 - 1.5
Greater than 2.0 (Danger for All)	1.0 - 1.6	1.5 - 2.5
	1.6 +	2.5 +

Date Printed	October 2022	Scenario year	2115	Scenario Annual Chance	0.1% (1 in 1000)	CCN Number	CCN-2022-282520

This map shows the level of flood hazard to people (called a hazard rating) if our flood defences are breached at certain locations, for a range of scenarios. The hazard rating depends on the depth and velocity of floodwater, and maximum values of these are also mapped.

The map is based on computer modelling of simulated breaches at specific locations. Each breach has been modelled individually and the results combined to create this map. Multiple breaches, other combinations of breaches, different sized tidal surges or flood flows may all give different results.

The map only considers the consequences of a breach, it does not make any assumption about the likelihood of a breach occurring. The likelihood of a breach occurring will depend on a number of different factors, including the construction and condition of the defences in the area. A breach is less likely where defences are of a good standard, but a risk of breaching remains.

General Enquiries No: 03708 506 506. Weekday Daytime calls cost 5p plus up to 6p per minute from BT Weekend Unlimited. Mobile and other providers' charges may vary

Environment Agency

Lincolnshire and Northamptonshire Tidal Breaching Hazard Mapping

Map Centred on TF 43581 18636

This map is reproduced by permission of Ordnance Survey on behalf of The Controller of Her Majesty's Stationary Office. Crown copyright. All rights reserved. Environment Agency 100024198, 2022. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.