



PROPOSED FRONT ELEVATION

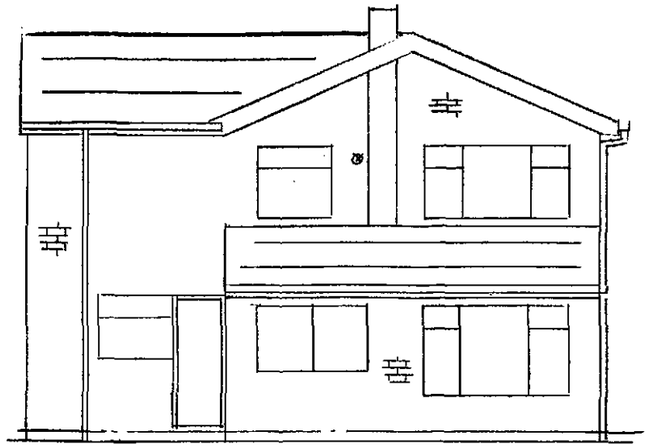


PROPOSED REAR ELEVATION

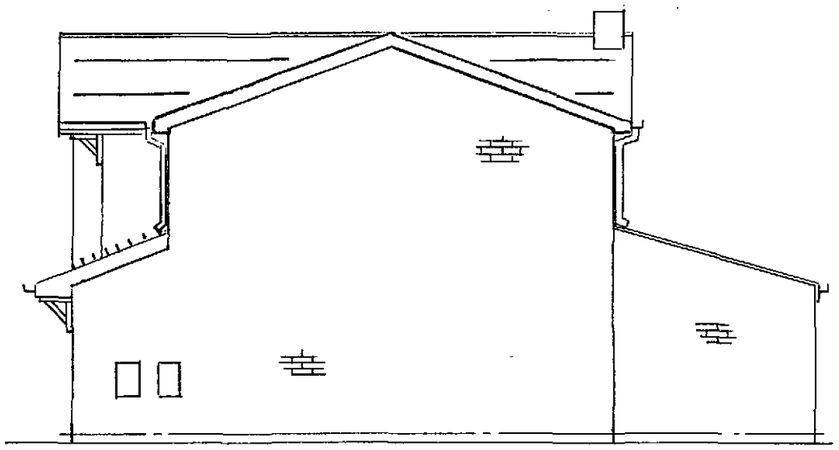


PROPOSED GABLE ELEVATION

Garage door to be taken out including lintel, pier brick frontage and fit white window with Concrete Lintel over.

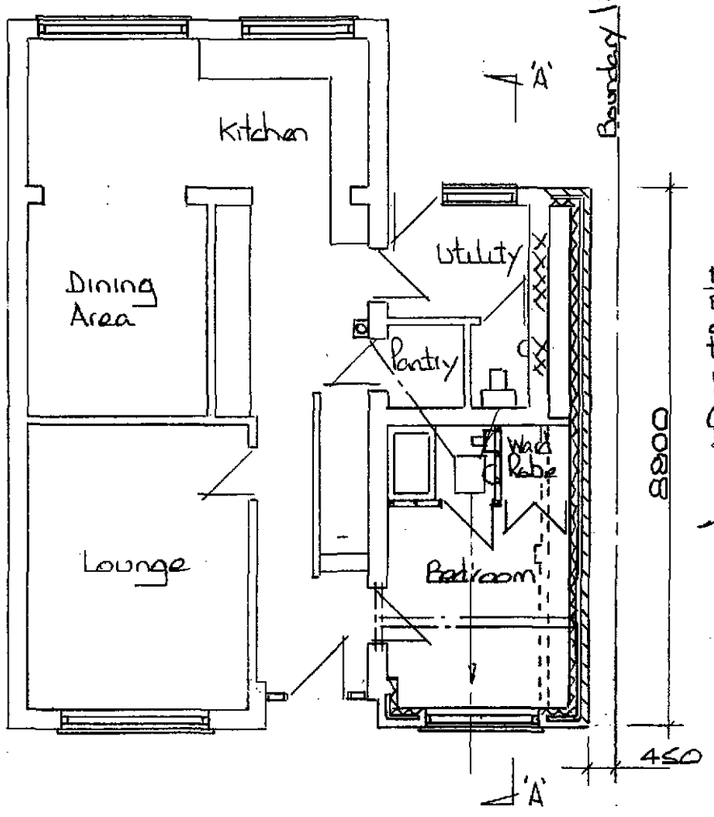

Note
Existing side wall of garage to be taken down to form new bedroom. Existing Electric & Gas meter boxes to be resited on gable

PROPOSED GROUND FLOOR PLAN

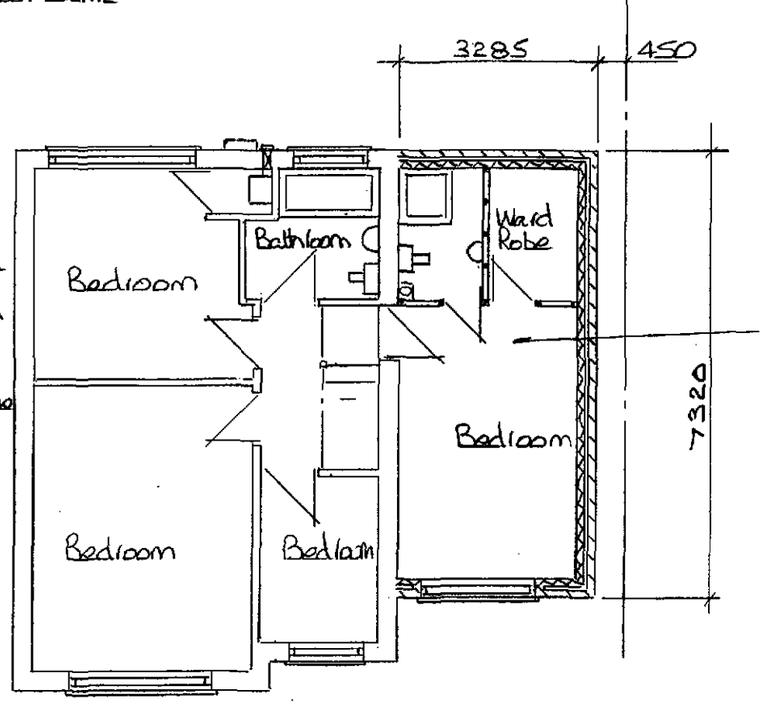

PROPOSED FIRST FLOOR PLAN

Plann[illegible]

17 JUN 2011

Ref: 0411-11

Take out existing window, lintel and brick to form door opening into Proposed bedroom Support over with 2 No Naylor Concrete Lintels. Makegood Plaster and skim, fit int door & frame. (Min 150 end bearing to Lintels

Stud walls to be 100x50 timber stud with 100 mm Quilt Insulation between 12.5mm Plasterboard and skim to both sides and double joists under walls where running parallel