

Proposed bungalow off Lowgate lane
Gosberton Spalding Lincs for S.A.Moore
Scales - as indicated Date - Sept 1998.

SOUTH HOLLAND DC
HOUSING & PLANNING
22 OCT 1998
Ref: 1043/98


EXTERNAL WALLS. - built in DURHAM MELLOW RED STOCK facing bricks by AMBLOW BRICK CO. -all copes and gables to have 3 no. rows oversailing courses - one row alternate stepped headers with 2 no. rows stretchers over. Windows to N.E and S.E. elevations to have stone cills under - 150MM deep with 100MM splay.
ROOF TILES. -to be MARLEY MINIOF (double roman) in smooth RED sand mix.
- Gables to be block DGEE P.V.C.
EXTERNAL FRAMES. -to be all in HARDWOOD and stained MAHOGANY. Glazing to have square leaded lights. Window to gable of N.E. elevation to be feature gothic window.

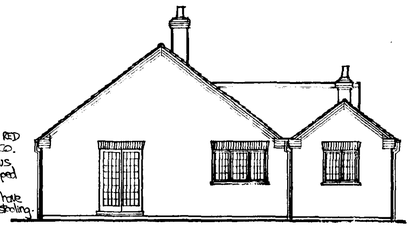

SOUTH WEST ELEVATION. 1:100

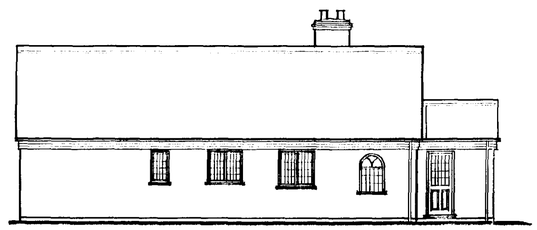


NORTH WEST ELEVATION. 1:100

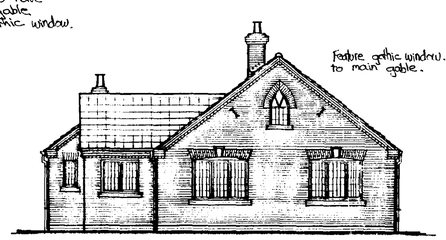

NORTH EAST ELEVATION. 1:100




SOUTH EAST ELEVATION. 1:100

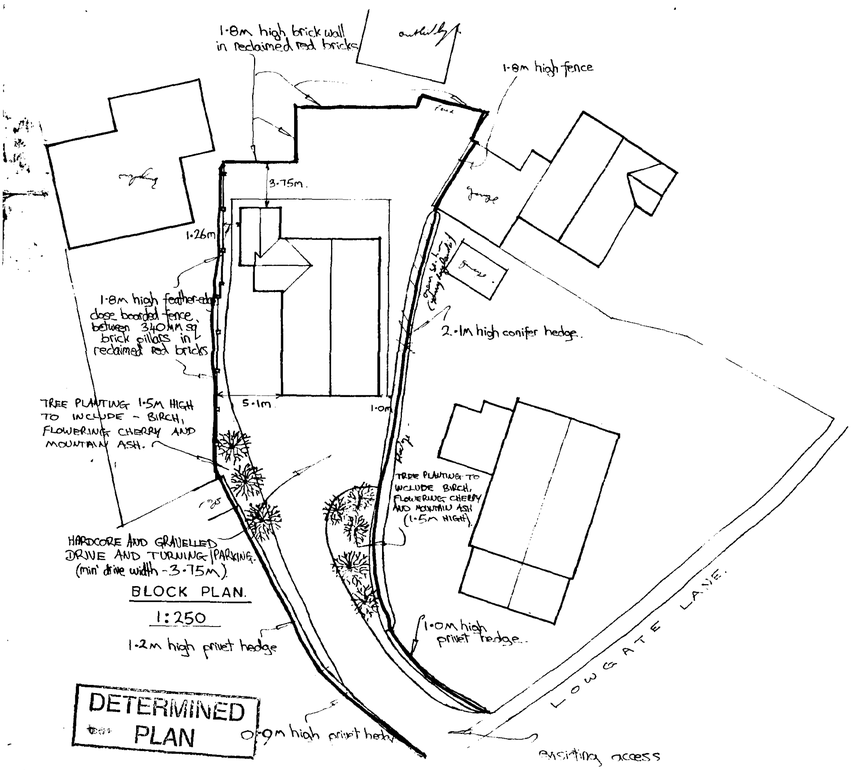

BLOCK PLAN.
1:250

DETERMINED
PLAN

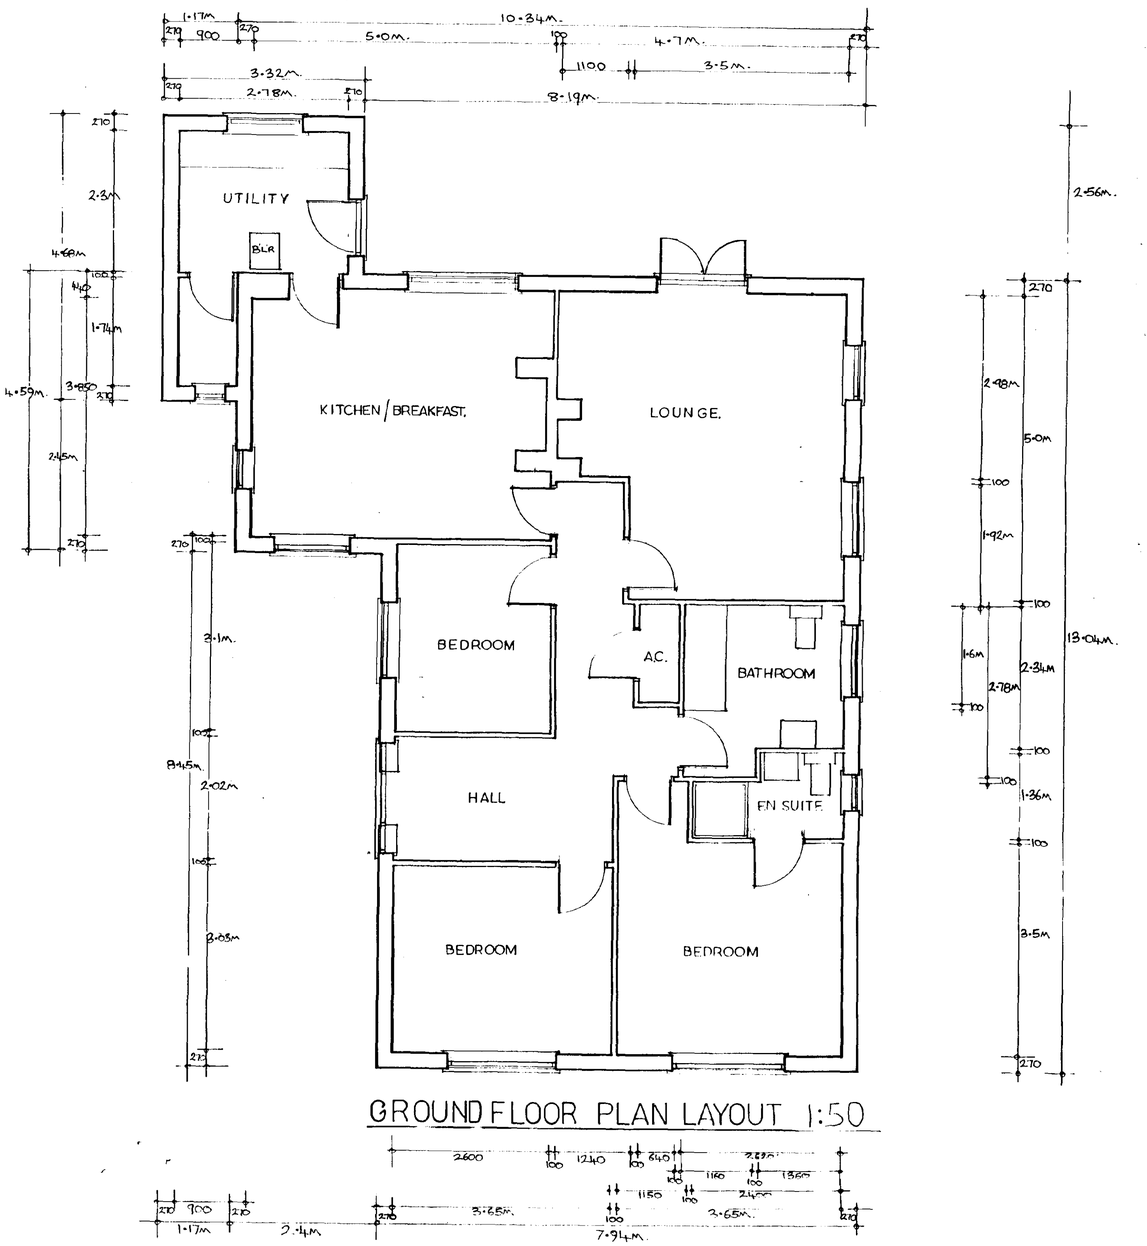

GROUND FLOOR PLAN LAYOUT 1:50