



END ELEVN. (E.)




END ELEVN. (W.)


CONC. PLASTIC ROF COVERING

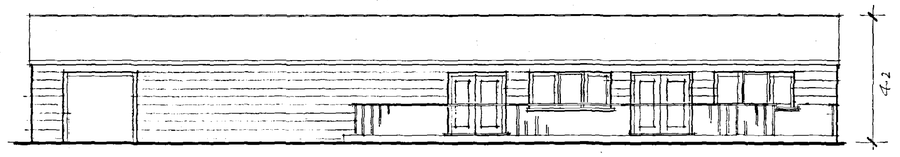


FRONT ELEVN.

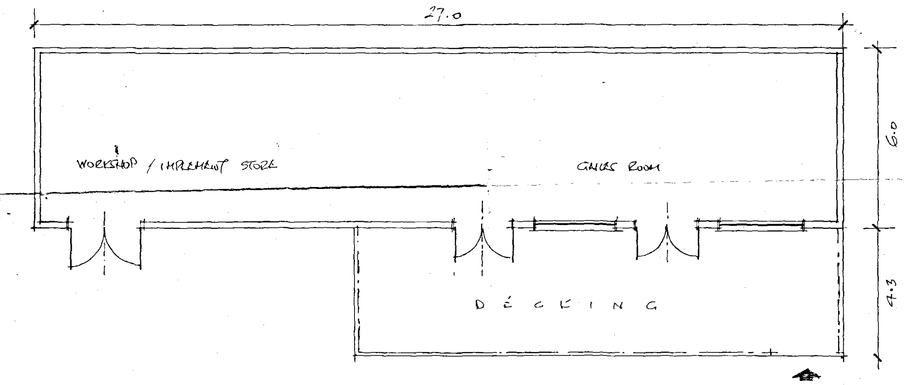

PLAN. (Existing Timber Outbuilding)

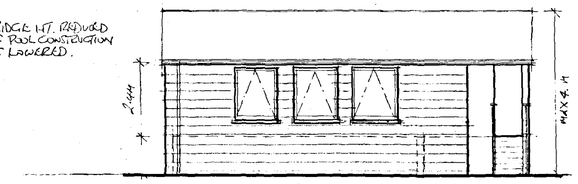

FRONT ELEVATION.

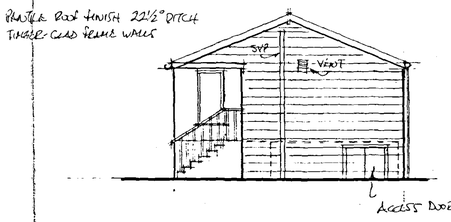


ACCESS DOORS 1702 x 2500 F/N. H/GRADE AS P.A.C.

FENESTRATION IN HW FRAMES TO SIZES INDICATED ON WKSHTS & FULL OPENING LOUVRE & SAFETY GLASS AT LOW LEVEL.

FLOOR & POOL OUTLINE SHOWN DOTTED. PLANT EQUIPMENT SET UNDER FLOOR

END ELEVN.

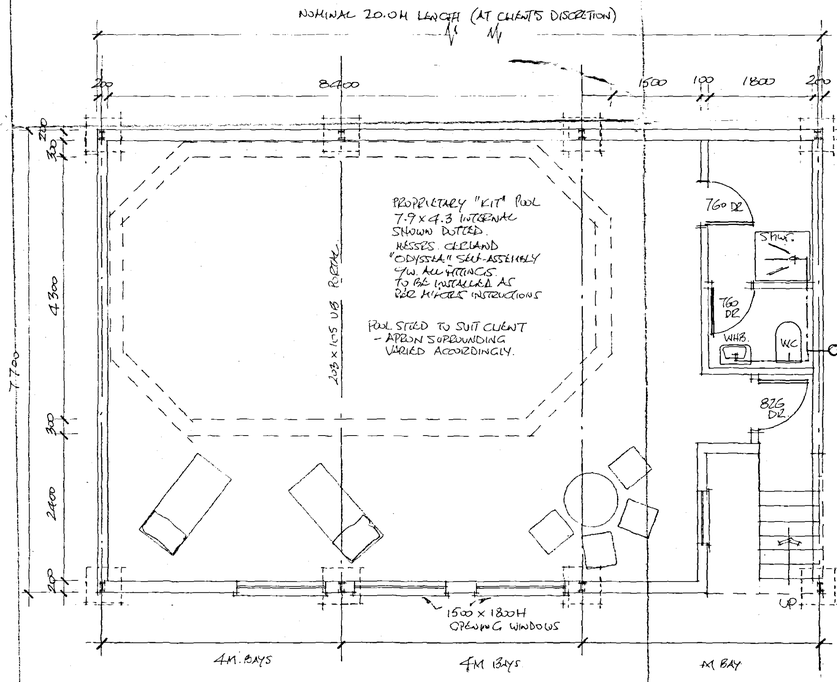

- * LOCAL AUTH'Y BUILDING NOTICE PROCEDURE TO BE FOLLOWED
- * STRUCTURAL CALCS TO BE CONFIRMED BY ENGR. FOR APPROVAL
- * MECHANICAL & ELECTRICAL SPECIALISTS TO PROVIDE SATISFY CERTIFICATES OF COMPLETION.
- * NHBC/ZURICH CERTIFICATION REQ'D. AS NECESSARY
- * FOR LOCATION PLAN SEE SITE LAYOUT DRG. B/2/06

PLAN. (DIAGRAMMATIC)
(Proposed Pool Enclosure)

OUTBUILDING SURROUND TO PRE-FABS. EXTERIOR GDE. PROPRIETARY POOL FORMED BY UB PORTAL FRAME 203 x 105 @ CENTRE CRS. SET TO MIN. 600 x 600 x 900 DEEP CONC. BASES. STR. ENGINEER DESIGNED ROF PURLINS IN CLADN. STEEL BY SPECIALIST, RAFTERS SCAB TO MEET P.A. FOR HT & PATTERN WITH CONC. PANTILE COVERING TO MATCH EXTG. BUILDINGS STRUT & DRAWN FORE BACKED P/BD WITH VOIDS PACKED INSULN. QUILT.

WALLS FRAMED OUT IN TIMBER (PRESSURE TREATED) SFF 2-COURSE 450 x 225 CLASS 'A' CONC. BLOCK PLUS STRIP FOUND'N. CLAD SURFACE IN TEXTURED WEATHERBOARD & LINK INTERNALLY AT CLIENT DIRECTION WITH VOIDS PACKED INSULATION. DPC STRIP UNDER TIMBER PLATES.

PIC WATERS RUN FROM D.G. GULLY TRAPS AT 1:40 FALL TO SVP & CONNECTED TO EXTG. PREMOLE 'KLARGESTER' SYSTEM ALLOW RODDING ACCESS & INSPN. CHAMBERS AS NECESSARY. PROTECT/LAGG IN TAPE RUNS IN TRAFFICKED AREAS.

INTERNAL PARTITIONS IN TIMBER STUD FACED BOTH SIDES PLASTERED P/BOARD FOR DECT DOOR & FURNITURE FIXINGS ETC. INCLUDED.
SERVICES EXTENDED FROM EXTG. SUPPLIES BY SPECIALIST ENGR'S. C/W. DIST. BOARD & ISOLATORS

FLOOR DECKING AS PER CLIENT DIRECTION TO SUIT POOL LAYOUT. INTERMEDIATE BEARERS AS PER P.A. OFF CONC. BLOCK PIERS & FOUNDNS.

Revisions 'A' NOTES & DIMS. ADDED TO SUIT POST-CLIENT VARNS.

Title
POOL ENCLOSURE (GENERAL ARRANGEMENT) & TIMBER OUTBUILDING.

Address
HOLLYBUSH FARM
NORTHGATE
GOSBERTON.

john clayton
sandacre lodge
north drove
quadring fen
lincolnshire
pe11 4qs

Drawn JC
Scale 1:50 | 1:100
Date JAN/07
No. L1/1/07
Amdmt A.

SHDC
PLANNING & DEVELOPMENT
- 7 AUG 2007
Ref. 1092/07