
ALL DIMENSIONS AND SETTING OUT ARE TO BE VERIFIED ON SITE AND ALL DISCREPANCIES REFERRED TO THE ARCHITECT BEFORE WORK COMMENCES.
COPYRIGHT RESERVED

DSN.	DATE	DESCRIPTION
A	10/12/97.	MODIFICATIONS.

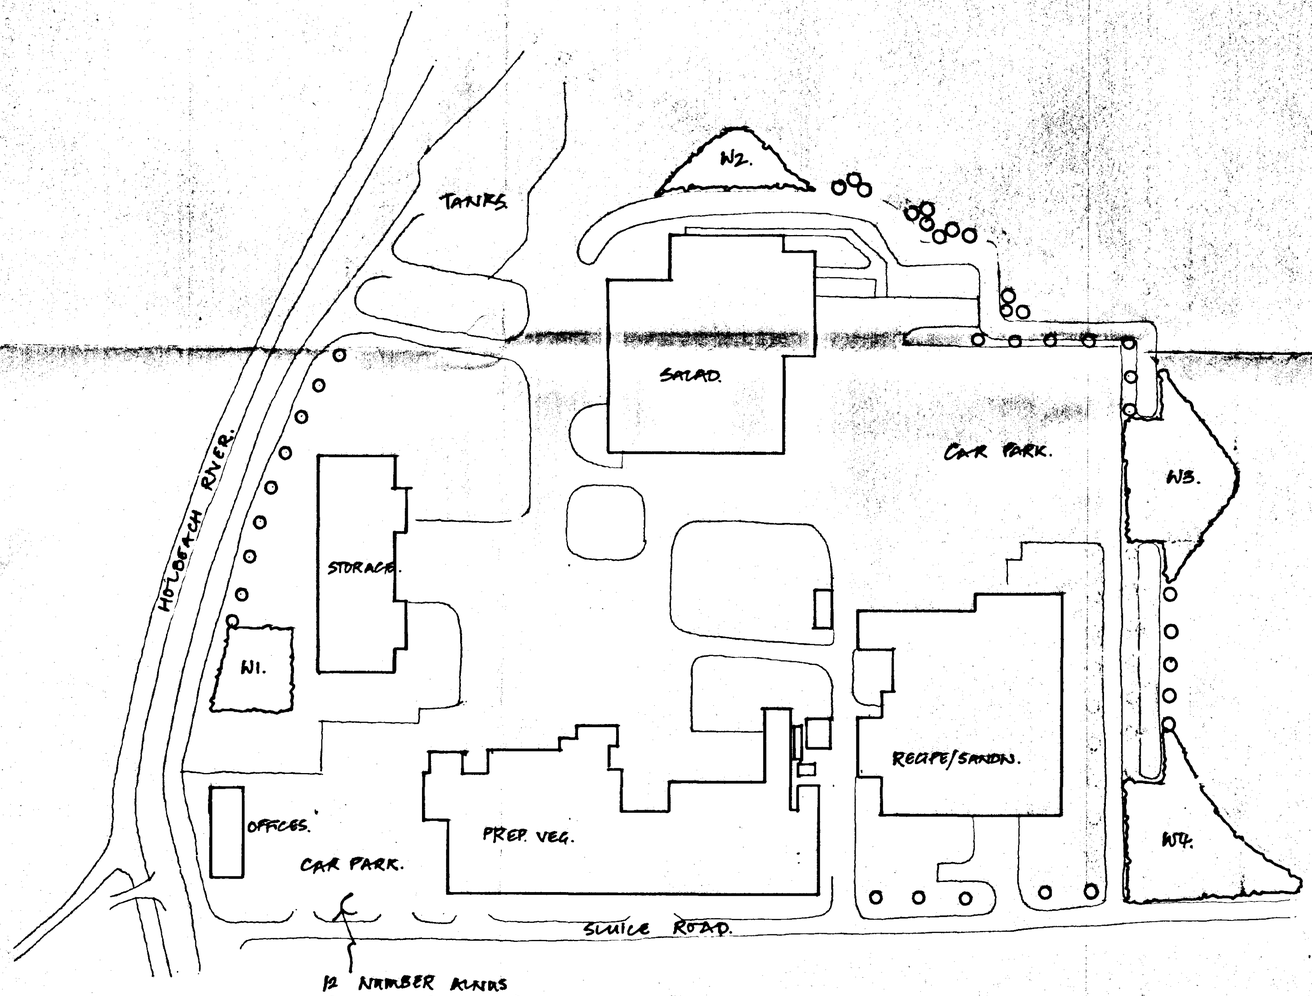

½ NUMBER ALNUS CORDATA PLANTED IN CAR PARK IN ACCORDANCE WITH ACCOMPANYING DETAIL.

LOCATIONS DETERMINED BY ARCHITECT ON SITE.

WOODLAND MIX.

	%	W1	W2	W3	W4
Castanea sativa.	5	12.	10	28.	28.
Betula pubescens.	15	37	30	84	84
Corrylus avellana.	10.	25.	20	56	56.
Acer campestre.	10.	25.	20	56	56.
Fraxinus excelsior.	15.	37	30	84	84.
Populus tremula.	5	12	10.	28	28.
Quercus robur.	25	56.	95.	140	140.
Quercus rubra.	5.	12	10.	28	28.
Tilia cordata.	10.	25.	20	56	56.

All planted @ 2.2m centres in 0.6m tubex shelter with 1½" x 1m treated wooden stake.
All whips 45 - 60cm B.R.

Avenue trees.

o 50 Alnus cordata 8-10 cm girth B.R. planted @ 15 m centres. All single staked to ⅓rd height of tree. Tied using rubber tie and spacer.

SOUTH HOLLAND D.C.
HOUSING & PLANNING
12 DEC 1997
Ref: 1291/97.

DETERMINED PLAN

client
TINSLEY FOODS LTD

project
OVERALL DEVELOPMENT PLAN

drawing
LANDSCAPING PLAN

scale	date	drawn	checked
1:1250	OCT 97	SW	

drawing no. 5291T/24 revision A

JOHN ROBERTS ARCHITECTS LIMITED
ARCHITECTS DESIGN AND PLANNING CONSULTANTS
9 James Street Lincoln LN2 1QD Tel 01522 568441 Fax 01522 512866