

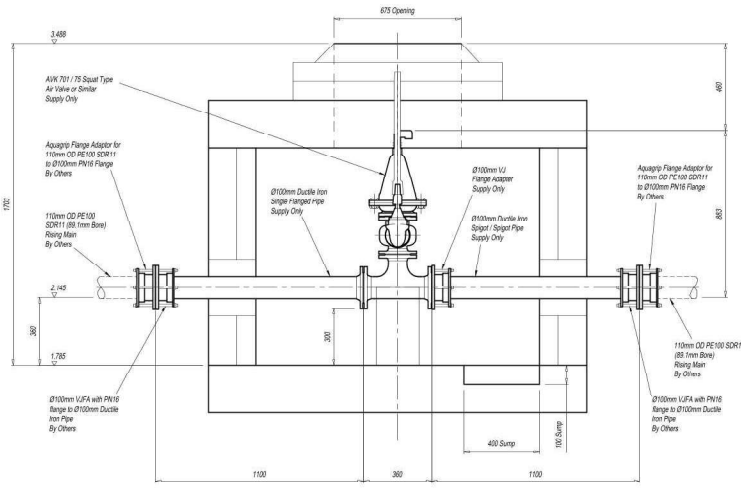


VIEW ON SECTION Y - Y

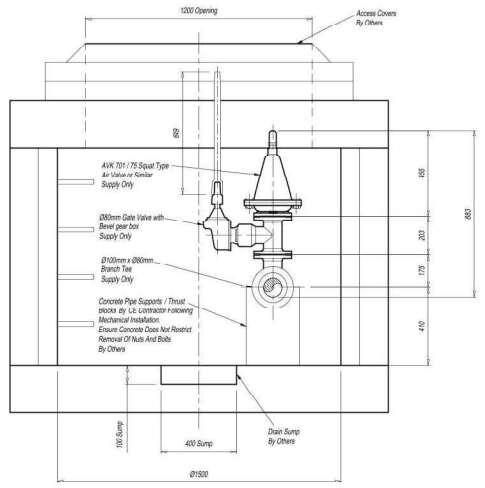

VIEW ON ARROW Z - Z

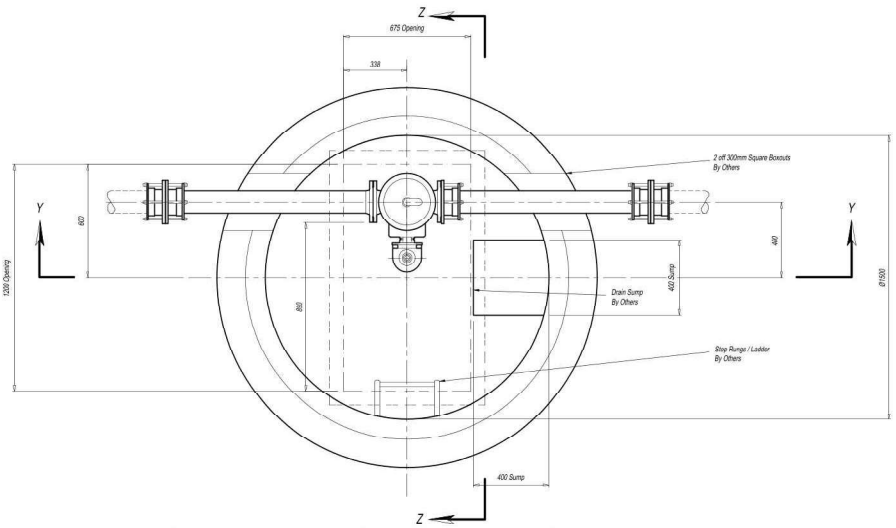

All Cut Pipe Joints As Close To Structure As Possible Consistent With Making The Joint.

NOTES

1. DO NOT SCALE.
2. UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES AND ALL INVERTS IN METRES AOD.
3. ALL CIVIL WORKS IS THE RESPONSIBILITY OF THE DEVELOPER OR CONTRACTOR INCLUDING FIXING OF STEELWORK SUCH AS ACCESS COVERS AND PENSTOCKS ETC. INSTALLATION OF CABLE DUCTS, BENCHING AND MAKING GOOD AROUND PIPES AFTER INSTALLATION.
4. REINFORCING BARS ARE TO BE A MINIMUM OF 75MM BELOW THE SURFACE. ANY STRUCTURAL DETAILING / CIVIL WORKS SHOWN SHOWN ON THIS DRAWING ARE ILLUSTRATIVE ONLY UNLESS OTHERWISE STATED AND SHOULD NOT BE USED FOR CONSTRUCTION.
5. BENCHING IS TO BE FORMED AFTER PUMP INSTALLATION AND TO BE IN ACCORDANCE WITH THE APPROPRIATE DESIGN AND CONSTRUCTION GUIDANCE AND ADOPTING AUTHORITY SPECIFICATION.
6. UNLESS OTHERWISE STATED, ALL DUCTS ARE TO BE Ø100MM AND BE COMPLETE WITH DRAW ROPES. SERVICE DUCTS TO BE TO THE UTILITY SUPPLIERS SPECIFICATION.
7. DUCT ROUTES ARE SHOWN DIAGRAMMATICALLY ONLY. ALL DUCTS LAID IN THE MOST DIRECT ROUTE TO SUIT THE SERVICE BEING CARRIED AVOIDING ANY ACUTE CHANGES OF DIRECTION.
8. LEVEL CONTROL POSITIONS ARE SHOWN DIAGRAMMATICALLY ONLY. THEY WILL BE POSITIONED AWAY FROM OBSTRUCTIONS AND BE READILY ADJUSTABLE AFTER INSTALLATION.

REV	DATE	DESCRIPTION	DR'n	CHK'd	APR'd
A	14/08/24	Washout Chamber Removed and Air Valve Chamber Added	K.T.		K.A.

FOR APPROVAL

PDAS
TOTAL WATER EXPERTISE
DESIGN INSTALL PROACTIVE

BUILDING 4-5, HYDRO PENALTY BUSINESS PARK, PIRBRIGHT, SURREY, GU24 0NZ
OFFICE TEL No. (01483) 830530
WEBSITE WWW.PDAS.TD.CO.UK

PROJECT	LIME WALK LONG SUTTON
TITLE	FOUL WATER PUMP STATION AIR VALVE CHAMBER AT CHAINAGE 62.258M
CLIENT	H A ARCHITECTURAL SERVICES

SCALE AT A1	1:10	SCALE AT A3	1:20
SITE ID	3617	APR'D K.A.	DATE 14-08-2024
WORKS NO.	21847	CHK'D K.A.	DATE 14-08-2024
DRAWING NUMBER	3617 21847 007	DR'n K.T.	DATE 14-08-2024

DRAWING PROVIDED COURTESY OF PDAS LTD. UPON HANDOVER ALL DOCUMENT CONFIDENTIALITY AT CLIENTS DISCRETION