




SECTION

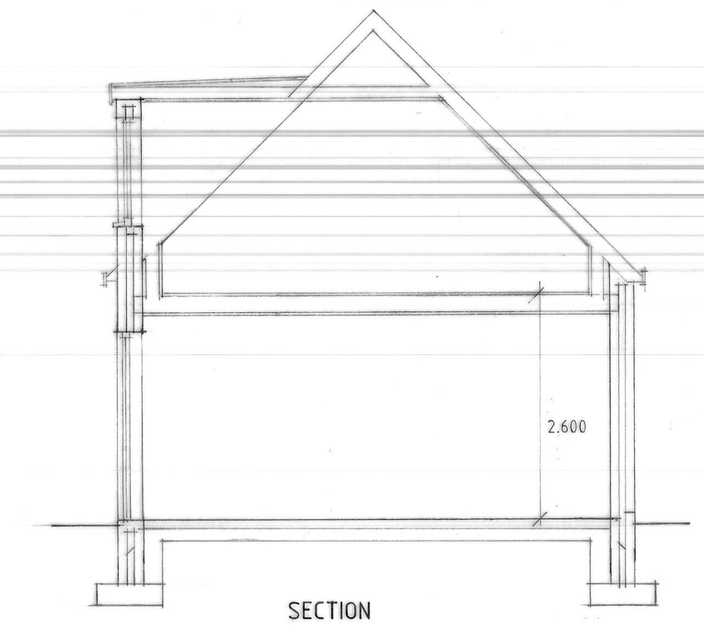


FRONT




SIDE

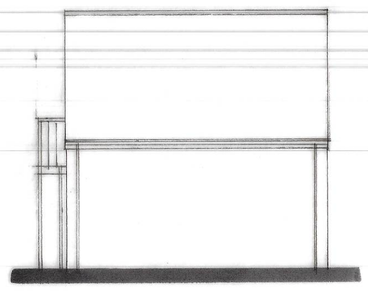


REAR

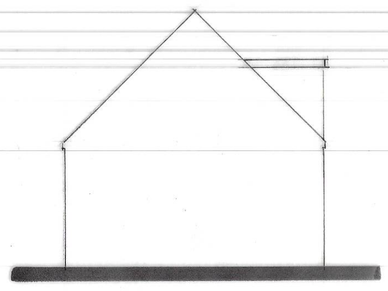


SIDE

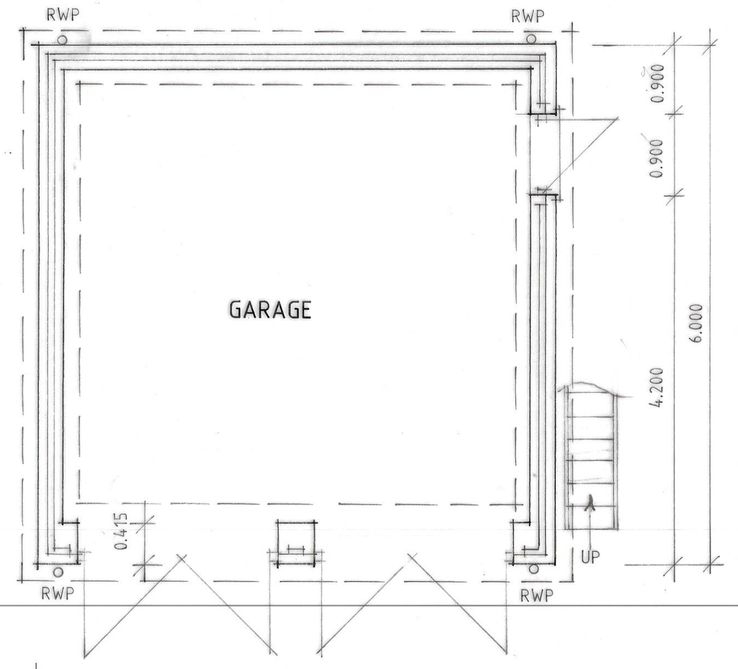


GROUND FLOOR PLAN

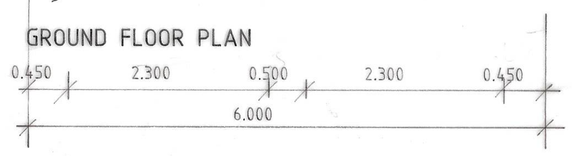

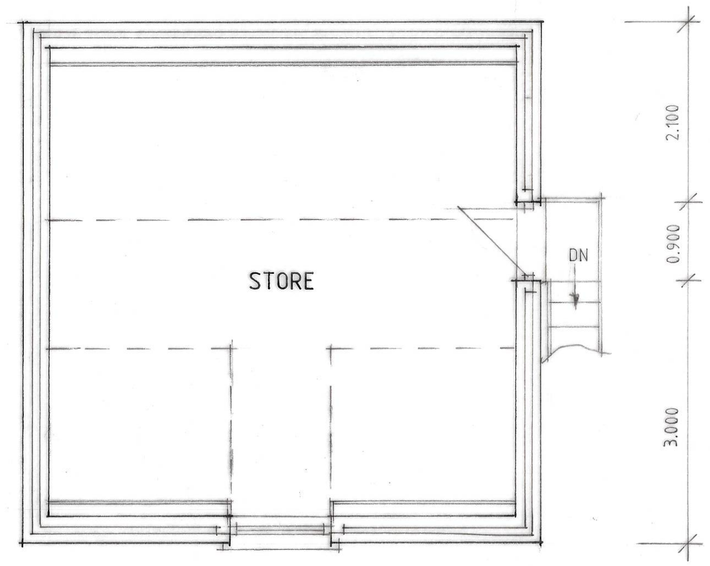

FIRST FLOOR PLAN



Build Garage/Store in the manner shown.

Roof tiles to be second-hand pantile to match dwelling.

Facing bricks to be Reclamation Shire Blend from Gibbs & Dandy.

Roof pitch to be 45°.

Roof trusses to be raised tie/Room-in-Roof type.

Provide 600 wide metal stairs externally to First Floor.

Private Stairs
Stairwell formed by timber trimmers and load bearing walls (see plan). Provide timber balustrading to open side of stairs 900mm above pitch line and 1000mm high to stairwell opening to act as guarding and to be capable of resisting a horizontal force of 0.36 KN/m. Balustrading to be vertical type, not horizontal or ranch style. No parts of stairs to have any gaps greater than 99mm. Provide timber handrail to top of balustrading or independently 900mm above pitch line. Ensure minimum headroom above pitch line is 2000mm. Total rise: See plan. Maximum rise: 220mm. Minimum going: 220mm. Maximum pitch: 42°. Read in conjunction with Approved Document K.

Valleys
Use proprietary fibreglass valleys or provide Code 4 lead to valleys to make completely watertight.

Rainwater Goods
PVC rainwater goods 110mm half-round gutters and 68mm diameter downpipes.

Surface Water Drainage
To be proprietary 110mm diameter p.v.c. pipes flexible joined to fall 1:70 bedded in 100mm pea gravel. Pipes to discharge into 1200mm diameter soakaways sited 5000mm away from buildings.

Ceilings
To all insulated roof ceilings provide 12.5mm Gyproc Duplex plasterboard of 10kg/m² or similar and either 5mm skim or Artex finish. To remaining ceilings provide 12.5mm Gyproc plasterboard or similar with finishes as above.

Garage Floor Construction
100mm concrete oversite on 1200 gauge polythene d.p.m. on minimum 150mm, maximum 600mm well blinded and compacted hardcore. If garage is integral to house finished floor level to be 100mm below that of house. Wall d.p.c. to lap floor d.p.m. by a minimum of 50mm.

Garage Cavity Walls
275mm cavity walls of 100mm facing bricks, 75mm cavity and 100mm internal block skin. Insulation to inner wall to achieve 0.25 u/value. Cavity wall ties to be stainless steel type spaced 900mm horizontally and 450mm vertically to BS1243, 1978.

Lintels
All coded lintels as stated in Schedule or marked on plan to be by I.G. To be installed in strict accordance with manufacturers instructions. Form d.p.c. cavity tray above all lintels. To all exposed lintels i.e. not sheltered from overhanging eaves, etc. to have proprietary weepholes to joints of brickwork at approximately 450mm c/c. To be confirmed on site with Building Control Surveyor.

Opening at eaves level to be L1/E lintels by I.G. or similar approved.

Sub-structure Walling
100 mm Class A dense concrete blocks. Bitumen felt d.p.c. to external walls 150mm above ground level. Weak mix infill to base of cavities to terminate 225mm below lowest d.p.c. level.

Foundations
As indicated on plan provide concrete strip foundations. To cavity walls provide 700mm wide x 225mm thick and to 100mm walls provide 450mm wide x 225mm thick, unless noted otherwise. To non-load bearing internal walls thicken out ground floor oversite concrete to 450mm wide x 200mm thick. Widen foundations at chimney breast accordingly and make 300mm thick. Foundations to be taken down to an approved firm base, subject to local authority specifications. Concrete to be ST3 grade unless noted otherwise. Proximity of existing and proposed trees are to be taken into account in accordance with N.H.B.C. chapter 4 when determining foundation depth.

I.G. Type L1/S75 lintels to cavity walls and I.G. type internal lintels to 100mm internal walls unless stated otherwise. To be confirmed on site with Building Control Surveyor.

Dormer Wall Construction
Vertically hung tiles (manufacturer same as main roof tiles) on 19mm x 38mm timber battens on breather membrane on sheathing ply fixed to studs with GA3050Z Celotex between studs, maintain a 50mm cavity. 50mm x 125mm vertical studs at 400mm centres built off doubled-up rafters as stated. GA3012Z fixed to internal face of studs with taped joints and finished with plasterboard and skim.

Flat Roof Construction (Warm Deck)
12.7mm white spar chippings bedded on bitumen on 3 no. layers built up felt (first layer asbestos based) on insulated roof deck comprising felt on Celotex TD4000 126mm insulation on 12mm external grade plywood decking on 50mm to 0mm timber firrings securely spiked to treated timber joists (size stated on drawing). Provide 30 x 5mm mild steel anchor and lateral restraint straps to joists fixed to walls at maximum 1200mm c/c. Provide suitably sized fascia board. Form all necessary felt drips including tilting fillets and keep felt drips clear of fascia boarding. If flat roof intersects with pitched roof ensure flat roof felt laps under felt of pitched roof by a minimum of 600mm.

A - INF. ADDED - 17.11.20

Status DESIGN
CONSULTANTS IN ARCHITECTURE & PLANNING

PROPOSED ALTERATIONS & GARAGE AT 18 GEDNEY ROAD, LONG SUTTON FOR FOR

PETER COOK
&
LISA STOCKDALE.

GARAGE

1:50 1:100 SD20-030/3

NOV.20 B.GILHAM.

2 Edinburgh Walk, Holbeach,
Spalding, Lincs. PE12 7AP
Tel: 01406 424343 Fax: 01406 490702